

## ULTRA LIFE W5W

Up to four times longer lifetime




### Extra lifetime

Up to four times longer lifetime compared to standard auxiliary lamps




### More durability

For longer replacement cycles and additional reliability and comfort



### Wide product range

Fits for most common auxiliary lamp types

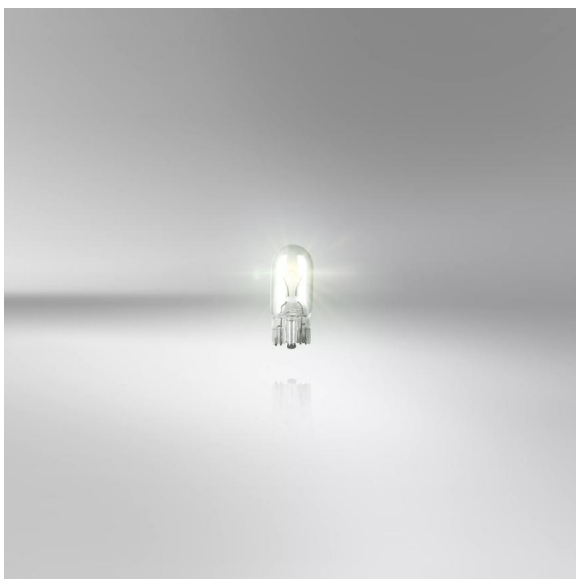

### The durable light with up to four times longer lifetime

With ULTRA LIFE, you choose durable signal lamps for your car. The lamps provide a long life span - up to four times longer lifetime compared to standard lamps - and last up to 100,000 km (with an average annual mileage of 14,259 km and 60% light on). They are therefore ideal for frequent drivers.

Technical data

Product information

|                                             |                |
|---------------------------------------------|----------------|
| Application (Category and Product specific) | Auxiliary lamp |
|---------------------------------------------|----------------|

General Product Information

|                        |         |
|------------------------|---------|
| Global order reference | 2825ULT |
|------------------------|---------|


Electrical Data

|                       |        |
|-----------------------|--------|
| Power input           | 5 W    |
| Nominal voltage       | 12 V   |
| Nominal wattage       | 5 W    |
| Test voltage          | 13.5 V |
| Power input tolerance | ±10 %  |

Photometric Data

|                         |       |
|-------------------------|-------|
| Nominal luminous flux   | 50 lm |
| Luminous flux tolerance | ±20 % |

Physical Attributes & Dimensions



|                |           |
|----------------|-----------|
| Diameter       | 10.0 mm   |
| Product weight | 1.38 g    |
| Length         | 26.8 mm   |
| Lamp base      | W2.1x9.5d |

Lifetime Data

|             |         |
|-------------|---------|
| Lifespan B3 | 700 hr  |
| Lifespan Tc | 1500 hr |

Product datasheet

Capabilities

|            |     |
|------------|-----|
| Technology | AUX |
|------------|-----|

Certificates & standards

|              |     |
|--------------|-----|
| ECE category | W5W |
|--------------|-----|

Environmental & Regulatory Information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |                                               |
|-----------------------------------------------------------------------|-----------------------------------------------|
| Primary article identifier                                            | 4062172394734   4008321413024   4008321415189 |
| Candidate list substance 1                                            | No declarable substances contained            |
| Declaration no. in SCIP database                                      | No declarable substances contained            |

Country specific information

| Product code  | METEL code  | SEG-No. | STK-Number | UK Org |
|---------------|-------------|---------|------------|--------|
| 4008321413024 | OSRA2825ULT | -       | -          | -      |

Logistical Data

| Product code  | Product description | Packaging unit<br>(Pieces/Unit) | Dimensions (length<br>x width x height) | Volume               | Gross weight |
|---------------|---------------------|---------------------------------|-----------------------------------------|----------------------|--------------|
| 4008321413024 | ULTRA LIFE W5W      | Unpacked<br>1                   | 26 mm x 10 mm x<br>10 mm                | 0.22 dm <sup>3</sup> | 1.00 g       |
| 4008321413048 | ULTRA LIFE W5W      | Shipping carton box<br>50       | 148 mm x 115 mm x<br>55 mm              | 0.94 dm <sup>3</sup> | 154.00 g     |
| 4062172394734 | ULTRA LIFE W5W      | BLI ECO<br>2                    | 95 mm x 17 mm x<br>135 mm               | 0.22 dm <sup>3</sup> | 14.00 g      |
| 4062172394741 | ULTRA LIFE W5W      | Shipping carton box<br>20       | 142 mm x 104 mm x<br>104 mm             | 1.54 dm <sup>3</sup> | 170.00 g     |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

| File                                                                                |                                                         |
|-------------------------------------------------------------------------------------|---------------------------------------------------------|
|  | User instruction<br>GPRS_Safety symbols instructions    |
|  | Addon Technical Information<br>Product Certificates AUX |

|                                                                                   |                                                             |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------|
|  | ref_pim_amsproduct360degreeimages<br>ULTRA LIFE W5W 2825ULT |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------|

**Application advice**

For more detailed application information and graphics please see product datasheet.

**Disclaimer**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.



**OSRAM**