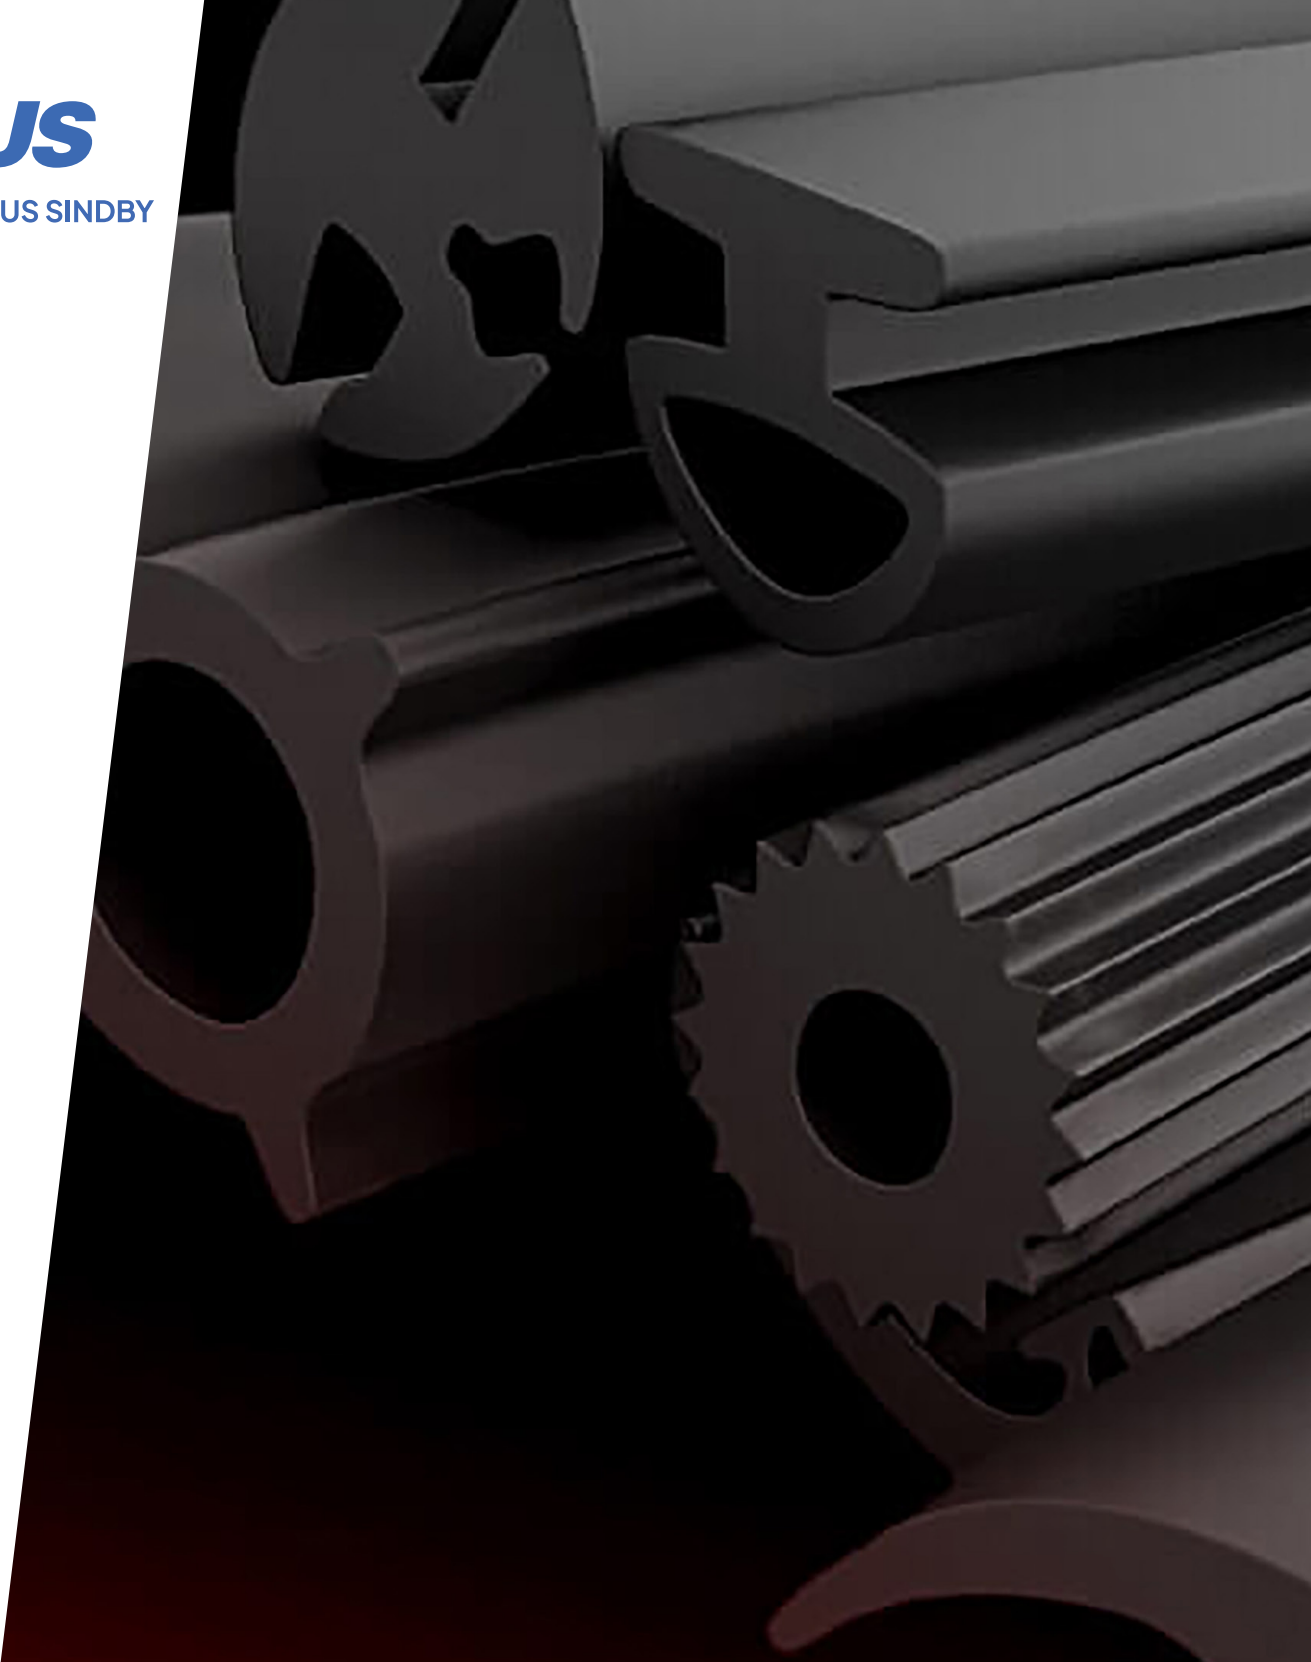


BIBUS

BIBUS SINDBY



Profler 9

BEMÆRK

Tegningerne i dette katalog er ikke målfaste. Alle mål er i mm, hvis ikke andet er opgivet.

Visse profiler lagerføres ikke men hjemtages kun på bestilling og ud fra mængde.

Afklippede profiler tages ikke retur.

NOTE

The drawings in this catalog are not dimensionally accurate. All dimensions are in mm unless otherwise stated. Some profiles are not kept in stock, but are only available on order and based on quantity. Cut profiles are not returnable.

Velkommen

BIBUS SINDBY A/S er et solidt og velkonsolideret import- og handelsfirma, der har industrien og opbyggere som de to største kundegrupper. I de mere end 100 år firmaet har eksisteret, er en videnbank bygget op omkring indkøb og udvikling af kvalitetsprodukter primært til industrien. Sund fornuft og kvalitet er nøgleordene for al handling i virksomheden. Vi har været i konstant udvikling siden starten og har skabt en virksomhed, der er rustet til de stigende udfordringer og muligheder i industriens utallige niches.

Adm. direktør Keld Hansen er i dag manden bag BIBUS SINDBY. I 2007 overtog BIBUS AG virksomheden efter den tidligere ejer og Sindby-familien, der siden 1918 har drevet firmaet over tre generationer. Virksomheden har løbende udviklet sig med kundeklientellet.

Energioptimering

BIBUS SINDBY A/S iværksatte i september 2022 en proces, hvor vi gennemgik vores el- og gasforbrug. Med en ny investering i belysning samt en simpel adfærdss ændring, lykkedes vi med at reducere vores elforbrug med over 40%. Vi offentliggør vores forbrug internt hver gang der er mærkbare ændringer, pt er vi fokuseret på at vise vores opstart med solceller og forbrugsoptimering.

Det gør vi for konstant at holde hinanden op på bedre forbrugsvaner. Vil du høre mere om vores tiltag, så er du altid velkommen til at kontakte os.

We care about nature

Hos BIBUS SINDBY A/S har vi taget et aktivt valg for at mindske tab af biodiversiteten. Helt konkret har vi etableret et stort udendørsområde med vandhul, insekthoteller, sandbade, tørvestabler og frugttræer til bestøvning. Du kan følge udviklingen på vores hjemmeside eller gøre som vores medarbejdere – gå med på en tur rundt på de naturlige stier, kig dig omkring eller hold en pause ved bålstedet og lad sanserne få en anderledes oplevelse i en travl hverdag. Vores "have" er et fælles projekt, og derfor er det naturligt, at vores jubilarer udvælger det træ eller den busk, de ønsker at have stående i fremtiden.

Udadtil prøver vi at få vores leverandører til at tage aktivt stilling til, hvad lige netop de kan gøre. Alene kan vi ikke redde alverden – men sammen en god del. Vi vil altid gerne inspireres og udfordres, så har i nogen bud på, hvordan vi bliver endnu bedre så sig endelig til.

Vores vigtigste ressource

Det er vores medarbejdere! Vi ønsker at dyrke det hele menneske. Det gør vi ved at interessere os for hinanden.

Vi ønsker, at vores medarbejdere har et sundt familieliv, et aktivt fritidsliv og et meningsfyldt arbejdsliv.

Kort sagt: Døgnet har 24 timer – så en tredjedel med fuld fokus på firmaet bør og skal være nok. Så er der også energi til at løfte i fælles flok, når det indimellem kræves. Vi ønsker at tiltrække alle slags mennesker, og vi ønsker, at alle skal have lige rettigheder for at få en uddannelse og karriere, uanset etnicitet, religion, handicaps eller køn.

For tiden gøres dette ved, at vi støtter håndbold og fodbold spilleres mulighed for at kombinere elitesport og uddannelse. Firmaets børn samt psykisk handicappede. Det kan du læse mere på vores hjemmeside under sponsorer.

Vores værdisæt med få ord

Hos BIBUS SINDBY A/S tager vi ordet ORDENTLIGHED meget alvorligt.

Vi ved at det er et ældre og lidt støvet ord, men det dækker over den måde, vi ser på verden.

- Vi ønsker kun at samarbejde med leverandører, der overholder gældende miljøregler
- Vi tager kraftigt afstand fra tvangs- og børnearbejde
- Vi aflægger jævnligt besøg hos vores leverandører, for at sikre og præge, at vi deler et fælles værdigrundlag
- Vi sikrer, at de medarbejdere vi vælger følger og efterlever disse værdier

Vi prioriterer vores værdier højere end kortsigtet profitjagt, da det på den lange bane har vist sig, at udmønte i bedre resultater

Du kan læse vores Code of Conduct for at få mere information om vores retningslinjer.

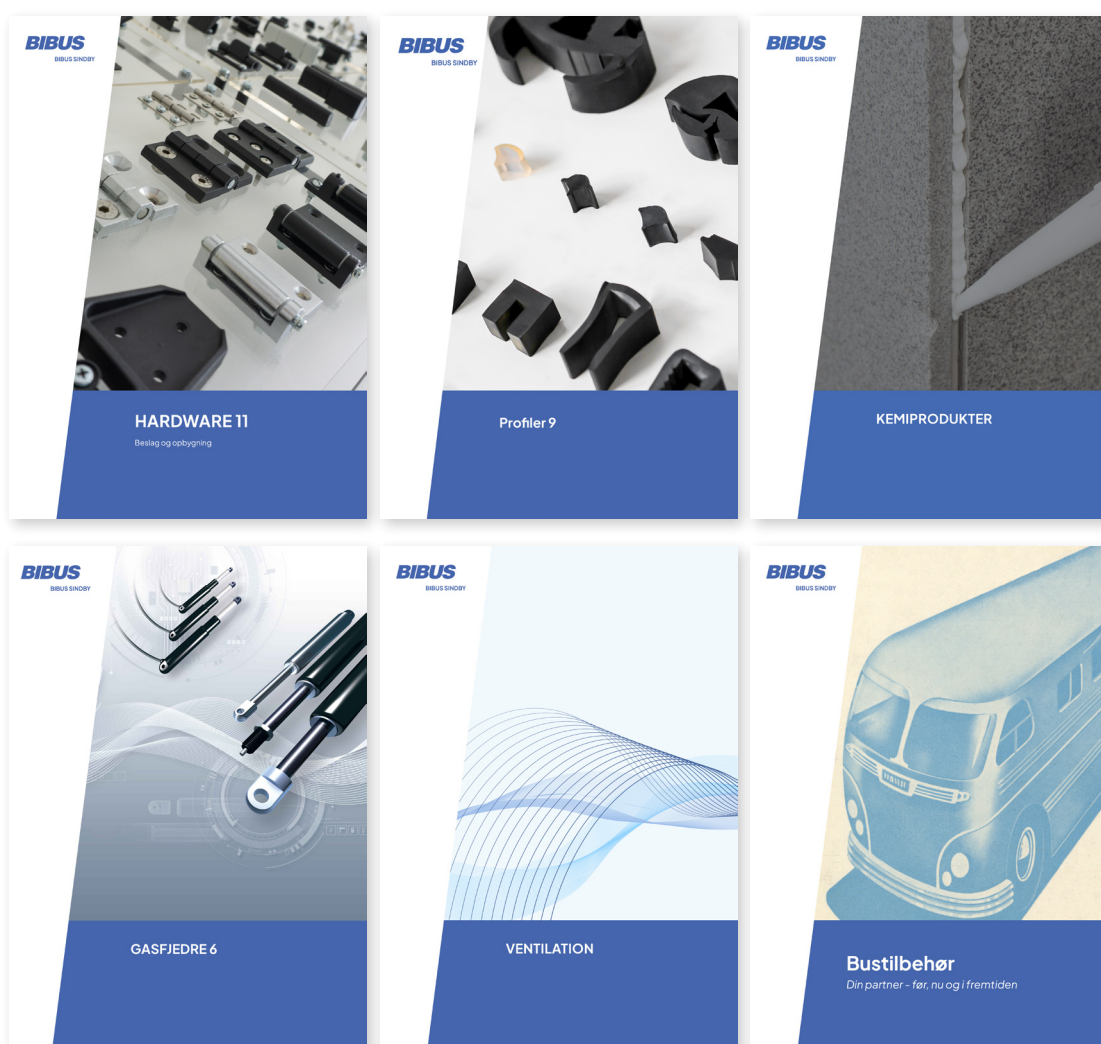
Vi finder en løsning

Som nævnt arbejder vores medarbejdere ofte tæt sammen med kunden for at finde den ideelle løsning. Gennem deltagelse på messer over hele verden sikres det, at vi altid er opdateret på den nyeste viden og de nyeste produkter. På den måde opbygger vi et stort og globalt net af forbindelser til producenter.

Hvert år udvikles +400 nye produkter i samarbejde med kunderne, enten som eksklusive produkter eller som nye lagervarer hos os. Dette aftales fra projekt til projekt og kommer an på, hvad der er mest fordelagtigt for begge parter.

Vi ser frem til vores samarbejde!

Med venlig hilsen
Keld Hansen



















Vi har meget mere at byde på

Kontakt os, hvis du ønsker et af vores andre kataloger.











Telefon: 75 88 21 22 | Mail: bibus@bibus.dk

















Eller køb online på www.bibus-shop.dk

















6	KANTLISTER EDGE TRIMS
23	RUSTFRI STAINLESS STEEL EDGE TRIMS
24	BRANDHÆMMENDE FLAME RETARDENT EDGE TRIMS
26	SILIKONEKANTLISTER SILICONE EDGE TRIMS
31	POM-PROFILER POM-PROFILES
33	GUMMISNOR RUBBER CORD
34	SPECIALPROFILER SPECIAL PROFILES
43	SILIKONEPROFILER (SKAFFEVARER) SILICONE PROFILES (SPECIAL ORDER ITEMS)
47	CO-EKSTRUDEDE PLASTPROFILER CO-EXTRUDED PLASTIC PROFILES
50	U-PROFILER U-PROFILES
55	P-PROFILER P-PROFILES
57	RUDEPROFILER GLAZING SECTIONS
60	LÅSEKILER FILLER STRIPS
61	SVAMPEGUMMI SPONGE RUBBER
70	GLASBÅND WINDOW SEALS
71	CELLEGUMMI CELLULAR RUBBER
72	FENDERLISTER FENDER LISTS
75	SICO TRIM SICO TRIM
78	GUMMIBUFFER RUBBER BUFFER
84	VIBRATIONSDÆMPERE VIBRATION MUFFLER
93	FENDERE FENDERS
96	BØRSTE- OG FLOCKLISTER BRUSH SECTIONS
99	LYDISOLERING SOUNDPROOFING
102	GUMMIPLADER FRA KINA RUBBER SHEETS FROM CHINA
111	GUMMIMÅTTER RUBBER MATS
118	GUMMISTROPPER RUBBER STRAPS
121	BUMPERS BUMPERS
122	POLIALL POLIALL
123	OPPUSTELIGE TÆTNINGER INFLATABLE SEALS
125	TILBEHØR EQUIPMENT
127	EGENSKABER PROPERTIES
129	VARENUMMERINDEKS ITEM NUMBER INDEX

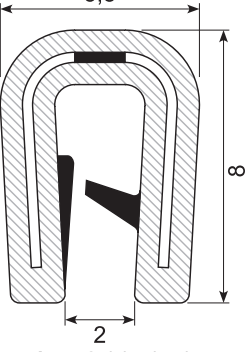







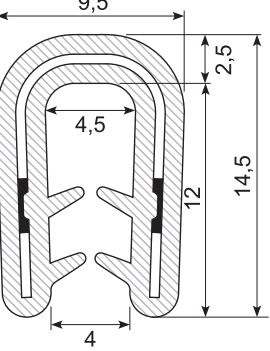


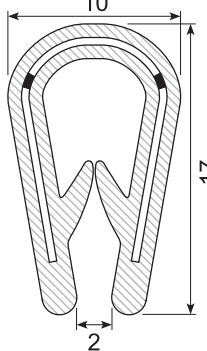



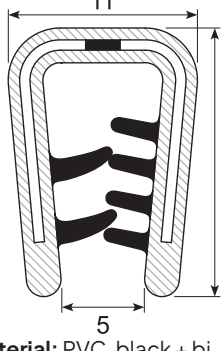
33.306  Material: PVC, black + bi Grip range: 1 - 2 mm Hardness: SH 75 / 65 Insert: 15 x 0,3 mm steel	33.409 / 33.401G  Material: PVC, black / grey Grip range: 1 - 2 mm Hardness: SH 78 Insert: 16 x 0,3 mm steel 33.401G: Grey	33.307 / 33.307A  Material: PVC, black Grip range: 1 - 2 mm Hardness: SH 75 Insert: 17,5 x 0,3 mm steel 33.307A: On cardboard coil	33.410X / 33.410XG  Material: PVC Black Grip range: 1 - 2 mm Hardness: Shore 75 A Insert: 17,5x0,4mm steel 33.410XG: Grey
33.310X  Material: PVC, black Grip range: 1 - 3 mm Hardness: SH 75 Insert: 26 x 0,47 mm steel	33.422  Material: TPE, flexible, black Grip range: 1 - 2,5 mm Hardness: SH 82 Insert: 25 x 0,48 mm steel	33.308 / 33.308A  Material: PVC, black Grip range: 1 - 4 mm Hardness: SH 75 Insert: 26 x 0,47 mm steel 33.308A: On cardboard coil	33.432  Material: EPDM Grip range: 1 - 3 mm Hardness: SH 65 Insert: 27 mm wire
33.438  Material: EPDM Grip range: 1,5 - 3,5 mm Hardness: SH 65 Insert: 29 x 0,5 mm steel	33.420X  Material: PVC, black Grip range: 1 - 4 mm (3-5) Hardness: SH 75 Insert: 27 x 0,47 mm steel	33.420H  Material: PVC, white Grip range: 1 - 4 mm Hardness: SH 76 Insert: XX	33.419  Material: PVC, black Grip range: 1 - 4 mm Hardness: SH 78 Insert: 31 x 0,5 mm steel
33.411  Material: PVC, grey Grip range: 2,5 - 4 mm Hardness: SH 78 Insert: 29 x 0,48 mm steel	33.418X  Material: PVC, black + bi Grip range: 2 - 4 mm Hardness: SH 75 / 75 Insert: 26 x 0,5 mm steel White lips	33.434  Material: EPDM Grip range: 2 - 4 mm Hardness: SH 65 Insert: 30 mm wire	33.427X  Material: PVC, black + bi Grip range: 1,5 - 4,5 mm Hardness: SH 75 / 75 Insert: 30 x 0,47 mm steel Yellow lips

















33.094X Material: PVC, black + bi Grip range: 1 - 4 mm Hardness: SH 75 / 75 Insert: 30 x 0,47 mm steel Yellow lips	33.419A Material: PVC, black Grip range: 2 - 4 mm Hardness: SH 75 Insert: 30 x 0,5 mm steel	33.1153 Material: PVC, black Grip range: 6 - 8 mm Hardness: SH 78 Insert: 31 x 0,5 mm steel	33.1153A Material: PVC, black Grip range: 6 - 8 mm Hardness: SH 78 Insert: 32 x 0,47 mm steel
33.1153GA Material: PVC, grey Grip range: 6 - 8 mm Hardness: SH 78 Insert: 32 mm steel	33.414 Material: PVC, black + bi Grip range: 4 - 6 mm Hardness: SH 75 / 60 Insert: 30 x 0,48 mm steel	33.415 Material: PVC, black Grip range: 5 - 7 mm Hardness: SH 78 Insert: 29 x 0,48 mm steel	33.435X Material: EPDM Grip range: 5 - 8 mm Hardness: SH 70 Insert: 31 x 0,5 mm steel
33.426XA Material: PVC, black Hardness: SH 78 Grip range: 4,5 - 7 mm Insert: 32 mm Min. order: 1.000 m	33.426A / 33.426GA Material: PVC+bi, black/grey Hardness: SH 78 / 65 Grip range: 4,5 - 7 mm Insert: 32 mm 33.426GA: Grey Min. order: 1.000 m	33.426X Material: PVC, black Grip range: 4,5 - 7 mm Hardness: SH 75 Insert: 30 x 0,8 mm steel	33.426 Material: PVC, black + bi Grip range: 4,5 - 7 mm Hardness: SH 78 / 65 Insert: 29 x 0,48 mm steel
33.433 Material: EPDM Grip range: 4 - 6 mm Hardness: SH 70 Insert: 33 x 0,47 mm steel	33.1154 Material: PVC, black Grip range: 6 - 8 mm Hardness: SH 75 / 75 Insert: 30 x 0,47 mm steel White lips	33.430A Material: PVC Grip range: 8 - 10 mm Hardness: SH 75 / 60 Insert: 35 x 0,48 steel	33.430 Material: PVC, black + bi Grip range: 10 - 12 mm Hardness: SH 75 / 60 Insert: 35 x 0,48 steel

















33.428 / 33.428G  Material: PVC+bi, black/grey Grip range: 10 - 12 mm Hardness: SH 78 Insert: 36 x 0,5 mm steel 33.428G: Grey	33.1157  Material: PVC, black Grip range: 12 - 14 mm Hardness: SH 75	33.1159  Material: PVC, black Grip range: 14 - 16 mm Hardness: SH 75	33.1158A *  Material: PVC, black Grip range: 13 - 15 mm Hardness: SH 70 Insert: 45 x 0,48 mm steel Min. order: 500 m
33.1160  Material: PVC, black Grip range: 17 - 19 mm Hardness: SH 75	33.1161  Material: PVC, black Grip range: 20 - 23 mm Hardness: SH 75	33.1162  Material: PVC, black Grip range: 25 - 27 mm Hardness: SH 75	33.1163  Material: PVC, black Grip range: 28 - 32 mm Hardness: SH 75
33.1155  Material: PVC, black Grip range: 15 - 16 mm Hardness: SH 85 Insert: Steel	33.1156  Material: PVC, black Grip range: 18 - 19 mm Hardness: SH 85 Insert: Steel		

















33.354A  Material: EPDM co-ex Grip range: 1,5 - 2 mm Hardness: SH 70 Density: 0,55 Insert: 17,5 mm steel	33.354  Material: PVC, black+bi / sponge rubber Grip range: 1 - 2 mm Hardness: SH 78 / 57 Density: 0,55 Insert: 16 x 0,3 mm steel	33.468B  Material: EPDM co-ex Grip range: 1 - 2 mm Hardness: SH 70 Density: 0,55 Insert: 22 mm wire	33.354B  Material: EPDM co-ex Grip range: 1,5 - 2,5 mm Hardness: SH 70 Density: 0,55 Insert: 22 mm wire
33.358D  Material: EPDM co-ex Grip range: 1,5 - 2,5 mm Hardness: SH 70 Density: 0,55 Insert: 25 mm wire	33.358A  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,55 Insert: 27 mm wire	33.358E  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,55 Insert: 27 mm wire	33.371  Material: EPDM co-ex Grip range: 1 - 3 Hardness: SH 70 Density: 0,55 Insert: 25 mm wire Tynd blød ballon
33.358X  Material: EPDM co-ex Grip range: 1 - 2,5 mm Hardness: SH 70 Density: 0,55 Insert: 26 x 0,5 mm unbroken	33.021  Material: EPDM co-ex Grip range: 0,8 - 2 mm Hardness: SH 70 Density: 0,55 Insert: 25 mm wire	33.469X  Material: PVC, black +bi / sponge rubber Grip range: 1,5 - 3,5 mm Hardness: SH 75 / 63 Density: 0,6 - 0,85 Insert: 26 x 0,47 mm steel	33.371E EMV - EMC - EMI *  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,55 Insert: Wire Electrically conductive
33.371X  Material: EPDM co-ex Grip range: 1 - 3,5 mm (1-3) Hardness: SH 70 Density: 0,55 Insert: 27 mm wire	33.370NBR  Material: NBR co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,55 Insert: Wire Oil resistant	33.358B  Material: EPDM co-ex Grip range: 1 - 3,0 mm Hardness: SH 70 Density: 0,55 Insert: 27 mm	33.369  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 65 Density: 0,6 Insert: Wire

33.481A  Material: PVC, black Grip range: 1 - 3 mm Hardness: SH 75 Density: 0,55 Insert: 26 mm steel	33.481 *  Material: PVC, black + bi / sponge rubber Grip range: 1 - 4 mm Hardness: SH 57 / 78 Density: 0,55 Insert: Steel Min. order: 250 m	33.353NBR *  Material: NBR co-ex + slip-coat Grip range: 3 - 4 mm Hardness: SH 70 Density: 0,55 Insert: 31 x 0,5 mm Oil resistant Min. order: 3.000 m	33.353  Material: EPDM co-ex Grip range: 3 - 5 mm Hardness: SH 65 Density: 0,6 Insert: 32 mm steel
33.357X  Material: PVC, black / sponge rubber Grip range: 5 - 7 mm Hardness: SH 78 Density: 0,6 Insert: 32 x 0,5 mm	33.359X  Material: EPDM co-ex Grip range: 1,5 - 4 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 25 wire	33.353X  Material: EPDM co-ex Grip range: 4 - 6 mm Hardness: SH 65 Density: 0,6 Insert: 33 mm steel	33.376  Material: EPDM co-ex Grip range: 1 - 3,5 mm Hardness: SH 70 Density: 0,75 Insert: 27 mm steel
33.360NBR *  Material: NBR co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,55 Insert: 27 x 0,75 wire Oil resistant Min. order: 4.000 m	33.360  Material: EPDM co-ex Grip range: 1 - 2,5 mm Hardness: SH 60 Density: 0,6 Insert: 27 x 0,75 mm wire	33.360X  Material: EPDM co-ex Grip range: 1 - 2,5 mm (1-3) Hardness: SH 70 Density: 0,6 Insert: 27 x 0,74 mm wire	33.365X  Material: PVC, black + bi / sponge rubber Grip range: 1 - 4 mm Hardness: SH 75 / 63 Density: 0,6 - 0,85 Insert: 26 x 0,47 mm steel
33.377  Material: EPDM co-ex Grip range: 1 - 3,5 mm Hardness: SH 70 Density: 0,75 Insert: 27 mm wire	33.481B  Material: EPDM co-ex Grip range: 1,5 - 3,5 mm Hardness: SH 70 Density: 0,55 Insert: 27 mm steel	33.362X  Material: EPDM co-ex Grip range: 2 - 3,5 mm (2-4) Hardness: SH 70 Density: 0,60 Insert: 26 x 0,47 mm steel	33.374  Material: EPDM co-ex Grip range: 1,5 - 4 mm Hardness: SH 70 Density: 0,55 Insert: 27 x 0,47 mm steel


33.362D *  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 65 Density: 0,6 Insert: 27 x 0,75 mm wire Min. order: 51 m	33.362K  Material: EPDM co-ex Grip range: 1,5 - 3,0 mm Hardness: SH 75 Density: 0,65 Insert: 26 x 0,47 mm	33.362E *  Material: EPDM co-ex Grip range: 3 - 5 mm Hardness: SH 65 Density: 0,65 Insert: 26 x 0,5 mm steel Min. order: 1.000 m	33.362I *  Material: EPDM co-ex Grip range: 5 - 6 mm Hardness: SH 65 Density: 0,65 Insert: 26 x 0,5 mm steel Min. order: 1.000 m
33.362  Material: EPDM co-ex Grip range: 1 - 3,5 mm Hardness: SH 70 Density: 0,6 Insert: 26 x 0,76 mm wire Discontinued when sold	33.362C *  Material: EPDM co-ex Grip range: 1,5 - 3 mm Hardness: SH 65 Density: 0,65 Insert: 26 x 0,5 mm steel Min. order: 1.500 m	33.025  Material: EPDM co-ex Grip range: 1,5 - 3,5 mm Hardness: SH 70 Density: 0,55 Insert: 27 x 0,47 mm steel	33.367 *  Material: EPDM, solid balloon Grip range: 16 mm Hardness: SH 60 Insert: 52 x 0,76 mm wire Min. order: 3.030 m
33.380  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,55 Insert: 29 mm wire	33.379  Material: EPDM co-ex Grip range: 2,5 - 5 mm Hardness: SH 70 Density: 0,55 Insert: 33 mm wire	33.378  Material: EPDM co-ex Grip range: 1,5 - 5 mm Hardness: SH 70 Density: 0,55 Insert: 33 mm wire	33.375  Material: EPDM co-ex Grip range: 4 - 5 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 27 mm wire
33.367X  Material: PVC/sponge rubber, black Grip range: 15 - 16 mm Hardness: SH 85 Insert: Steel	33.463  Material: PVC, black + bi / sponge rubber Grip range: 4 - 6 mm Hardness: SH 78 / 57 Density: 0,55 Insert: 31 x 0,5 mm steel	33.463A *  Material: EPDM co-ex Grip range: 9 - 10,5 mm Hardness: SHX Density: X Insert: Wire Min. order: 50 m	33.351A  Material: EPDM co-ex Grip range: 1,5 - 3,5 mm Hardness: SH 70 Density: 0,55 Insert: 27 mm wire

33.408A *  Material: EPDM co-ex Grip range: 1 - 1,5 mm Hardness: SH 70 Density: 0,55 Insert: 18 mm wire	33.407A  Material: EPDM co-ex Grip range: 1 - 2,5 mm Hardness: SH 70 Density: 0,55 Insert: 22 x 0,75 mm wire	33.408B  Material: PVC, black + bi Grip range: 1 - 2 mm Hardness: SH 75 / 65 Density: 0,55 Insert: 17,5 mm steel Transparente læber Transparent lips	33.408X  Material: PVC, black + bi / sponge rubber Grip range: 1 - 2 mm Hardness: SH 78 / 57 Density: 0,55 Insert: 16 x 0,3 mm steel
33.9779  Material: EPDM co-ex Grip range: 1,5 - 3 mm (1-3) Hardness: SH 70 Density: 0,65 Insert: 25 x 0,5 mm steel	33.395X *  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,55 Insert: Wire	33.395XA  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,55 Insert: Wire	33.398  Material: NBR co-ex Grip range: 2 mm Hardness: SH 60 Density: 0,55 Insert: 27 x 0,76 mm wire Oil resistant
33.398X  Material: NBR co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,55 Oil resistant Min. order: 2.500 m	33.381  Material: EPDM co-ex Grip range: 1 - 2,5 mm Hardness: SH 70 Density: 0,55 Insert: Wire	33.444A  Material: EPDM co-ex Grip range: 1,5 - 4 mm Hardness: SH 70 Density: 0,55 Insert: Wire	33.372X  Material: PVC, black / sponge rubber Grip range: 1 - 3,5 mm Hardness: SH 75 / 75 Density: 0,6 - 0,85 Insert: 22 x 0,47 mm steel
33.506 *  Material: EPDM co-ex Grip range: 1 - 2,5 mm Hardness: SH 70 Density: 0,6 Insert: 30 x 0,47 mm steel Min. order: 4.000 m	33.480 *  Material: EPDM co-ex Grip range: 1 - 3,5 mm Hardness: SH 70 Density: 0,55 Insert: Steel 33.480-1435: Fixed length: 1.435 mm Min. order: 2.200 m	33.396  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 27 mm wire	33.444X  Material: PVC, black + bi / sponge rubber Grip range: 1 - 3,5 mm Hardness: SH 75 / 75 Density: 0,6 - 0,86 Insert: 26 x 0,47 mm steel Red lips

33.319  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: Wire	33.323  Material: EPDM co-ex Grip range: 1,5 - 3,5 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 27 mm	33.324CR  Material: CR co-ex Grip range: 1 - 3,5 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 29 mm wire Conditional oil resistant	33.450NBR  Material: NBR co-ex Grip range: 4 - 6 mm (3-6) Hardness: SH 70 Density: 0,55 Insert: 34 x 0,5 mm steel Oil resistant
33.457  Material: EPDM co-ex Grip range: 5 - 6 mm Hardness: SH 60 Density: 0,6 Insert: 32 x 0,6 mm steel, Unbroken	33.457ST  Material: EPDM co-ex Grip range: 5 - 6 mm Hardness: SH 60 Density: 0,55 Insert: 31 x 0,76 mm wire	33.449  Material: PVC, black + bi / sponge rubber Grip range: 1 - 4 mm Hardness: SH 78 / 57 Density: 0,55 Insert: 26 x 0,5 mm steel	33.321  Material: EPDM co-ex Grip range: 1 - 3,5 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 27 mm wire
33.457S-5  Material: EPDM co-ex Grip range: 1,5 - 4 (1,5-5 mm) Hardness: SH 70 Density: 0,6 Insert: 32 x 0,47 steel	33.457S-6  Material: EPDM co-ex Grip range: 3 - 6 mm Hardness: SH 70 Density: 0,6 Insert: 32 x 0,47 steel	33.451E  Material: EPDM co-ex Grip range: 2 - 5 mm Hardness: SH 70 Density: 0,6 Insert: 30 mm steel	33.024  Material: EPDM co-ex Grip range: 2 - 4 mm (2-5) Hardness: SH 70 Density: 0,55 Insert: 33 mm wire
33.454X  Material: EPDM co-ex Grip range: 2 mm Hardness: SH 70 Density: 0,55 Insert: 27 x 0,76 mm wire	33.335  Material: EPDM co-ex Grip range: 1,5 - 3,5 mm Hardness: SH 70 Density: 0,55-0,85 Insert: 27 mm wire	33.457S-4 *  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,6 Insert: Steel Min. order: 3.000 m	33.020  Material: EPDM co-ex Grip range: 1,5 - 3 mm Hardness: SH 70 Density: 0,55 Insert: 27 x 0,47 mm steel


33.020NBR *  Material: NBR co-ex Grip range: 1,5 - 3 mm Oil resistant Min. order: 2.000 m	33.332X  Material: EPDM co-ex Grip range: 5 - 6 mm Hardness: SH 70 Density: 0,6 Insert: 33 x 0,5 steel	33.470  Material: EPDM co-ex Grip range: 5 - 8 mm Hardness: SH 70 Density: 0,6 Insert: 36 x 0,5 mm steel	33.339X  Material: PVC, black+bi / sponge rubber Grip range: 2,5 - 4 mm Hardness: SH 78 / 65 Insert: Steel
33.12116 *  Material: EPDM co-ex Grip range: 1 - 4 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 29 mm wire Min. order: 3.000 m	33.022  Material: EPDM co-ex Grip range: 1,5 - 3 mm (1,5 - 4) Hardness: SH 70 Density: 0,6 Insert: 33 mm wire	33.332B *  Material: EPDM co-ex Grip range: 3 - 6 mm Hardness: SH 70 Density: 0,55 Insert: 32 x 0,47 mm Steel Min. order: 1.000 m	33.453X  Material: PVC, black + sponge rubber Grip range: 1 - 3,5 mm Hardness: SH 75 / 75 Density: 0,6 - 0,85 Insert: 26 x 0,47 mm steel
33.019  Material: EPDM co-ex Grip range: 1 - 4 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: Steel	33.455  Material: EPDM co-ex Grip range: 4 - 6 mm Hardness: SH 70 Density: 0,6 Insert: Steel, unbroken	33.452X  Material: PVC, black + bi / sponge rubber Grip range: 2 - 4 mm Hardness: SH 78 / 65 Density: 0,65 - 0,75 Insert: 29 x 0,48 mm	33.340  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Insert: 29 x 0,74 mm wire
33.326  Material: EPDM co-ex Grip range: 1,5 - 4 mm Hardness: SH 70 Density: 0,55 - 0,85 Insert: 33 mm wire	33.464  Material: EPDM co-ex Grip range: 1,5 - 3,5 mm Hardness: SH 70 Density: 0,6 Insert: 31 x 0,75 mm wire	33.466  Material: EPDM co-ex Hardness: SH 70 + - 5 Grip range: 1,5 - 3 mm Density: 1,3 + - 0,03 Insert: 30 x 0,74 mm wire	33.331  Material: PVC, black + sponge rubber Grip range: 6 - 8 mm Hardness: SH 75 / 75 Density: 0,6 - 0,85 Insert: 30 x 0,47 mm steel Hvide læber White lips

33.452BA



































Material: PVC, black + bi /
spongerubber
Grip range: 10 - 12mm
Hardness: SH 75/60
Density: 0,65 - 0,75
Insert: 35 x 0,48 steel

33.478



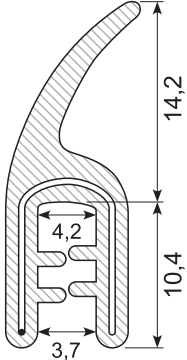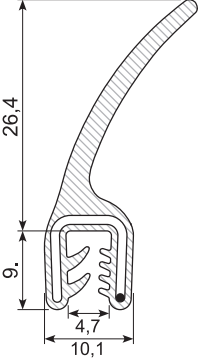Material: EPDM co-ex
Grip range: 16 mm
Hardness: SH 60
Density: 0,6
Insert: 52 x 0,76 mm wire
Min. order: 3.000 m

33.473  Material: EPDM solid lip Grip range: 3 - 4 mm Hardness: SH 70 Density: 0,55 Insert: 26 x 0,76 mm wire	33.458A  Material: Epdm solid lip Grip range: 1 - 3 mm Hardness: SH 70 Insert: Wire	33.465C  Material: EPDM solid lip Grip range: 2 - 4 mm Hardness: SH 70 Insert: 27 x 0,76 wire	33.465A  Material: EPDM, solid lip Grip range: 1 - 3 mm Hardness: SH 70 Insert: 27 x 0,74 wire
33.479  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,6 Insert: Steel	33.465B *  Material: EPDM, solid lip Grip range: 1 - 3 mm Hardness: SH 70 Insert: 27 x 0,5 mm steel Unbroken Min. order: 3.000 m	33.459P  Material: PVC, solid lip Grip range: 1 - 2,5 mm Hardness: SH 57 Insert: 24 x 0,5 mm steel, Unbroken	33.459A  Material: EPDM solid lip Grip range: 1 - 2,5 mm Hardness: SH 70 Insert: 27 x 0,74 wire
33.459XB  Material: CR solid lip Grip range: 1 - 2,5 mm Hardness: SH 70 Insert: 26 x 0,74 wire Conditional oil resistant Min. order: 3.000 m	33.459B  Material: EPDM solid lip Grip range: 1,5 - 3 mm Hardness: SH 70 Insert: Wire	33.475  Material: PVC + bi / sponge rubber Grip range: 2 - 4 mm Hardness: SH 78 / 57 Density: 0,55 Insert: Steel	33.483  Material: Epdm solid lip Grip range: 1 - 2,5 mm Hardness: SH 70 Insert: 30 x 0,47 mm steel
33.482  Material: Epdm solid lip Grip range: 2 - 4,5 mm Hardness: SH 70 Insert: 30 x 0,47 mm steel	33.460-6K *  Material: PVC / sponge rubber Grip range: 4 - 6 mm Hardness: SH 70 Density: 0,6 Insert: 31 x 0,5 mm steel, Unbroken Min. order: 2-4.000 m	33.460-2C  Material: EPDM co-ex Grip range: 1 - 2,5 mm Hardness: SH 70 Density: 0,6 Insert: 31 x 0,5 mm steel, No gluing, Unbroken	33.460-4C  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,6 Insert: 31 x 0,5 mm steel, No gluing, unbroken





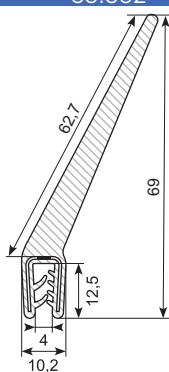












33.460-6A  Material: PVC+bi / sponge rubber Grip range: 4 - 6 mm Hardness: SH 78/57 Density: 0,6 Insert: 31 x 0,5 mm steel	33.460-6C  Material: EPDM co-ex Grip range: 4 - 6 mm Hardness: SH 70 Density: 0,6 Insert: 31 x 0,5 mm steel No gluing, unbroken Min. order: 2-3.000 m	33.471  Material: EPDM, solid lip Grip range: 3 - 4 mm Hardness: SH 60 solid lip Insert: 29 x 0,76 mm wire	33.382  Material: Epdm solid lip Grip range: 1 - 3,5 mm Hardness: SH 70 Insert: Steel
33.472  Material: EPDM, solid lip Grip range: 2 - 4 mm Hardness: SH 70 Insert: 29 x 0,5 mm Unbroken	33.460-6XL  Material: PVC+bi / sponge rubber Grip range: 3 - 6 mm Hardness: SH 75 / 57 Density: 0,6 Insert: Steel	33.443X  Material: EPDM co-ex Grip range: 1 - 2 mm Hardness: SH 60 Density: 0,6 Insert: Wire	33.383  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,6 Insert: 30 x 0,5 steel
33.474  Material: EPDM co-ex Grip range: 2 - 5 mm Hardness: SH 70 Density: 0,6 - 0,85 Insert: 27 mm steel	33.439A  Material: PVC+bi / sponge rubber Grip range: 1 - 4 mm Hardness: SH 78 / 57 Density: 0,6 Insert: 26 x 0,5 mm steel Yellow lips	33.026  Material: EPDM co-ex Grip range: 1,5 - 2 mm (1 - 3,5) Hardness: SH 70 Density: 0,55 Insert: 26 x 0,76 mm wire	33.026XA  Material: EPDM co-ex Grip range: 2 - 3 mm Hardness: SH 70 Density: 0,55 Insert: 26 x 0,76 mm wire
33.026X  Material: EPDM co-ex Grip range: 3 - 4 mm Hardness: SH 70 Density: 0,55 Insert: 26 x 0,76 mm wire	33.436  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 70 Density: 0,6 Insert: 33 mm wire	33.442  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 70 Density: 0,65 Insert: 29 mm steel	33.386 *  Material: EPDM co-ex Grip range: 4 - 6 mm Hardness: SH 70 Density: 0,6 Steel: 31x0,5 Min. order: 500 m

DESIGN

DIN EGEN KANTLISTE

Design din egen kantliste PVC

























vælg krop og dernæst ballon/læbe

 A1 00 8-1,5	 A1 010 1,0-2,0 mm	 A1 013 1,0-2,0 mm	 A1 023/2 1,0-2,5 mm A1 023/4 2,0-4,0 mm
 A2 051 1,0-3,0 mm	 A3007 1,0-4,0 mm	 A1 032* 1,0-2,5 mm min. 4000	 A1 015 1,0-4,0
 A1 044 2,0-5,0 mm	 A3634 2,0-5,0 mm Grå	 A1 021 2,0-5,0 mm	 A1 019/8 6,0-8,0 mm A1 019/10 8,0-10,0
 A2 078 10,0-12,0 mm	 A1 037* 1,0-4,0 mm min. 6000	 A1 024/2* 1,0-2,5 mm A1 024/4 2,0-4,0 mm A1 024/6 4,0-6,0 mm	 A1 018 1,0-4,0 mm
 A1 030 4,0-6,0 mm min. 6000			




















Minimum typisk 500 mtr, hvis ikke andet er nævnt.













Standard farve sort, hvis ikke andet er nævnt, andre farver på krop muligt
















Ballon, svampegummi











 E2 558	 E2 566	 E2 575	 E2 556
 E2 605	 E2 541	 E2 594*	 E2 548
 E2 726*	 E2 570	 E2 546	 E2 701
 E2 632*	 E2 563	 E2 587*	 E2 562
 E2 611*	 E2 593	 E2 577	 E2 581
 E2 573	 E2 576	 E2 547*	 E2 683



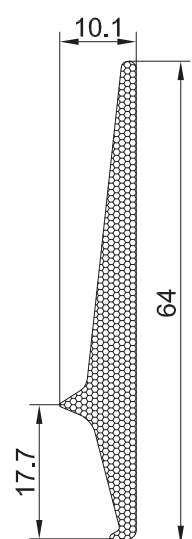













Ballon/Læbe, svampegummi

















 E2 595*	 E2 555	 E2 553	 E2 568
 E2 559*	 E2 647	 E2 657*	 E2 584*
 E2 582	 E2 598*	 E2 557	 E2 572
 E2 640	 E2 554	 E2 583	 E2 659*
 E2 672*	 E2 580	 E2 707	

















33.410SS304  Material: PVC, black Grip range: 0.8 - 2.0 mm Hardness: SH 70 Insert: 17.5 x 0,4 mm Stainless steel SS 304	33.410SS316  Material: PVC, black Grip range: 0.8 - 2 mm Hardness: SH 70 Insert: 17.5 x 0,4 mm Stainless steel SS 316, Acid-proof	33.310SS304  Material: PVC, black Grip range: 1.5 - 2.5 mm (1-3) Hardness: SH 70 Insert: 25.8 x 0,4 mm Stainless steel SS 304	33.310SS316  Material: PVC, black Grip range: 1.5 - 2.5 mm (1-3) Hardness: SH 70 Insert: 25.8 x 0,4 mm Stainless steel SS 316, Acid-proof
33.308SS304  Material: PVC, black Grip range: 1.5 - 3 mm Hardness: SH 70 Insert: 27 x 0,4 mm Stainless steel SS 304	33.308SS316  Material: PVC, black Grip range: 1.5 - 3 mm Hardness: SH 70 Insert: 27 x 0,4 mm Stainless steel SS 316, Acid-proof	33.418SS304  Material: PVC, black Grip range: 1.5 - 3 mm (2-4) Hardness: SH 75/60 Insert: 27 x 0,4 mm Stainless steel SS 304	33.418SS316  Material: PVC, black Grip range: 1.5 - 3 mm (2-4) Hardness: SH 75/60 Insert: 27 x 0,4 mm Stainless steel SS 316, Acid-proof
33.414SS304  Material: PVC, black + bi Grip range: 4 - 6 mm Hardness: SH 75 / 60 Insert: 30 x 0,40 mm steel Stainless steel 304	33.360R  Material: PVC, black / sponge rubber Grip range: 1 - 2,5 mm Hardness: SH 77 Density: 0,65 - 0,75 Insert: 26 x 0,5 mm Stainless steel 304	33.452R  Material: PVC, black +bi / sponge rubber Grip range: 2 - 4 mm Hardness: SH 78 / 65 Density: 0,65 - 0,75 Insert: 29 x 0,48 mm Stainless steel 304	33.462R  Material: PVC / sponge rubber Grip range: 1 - 2,5 mm Hardness: SH 78 Density: 0,65 - 0,75 Insert: 25 x 0,48 mm Stainless steel 304



33.409F  Material: EPDM Grip range: 1 - 2 mm Hardness: SH 60 Insert: Steel Flame retardant EN 45545	33.420FX  Material: EPDM Grip range: 1 - 3 mm Hardness: SH 60 Insert: 26 x 0,5 mm steel Flame retardant EN 45545	33.376F  Material: EPDM Grip range: 8-10mm Hardness: SH 60 Insert: 31x0,5 mm steel Flame retardant EN 45545	
33.468F  Material: EPDM co-ex Grip range: 1 - 2 mm Hardness: SH 60 Density: 0,8 Insert: 22 x 0,75 mm wire Flame retardant EN 45545	33.371FX  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 60 Density: 0,8 Insert: 26 x 0,75 mm wire Flame retardant EN 45545	33.358F  Material: PDM co-ex Grip range: 1-4mm Hardness: SH 60 Density: 0,60 Insert: 26 x 0,45 mm steel Flame retardant EN 45545-2	33.362FX  Material: EPDM co-ex Grip range: 1 - 3,5 mm Hardness: SH 60 Density: 0,8 Insert: 26 x 0,75 mm wire Flame retardant EN 45545
33.677F  Material: EPDM co-ex Grip range: 2,0-3,0mm Hardness: SH 60 Density: 0,60 Insert: 31 x 0,50 mm steel Flame retardant EN 45545-2	33.355F  Material: EPDM co-ex Grip range: 2-4mm Hardness: SH 60 Density: 0,60 Insert: 31 x 0,50 mm steel Flame retardant EN 45545-2	33.403F  Material: EPDM co-ex Grip range: 1 - 2 mm Hardness: SH 60 Density: 0,8 Insert: 22 x 0,75 mm wire Flame retardant EN 45545	33.395F  Material: EPDM co-ex Grip range: 1 - 3 mm Hardness: SH 60 Density: 0,8 Insert: 26 x 0,75 mm wire Flame retardant EN 45545
33.678F  Material: EPDM co-ex Grip range: 1-3mm Hardness: SH 60 Density: 0,60 Insert: 26 x 0,75 mm wire Flame retardant EN 45545	33.338F  Material: EPDM co-ex Grip range: 1,5 - 3 mm Hardness: SH 65 Density: 0,60 Insert: 30 x 0,75 mm wire Flame retardant EN 45545	33.679F  Material: EPDM co-ex Grip range: 2-3,5mm Hardness: SH 60 Density: 0,60 Insert: 30 x 0,60 mm steel Flame retardant EN 45545-2	33.681F  Material: PDM co-ex Grip range: 1-4mm Hardness: SH 60 Density: 0,60 Insert: 26 x 0,45 mm steel Flame retardant EN 45545-2

33.680F  Material: EPDM co-ex Grip range: 1-4mm Hardness: SH 60 Density: 0,60 Insert: 29 x 0,50 mm steel Flame retardant EN 45545	33.682F  Material: EPDM co-ex Grip range: 3-4,5mm Hardness: SH 60 Density: 0,60 Insert: 34 x 0,50 mm steel Flame retardant EN 45545-2	33.458F  Material: EPDM solid lip Grip range: 1-2,5mm Hardness: SH 60 Insert: 26 x 0,76 mm wire Flame retardant EN 45545-2	33.683F  Material: EPDM solid lip Grip range: 1-2,5mm Hardness: SH 60 Insert: 26 x 0,75 mm wire Flame retardant EN 45545-2
33.383F  Material: EPDM co-ex Grip range: 1,25-2,0mm Hardness: SH 60 Density: 0,60 Insert: 29 x 0,50 mm steel Flame retardant EN 45545-2			
33.310SS-316EPDM  Material: EPDM, black Grip range: 1 - 2,5 mm Hardness: SH 80 Insert: 26 x 0,5 mm Flame retardant UL94V0 + Din 5510-2 Min. order: 20.000 m			
33.360F  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 65 Density: 0,6 Insert: 27 x 0,76 mm wire Flame retardant NNF 16101 (Certificate valid only 2016) Min. order: 3.000 m	33.362F  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 65 Density: 0,6 Insert: 29 x 0,5 mm steel Flame retardant NNF 16101 (Certificate valid only 2016) Min. order: 1.000 m	33.456F  Material: EPDM co-ex Grip range: 2 - 4 mm Hardness: SH 65 Density: 0,6 Insert: 31 x 0,75 mm wire Flame retardant NNF 16101 (Certificate valid only 2016) Min. order: 3.000 m	33.460-2F  Material: EPDM co-ex Grip range: 1 - 2,5 mm Hardness: SH 65 Density: 0,6 Insert: 31 x 0,5 mm steel Flame retardant ref. NNF 16101 (Certificate valid only 2016) Min. order: 3.000 m

33.311  Material: Silicone, black, FDA conform Grip range: 1 - 2 mm Hardness: SH 60 Insert: Wire 18 x 0,76 mm Heat resistant 200° C	33.510  Material: Silicone, black, FDA conform Grip range: 1 - 2 mm Hardness: SH 65 Insert: Wire 26 x 0,76 mm Heat resistant 200° C Min. order: 500 m	33.312  Material: Silicone, black, FDA conform Grip range: 3 - 4 mm Hardness: SH 60 Insert: Wire Heat resistant 200° C	33.429  Material: Silicone, black, FDA conform Grip range: 2,5 - 5 mm (5 - 7) Hardness: SH 60 Insert: Wire 39 x 0,76 mm Heat resistant 200° C
33.534  Material: Silicone, black, FDA conform Grip range: 5 - 8 mm Hardness: SH 70 + - 5 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.537  Material: Silicone, black, FDA conform Grip range: 2 - 4 mm Hardness: SH 60 + - 5 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.531  Material: Silicone, black, FDA conform Grip range: 2,5 - 5 mm Hardness: SH 70 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.532  Material: Silicone, black, FDA conform Grip range: 4 - 6 mm Hardness: SH 65 Insert: Wire Heat resistant 200° C Min. order: 500 m
33.538  Material: Silicone, black, FDA conform Grip range: 3 - 4 mm Hardness: SH 60 + - 5 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.536  Material: Silicone, black, FDA conform Grip range: 1,5 - 2,5 mm Hardness: SH 60 + - 5 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.541  Material: Silicone, black, FDA conform Grip range: 2 - 3,5 mm Hardness: SH 68 + - 5 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.540  Material: Silicone, black, FDA conform Grip range: 1 - 3 mm Hardness: SH 60 + - 5 Insert: Wire Heat resistant 200° C Min. order: 500 m
33.527  Material: Silicone, black, FDA conform Grip range: 1 - 2,5 mm Hardness: SH 65 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.539  Material: Silicone, black, FDA conform Grip range: 3,5 - 4,5 mm Hardness: SH 60 + - 5 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.529  Material: Silicone, black, FDA conform Grip range: 1 - 2 mm Hardness: SH 80 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.530  Material: Silicone, black, FDA conform Grip range: 4,5 - 6 mm Hardness: SH 70 Insert: Wire Heat resistant 200° C

33.528 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 2 mm Hardness: SH 50 Insert: Wire Heat resistant 200° C Min. order: 350 m	33.526 *  Material: Silicone, black, FDA conform Grip range: 1 - 2 mm Hardness: SH 62 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.535 *  Material: Silicone, black, FDA conform Grip range: 2 - 3 mm Hardness: SH 70 + - 5 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.552 *  Material: Silicone, black, FDA conform Grip range: 1 - 2,5 mm Hardness: SH 50 + - 5 Insert: Wire Heat resistant 200° C Min. order: 500 m
33.555 *  Material: Silicone, black, FDA conform Grip range: 2 - 2,5 mm Hardness: SH 55 + - 5 Heat resistant 200° C Min. order: 500 m	33.554 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 2,5 Hardness: SH 65 + - 5 Heat resistant 200° C Min. order: 500 m	33.513 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 3,5 mm Hardness: SH 50 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.512 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 3,5 mm Hardness: SH 60 Insert: Wire Heat resistant 200° C
33.511  Material: Silicone, black, FDA conform Grip range: 1,5 - 3,5 mm Hardness: SH 50 Insert: Wire Heat resistant 200° C	33.556 *  Material: Silicone, black, FDA conform Grip range: 1 - 1,5 mm Hardness: SH 65 + - 5 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.431A  Material: Silicone, grey RAL 7035, FDA conform Grip range: 2 - 4 mm Hardness: SH 60/60, solid balloon Insert: Wire Heat resistant 200° C	33.550 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 2,5 Hardness: SH 50 + 5 Insert: Wire Heat resistant 200° C Min. order: 500 m
33.553 *  Material: Silicone, black, FDA conform Grip range: 2 - 3 mm Hardness: SH 60 + - 5 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.514 *  Material: Silicone, black, FDA conform Grip range: 2 - 3 mm Hardness: SH 75 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.533 *  Material: Silicone, black, FDA conform Grip range: 1,5 - 3 mm Hardness: SH 40 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.515 *  Material: Silicone, black, FDA conform Grip range: 1 - 2 mm Hardness: SH 75 Insert: Wire Heat resistant 200° C Min. order: 500 m

33.548 *  Material: Silicone, black, FDA conform Grip range: 2 - 3 mm Hardness: SH 60 +- 5 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.551 *  Material: Silicone, black, FDA conform Grip range: 1.5 - 2.5 mm Hardness: SH 70 +- 5 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.516 *  Material: Silicone, black, FDA conform Grip range: 2 - 3 mm Hardness: SH 75 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.518 *  Material: Silicone, white, FDA conform Grip range: 2 - 3 mm Hardness: SH 60 Insert: Wire Heat resistant 200° C Min. order: 500 m
33.517 *  Material: Silicone, black, FDA conform Grip range: 1.5 - 2 mm Hardness: SH 50 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.519  Material: Silicone, black, FDA conform Grip range: 2 - 2.5 mm Hardness: SH 45 Insert: Wire Heat resistant 200° C	33.542 *  Material: Silicone, black, FDA conform Grip range: 1 Hardness: SH 65 +- 5 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.544 *  Material: Silicone, black, FDA conform Grip range: 1 - 3 mm Hardness: SH 65 +- 5 Insert: Wire Heat resistant 200° C Min. order: 500 m
33.547 *  Material: Silicone, black, FDA conform Grip range: 2 - 3.5 mm Hardness: SH 60 +- 5 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.546 *  Material: Silicone, black, FDA conform Grip range: 1 - 3 Hardness: SH 60 +- 5 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.520 *  Material: Silicone co-ex, black and redbrown, FDA conform Grip range: 3 - 4 mm Hardness: SH 60 Density: 0,4 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.543 *  Material: Silicone, black, FDA conform Grip range: 2 - 3.5 mm Hardness: SH 75 +- 5 Insert: Wire Heat resistant 200° C Min. order: 500 m
33.524 *  Material: Silicone, black, FDA conform Grip range: 3 - 4.5 mm Hardness: SH 55 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.521  Material: Silicone, black, FDA conform Grip range: 3 - 4.5 mm Hardness: SH 50 Insert: Wire Heat resistant 200° C	33.523 *  Material: Silicone, black, FDA conform Grip range: 1.5 - 2 mm Hardness: SH 60 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.545 *  Material: Silicone, black, FDA conform Grip range: 1.5 - 3 mm Hardness: SH 60 +- 5 Insert: Wire Heat resistant 200° C Min. order: 500 m

33.525  Material: Silicone, black, FDA conform Grip range: 3 - 4 mm Hardness: SH 50 Insert: Wire Heat resistant 200° C Min. order: 500 m	33.848  Material: Silicone, black, FDA conform Grip range: 2 - 4 mm Hardness: SH 60 Insert: Wire Heat resistant 200° C Min. order: 500 m		
---	---	--	--

Alle silikonekantlister kan laves med rustfri stålindlæg ved min. ordre 500 m
All silicone edge trims can be done with stainless insert at min. order. 500 m

Syrefast SS316









ved køb af minimum
10.000 m.













Ny serie med rustfri 304 indlæg














FDA 177.2600 / AE1935-2004 / BgRVXV








(produkter med svamp er ikke FDA-godkendt).

Andre RAL-farver er mulige på massivprofiler.

33.560  Material: Silicone, black Grip range: 2 - 2.5 mm (2-3) Hardness: SH 60 Insert: Wire Stainless steel: SS 304 Min. order: 300 m	33.561  Material: Silicone, black Grip range: 3 - 4 mm (3-5) Hardness: SH 60 Insert: Wire Stainless steel: SS 304 Min. order: 300 m	33.562  Material: Silicone, black Grip range: 4 - 5 mm (4-6) Hardness: SH 60 Insert: Wire Stainless steel: SS 304 Min. order: 250 m	33.563  Material: Silicone, solid balloon, black Grip range: 1 - 3 mm (1-3.5) Hardness: SH 60 Insert: Wire Stainless steel: SS 304 Min. order: 275 m
33.564  Material: Silicone, solid balloon, black Grip range: 1 - 3.5 mm Hardness: SH 60 Insert: Wire Stainless steel: SS 304 Min. order: 160 m	33.565  Material: Silicone co-ex, white/off-white Grip range: 1 - 3.5 mm Hardness: SH 60 Density: 0.60 Insert: Wire Stainless steel: SS 304 Min. order: 150 m	33.566  Material: Silicone, solid balloon, black Grip range: 1 - 3.5 mm Hardness: SH 60 Insert: Wire Stainless steel: SS 304 Min. order: 150 m	33.567  Material: Silicone, solid balloon, black Grip range: 3 - 4 mm (3-5) Hardness: SH 60 Insert: Wire Stainless steel: SS 304 Min. order: 160 m

33.568 *  Material: Silicone co-ex, white/off-white Grip range: 1 – 3.5 mm Hardness: SH60 Density: 0.60 Insert: Wire Stainless steel SS 304 Min. order: 100 m	33.569 *  Material: Silicone, solid balloon, black Grip range: 1.5 – 3.5 mm Hardness: SH 60 Insert: Wire 25 x 0.76 Stainless steel SS 304 Min. order: 100 m	33.570 *  Material: Silicone, solid balloon, black Grip range: 1 – 3.5 mm Hardness: SH60 Insert: Wire Stainless steel SS 304 Min. order: 120 m	33.571 *  Material: Silicone co-ex, white/off-white Grip range: 6 – 7 mm (6–8) Hardness: SH60 Density: 0.60 Insert: Wire Stainless steel SS 304 Min. order: 100 m
33.572 *  Material: Silicone, solid balloon, black Grip range: 1 – 3 mm (1–3.5) Hardness: SH60 Insert: Wire Stainless steel SS 304 Min. order: 160 m	33.573 *  Material: Silicone, solid balloon, black Grip range: 3 – 4 mm Insert: Wire Stainless steel SS 304 Min. order: 120 m	33.574 *  Material: Silicone, solid balloon, black Grip range: 1 – 3.5 mm Hardness: SH 60 Insert: Wire Stainless steel SS 304 Min. order: 150 m	33.575 *  Material: Silicone, solid balloon, black Grip range: 1 – 3 mm (1–4) Hardness: SH 60 Insert: Wire Stainless steel SS 304 Min. order: 120 m
33.576 *  Material: Silicone, solid balloon, black Grip range: 3 – 4 mm Hardness: SH 60 Insert: Wire Stainless steel SS 304 Min. order: 100 m	33.577 *  Material: Silicone, solid balloon, black Grip range: 3 – 4 mm (3–5) Hardness: SH 60 Insert: Wire Stainless steel SS 304 Min. order: 100 m	33.578 *  Material: Silicone, solid lip, black Grip range: 3–4mm Hardness: SH 60 Insert: Wire Stainless steel SS 304 Min. order: 250 m	33.579 *  Material: Silicone, solid lip, black Grip range: 2 – 3 mm (2–4) Hardness: SH 60 Insert: Wire Stainless steel SS 304 Min. order: 300 m

33.409POM* (33.409POMX)  Material: PVC + bi Grip range: 1 - 2,5 mm (0,5 - 2 mm) Hardness: SH 75 / 65 Insert: POM plastic <i>No rust, easy cutting</i>	33.410POMX  Material: PVC + bi Grip range: 0,8 - 1,5 mm Hardness: SH 75 / 65 Insert: POM plastic <i>No rust, easy cutting</i> Udgår: spørg på special pris	33.308POM  Material: PVC + bi Grip range: 1 - 3,5 mm Hardness: SH 75 / 65 Insert: POM plastic <i>No rust, easy cutting</i>	33.308POMG* (33.308POMXG)  Material: PVC + bi grey Grip range: 1 - 3,5 mm (2 - 4,5 mm) Hardness: SH 75 / 65 Insert: POM plastic <i>No rust, easy cutting</i>
33.200POM* (33.200POMX)  Material: PVC + bi Grip range: 2 - 5 mm (1 - 4 mm) Hardness: SH 75 / 65 Insert: POM plastic <i>No rust, easy cutting</i>	33.201POM  Material: PVC + bi Grip range: 2 - 4 mm Hardness: SH 75 / 65 Insert: POM plastic <i>No rust, easy cutting</i>	33.203POM  Material: PVC + bi Grip range: 6 - 8 mm Hardness: SH 75 / 65 Insert: POM plastic <i>No rust, easy cutting</i>	33.210POM  Material: TPE co-ex Grip range: 1,5 - 2,5 mm (1 - 2 mm) Hardness: SH 75 Density: 0,65 Insert: POM plastic <i>No rust, easy cutting</i> Min. order: 1.000 m
33.211POM  Material: TPE co-ex Grip range: 1,5 - 3 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic <i>No rust, easy cutting</i>	33.212POM  Material: TPE co-ex Grip range: 2 - 4 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic <i>No rust, easy cutting</i>		
33.214POM  Material: TPE co-ex Grip range: 1,5 - 3 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic <i>No rust, easy cutting</i>	33.213POMX2  Material: TPE co-ex Grip range: 1 - 2,5 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic <i>No rust, easy cutting</i>	33.215POM  Material: TPE co-ex Grip range: 1 - 2 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic <i>No rust, easy cutting</i>	

33.216POM	33.217POM	33.218POM	33.220POM
 Material: TPE co-ex Grip range: 1,5 - 3 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic No rust, easy cutting	 Material: TPE co-ex Grip range: 1,5 - 4 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic No rust, easy cutting Min. order: 2.000 m	 Material: TPE co-ex Grip range: 1,5 - 4 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic No rust, easy cutting Min. order: 2.000 m	 Material: TPE Grip range: 1,5 - 2,5 mm Hardness: SH 75 Density: 0,65 Insert: POM plastic No rust, easy cutting
33.424	33.424TPEX (33.424TPE)	33.417TPEX (33.417TPE)	
 Material: TPE + bi Grip range: 0,8 - 1,5 mm Hardness: SH 87 / 65 - 70 Insert: None Alternative: 33.424TPEX	 Material: TPE + bi Grip range: 1 - 2 mm (0,5 - 1,5 mm) Hardness: SH 90 / 50 Insert: None	 Material: TPE + bi Grip range: 1 - 4 mm (0,5 - 2 mm) Hardness: SH 90 / 50 Insert: None	

* Skaffevare Special order item

Energioptimering

BIBUS SINDBY A/S iværksatte i september 2022 en proces, hvor vi gennemgik vores el- og gasforbrug.

Med en ny investering i belysning samt en simpel adfærdsændring, lykkedes vi med at reducere vores elforbrug med over 40%.

Vi offentliggør vores forbrug internt en gang i måneden for konstant at holde hinanden op på bedre forbrugsvaner. På vores hjemmeside kan du se hvordan vores energiforbrug har udviklet sig.

Vil du høre mere om vores tiltag, så er du altid velkommen til at kontakte os.


In September 2022, BIBUS SINDBY A/S

initiated a process to review our electricity and gas consumption. With investment in new lighting and a simple behavioural change we managed to reduce our electricity consumption by over 40%.

We publish our consumption internally once a month to constantly keep each other to better consumption habits. On our website you can see how our energy consumption has evolved.

If you want to know more about our initiatives, please feel free to contact us.

Gummisnor Rubber cord



EPDM, sort *black* Shore A 65 – 70

Varenr. Item no.	Ø
30.101 *	1 mm
30.101.25 *	1,25 mm
30.101.5	1,5 mm
30.102	2 mm
30.102E *	2 mm Single cord
30.103E	3 mm
30.103EX *	3 mm
30.104E *	4 mm
30.104.5E *	4,5 mm
30.105E	5 mm
30.106E	6 mm
30.107E	7 mm
30.108E	8 mm
30.109E	9 mm
30.110E	10 mm
30.112E *	12 mm
30.113E	13 mm
30.114E *	14 mm
30.115E *	15 mm
30.116E *	16 mm
30.117E	17 mm
30.118E	18 mm
30.119E	19 mm
30.120E	20 mm
30.121E *	21 mm
30.122E	22 mm
30.124E	24 mm
30.125E *	25 mm
30.135E *	35 mm (SH 75)

CR, sort *black* Shore A 60

Varenr. Item no.	Ø
30.103CR *	3 mm
30.103.5CR *	3,5 mm
30.104CR	4 mm
30.104.5CR *	4,5 mm
30.105CR *	5 mm
30.105.3CR *	5,3 mm
30.105.7CR *	5,7 mm
30.106CR *	6 mm
30.106.5CR *	6,5 mm
30.107CR *	7 mm
30.107.5CR *	7,5 mm
30.108CR *	8 mm
30.108.4CR *	8,4 mm
30.109CR *	9 mm
30.109.5CR *	9,5 mm
30.110CR *	10 mm
30.111CR *	11 mm
30.112CR *	12 mm
30.113CR *	13 mm
30.114CR *	14 mm
30.115CR *	15 mm
30.116CR *	16 mm
30.118CR	18 mm
30.120CR *	20 mm
30.122CR *	22 mm
30.125CR *	25 mm
30.130CR *	30 mm
30.132CR *	32 mm
30.140CR *	40 mm
30.150CR *	50 mm

NBR, sort *black* Shore A 65


Varenr. Item no.	Ø
30.102NBR *	2 mm
30.103NBR	3 mm
30.103.5NBR *	3,5 mm
30.104NBR *	4 mm
30.104.5NBR *	4,5 mm
30.105NBR *	5 mm
30.105.3NBR *	5,3 mm
30.105.7NBR *	5,7 mm
30.106NBR *	6 mm
30.106.5NBR *	6,5 mm
30.107NBR *	7 mm
30.107.5NBR *	7,5 mm
30.108NBR *	8 mm
30.108.4NBR *	8,4 mm
30.109NBR *	9 mm
30.109.5NBR *	9,5 mm
30.110NBR *	10 mm
30.111NBR *	11 mm
30.112NBR *	12 mm
30.113NBR *	13 mm
30.114NBR *	14 mm
30.116NBR *	16 mm
30.118NBR *	18 mm
30.120NBR *	20 mm
30.122NBR *	22 mm
30.125NBR *	25 mm
30.130NBR *	30 mm
30.132NBR *	32 mm
30.135NBR *	35 mm
30.140NBR *	40 mm


Silicone, gennemsigtig translucent Shore A 60

Varenr. Item no.	Ø
30.103SIH *	3 mm
30.104SIH *	4 mm
30.105SIH	5 mm
30.106SIH	6 mm
30.108SIH *	8 mm
30.108SIHX *	8 mm

Elastiksnor Elastic cord

Varenr. Item no.	Ø
50.260-4	4 mm
50.260-5	5 mm
50.260-6	6 mm
50.260-8	8 mm
50.260-10	10 mm
50.260-10T Trampoline cord, black	10 mm

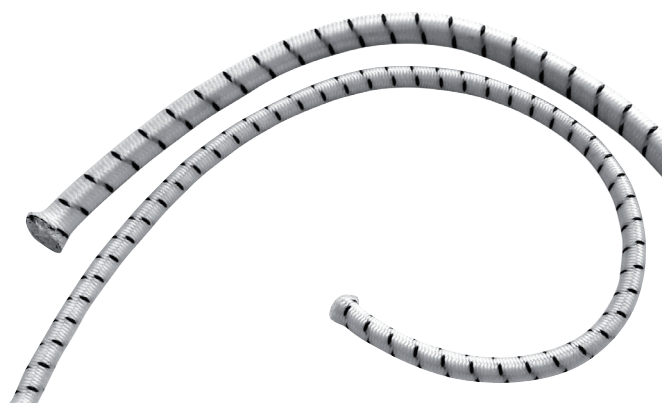

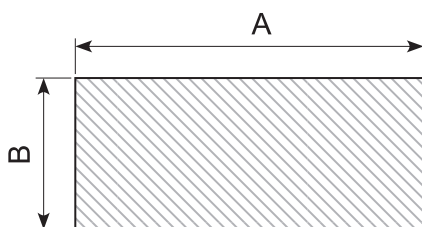

Flere størrelser kan skaffes.
På vores hjemmeside finder du
den komplette liste af
firkant/retangulærprofiler.














More sizes are available. On our
website you will find the complete
list of square/rectangular profiles.



































Scan QR-koden for at gå
direkte til listen.
Scan the QR code to go directly
to the list.

Varenr. Item no.	Materiale Material	A	B	Hårdhed Hardness	Klæb Adhesive	Min. order
30.1201KE *	EPDM	12 mm	1 mm	SH 65	Ja Yes	2.000 m
30.2005E *	EPDM	20 mm	5 mm	SH 65	Nej No	3.000 m
30.2310E *	EPDM	23 mm	10 mm	SH 60	Nej No	500 m
30.2505E *	EPDM	25 mm	5 mm	SH 65	Nej No	3.000 m
30.3003E	EPDM	30 mm	3 mm	SH 65	Nej No	
30.3006E *	EPDM	30 mm	6 mm	SH 65	Nej No	3.000 m
30.3305E *	EPDM	33 mm	5 mm	SH 65	Nej No	3.000 m
30.3310E *	EPDM	33 mm	10 mm	SH 65	Nej No	2.000 m
30.4003E	EPDM	40 mm	3 mm	SH 65	Nej No	
30.5003E	EPDM	50 mm	3 mm	SH 65	Nej No	
30.5003K	SBR	50 mm	3 mm	SH 70	Ja Yes	
30.5004E	EPDM	50 mm	4 mm	SH 60	Nej No	600 m
30.5005E *	EPDM	50 mm	5 mm	SH 65	Nej No	2.000 m
30.5010E *	EPDM	50 mm	10 mm	SH 65	Nej No	1.500 m
30.5808E *	EPDM	58 mm	8 mm	SH 65	Nej No	1.500 m
30.6502.5E *	EPDM	65 mm	2,5 mm	SH 65	Nej No	500 m
30.6705E *	EPDM	67 mm	5 mm	SH 65	Nej No	2.000 m
30.6710E *	EPDM	67 mm	10 mm	SH 65	Nej No	1.000 m
30.7505E *	SBR	75 mm	5 mm	SH 65	Nej No	1.500 m
30.10003K *	EPDM	100 mm	3 mm	SH 70	Ja Yes	
30.10005E	EPDM	100 mm	5 mm	SH 65	Nej No	1.500 m
30.15005E *	EPDM	150 mm	5 mm	SH 65	Nej No	1.000 m
30.15005KE *	EPDM	150 mm	5 mm	SH 65	Ja Yes	

















30.262S	30.WI660	30.7367	30.9691-5500 *
Material: EPDM, black Hardness: SH 65 - 75	Material: EPDM Hardness: SH 60 External: 40 x 45 x 5 mm	Material: CR, black Hardness: SH 65 <i>Conditional oil resistant</i>	Material: EPDM, white Hardness: SH 65 Fixed length: 5.500 mm Min. order: 1.100 m
30.7696	30.12759	30.OT1024* / 30.OT1024B	30.216S
Material: CR, black Hardness: SH 65 <i>Conditional oil resistant</i>	Material: EPDM, black Hardness: SH 60	Material: Silicone Hardness: SH 60 With adhesive 30.OT1024*: White 30.OT1024B: Black	Material: EPDM, black Hardness: SH 65






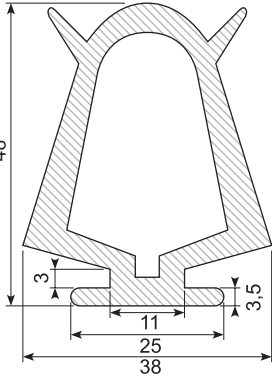






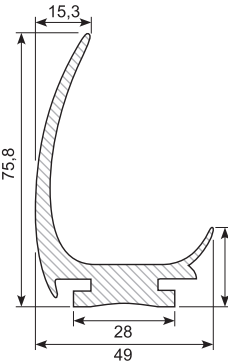

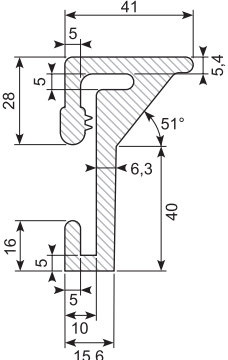

30.218S  Material: EPDM, black Hardness: SH 75 - 81	30.220L  Material: CR, black Hardness: SH 65 Length: 6,5 m <i>Conditional oil resistant</i>	30.331  Material: EPDM, black Hardness: SH 70	30.9996-10  Material: EPDM Hardness: SH 70
41.675A / 41.674A  Material: Aluminium 41.674A: 5 m anodiseret <i>anodized</i> 41.675A: 5,2 m ubehandlet <i>untreated</i>	39.1208P  Fenderprofil med kanal <i>Fender profile with channel</i> Material: PE Length: 3 m		30.7933  H-profil til aluminiumsskinne <i>H-profile for aluminium rail</i> Material: EPDM Hardness: SH 70
30.12957-2  Material: EPDM Hardness: SH 65 Length: 4,3 m		30.7932  Gummiprofil til alu-skinne <i>Rubber profile for alu-track</i> Material: EPDM Hardness: SH 70	30.7935  Material: EPDM, black Hardness: SH 65 Length: 2,8 m Min. order: 22,4 m
30.7652  Material: EPDM Hardness: SH 65	30.333X  L-profile Material: EPDM Hardness: SH 70 Rulle med <i>Roll of</i> 50 m	41.333S  Stålprofil til montering af gummiprofil 30.333 <i>Steel profile for mounting of rubber profile 30.333</i> Length: 2,6 m	30.8469  Læsebagsmækprofil med vandnæse, alu. <i>Rubber profile with drip cap. For loading tail board</i> Material: EPDM Hardness: SH 67 Length: 8 m Min. order: 80 m


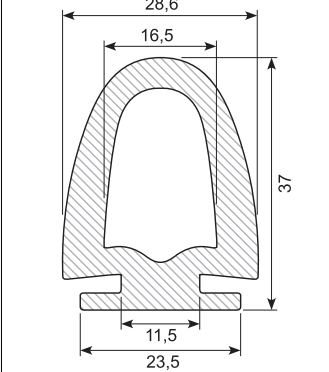
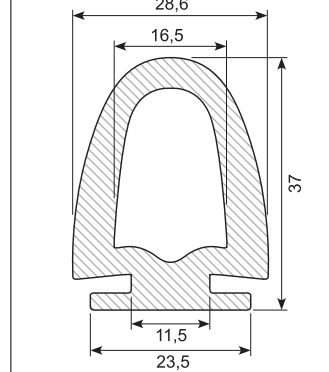












41.678  Alu C-profil Length: 5,2 m Passer til Fits 30.8469	30.325X  Material: EPDM, black Hardness: SH 65 Length: 5 m	30.324S  Material: EPDM, black Hardness: SH 65 Length: 5 m	30.324SB  Material: EPDM, black Hardness: SH 45 (blød soft) Length: 5 m
30.7649-8  D-tætningsprofil <i>D-weatherstrip</i> Material: EPDM, black Hardness: SH 60 Min. order: 1.000 m	30.7649  D-tætningsprofil <i>D-weatherstrip</i> Material: EPDM, black Hardness: SH 60	30.7649-12  D-tætningsprofil <i>D-weatherstrip</i> Material: EPDM, black Hardness: SH 60 Min. order: 1.000 m	30.12957-3  Material: EPDM Hardness: SH 60
30.14098-2  Material: EPDM Hardness: SH 60	30.9691-3  Material: EPDM, black Hardness: SH 65	30.7650  D-tætningsprofil <i>D-weatherstrip</i> Material: EPDM Hardness: SH 70	30.5881  Material: CR, black Hardness: SH 65 Betinget oliebestandig <i>Conditional oil resistant</i>
30.2151  Skørteprofil Skirt profile Material: PVC, white Rulle med Roll of 14 m Min. order: 560 m	30.6648 / 30.6648G / 30.6648S  Skørteprofil Skirt profile Hardness: SH 75 30.6648: EPDM black 30.6648G*: TPE grey 30.6648S*: TPE black	30.2151S  Material: PVC, black Hardness: SH 75 - 80 Min. order: 280 m	30.2566  Skørteprofil Skirt profile Material: PVC, black Hardness: SH 80 Height: 125 mm Rulle med Roll of 64 m

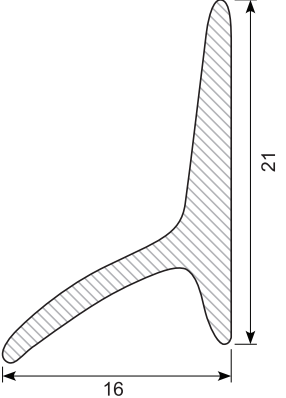
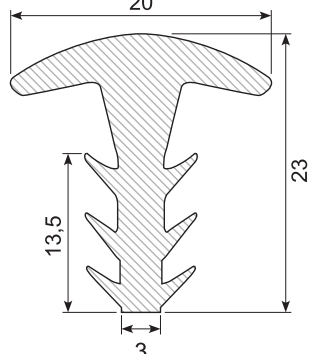
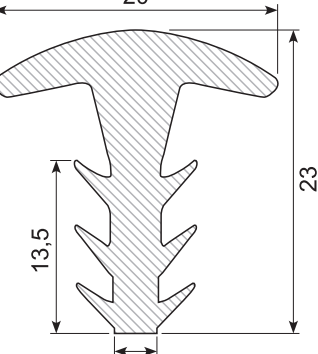


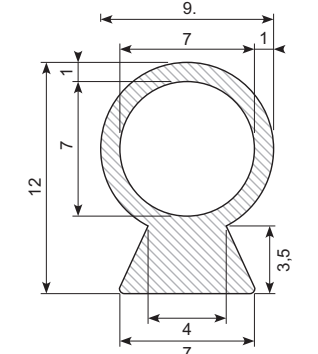
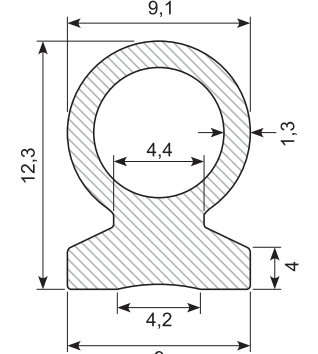
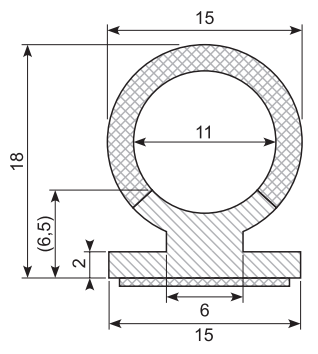



30.257S  Material: EPDM, black Hardness: SH 65	30.7780/4  Material: EPDM, black Hardness: SH 65 Length: 4 m	30.7300 / 30.7300/4  Material: EPDM, black Hardness: SH 65 30.7300: length: 3 m 30.7300/4: length: 4 m	30.7300/4Y *  Material: EPDM, yellow Hardness: SH 65 Min. order: 64 m
30.6944 *  Material: EPDM, black Hardness: SH 65 Min. order: 200 m	30.5550M  Material: EPDM, black Hardness: SH 65	30.2653 *  Material: EPDM, black Hardness: SH 65 Min. order: 1.000 m	30.5981  Material: EPDM, black Hardness: SH 65
30.8199  Material: EPDM, black Hardness: SH 65 Length: 4 m	30.8199W *  Material: EPDM, white Hardness: SH 65 Length: 4 m Min. order: 223 m	30.314S  Gummiprofil Rubber profile Material: EPDM Hardness: SH 60 / 65	30.7651  Ballonprofil Balloon profile Material: EPDM Hardness: SH 65
30.313  Co-ex profile Material: EPDM / sponge rubber Hardness: SH 80 Med klæb With adhesive	30.7648  Material: EPDM, black Hardness: SH 65	30.7106 *  Material: EPDM, black Hardness: SH 65 Min. order: 1.000 m	30.315S  Material: EPDM, black Hardness: SH 65 Length: 10 m

30.315SB Material: EPDM, black Hardness: SH 45 Length: 25 m	30.50967 * Material: NBR, black Hardness: SH 65 Oliebestandig Oil resistant Min. order: 500 m	30.13841 Material: NBR, black Hardness: SH 45 Oliebestandig Oil resistant	30.14053 Material: NBR, black Hardness: SH 50 Oliebestandig Oil resistant
30.OT3354 * Material: Silicone, white Hardness: SH 60 Min. order: 100 m	30.7645 * Material: EPDM, black Hardness: SH 45 Min. order: 50 m	30.13421 Material: EPDM Hardness: SH 65	30.7559 * Material: NBR, black Hardness: SH 60 Oliebestandig Oil resistant Min. order: 30 m
30.14130 Co-ex profile Material: EPDM Hardness: SH 70 Density: 85 - 95	30.190 Material: PVC Hardness: SH 57	30.OT10644 Material: Silicone, light grey Ø10 mm balloon	30.OT1387 * Material: Silicone, grey Hardness: SH 60 Min. order: 40 m
30.OT3272 * Material: Silicone, blue Hardness: SH 60 Min. order: 50 m	30.1428 * Material: Silicone, red/brown Hardness: SH 60	30.15170 Material: PVC, black Hardness: SH 72	32.8518 Rudeprofil End-stop profile Material: EPDM Hardness: SH 65 Rulle med Roll of 50 m

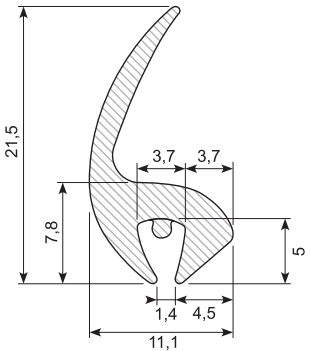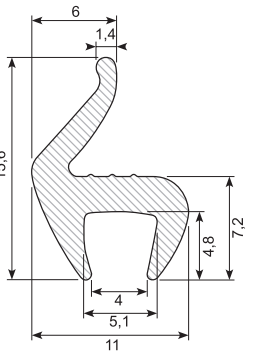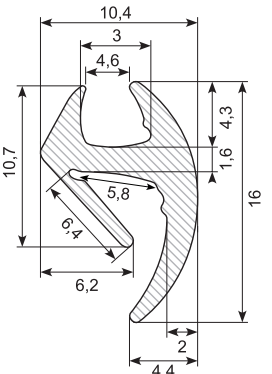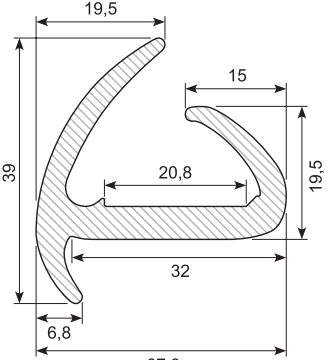32.8517  Rudeprofil End-stop profile Material: EPDM Hardness: SH 65 Rulle med Roll of 50 m	32.8520  Rudeprofil End-stop profile Material: EPDM Hardness: SH 65 Rulle med Roll of 50 m	31.369  Rudeprofil End-stop profile Material: EPDM, black Hardness: SH 65	30.798  Material: EPDM, black Hardness: SH 65
30.14163-1  Material: EPDM Hardness: SH 65	30.144  Material: EPDM, black Hardness: SH 60	30.5179  Material: EPDM	30.141  Material: EPDM Hardness: SH 60
30.142S  Material: EPDM, black Hardness: SH 65	30.14163  Material: EPDM Hardness: SH 65	30.8331  Material: EPDM, black Hardness: SH 65	30.145  Material: EPDM, black Hardness: SH 70 Min. order: 200 m
30.13447-8  Container profile Material: EPDM Hardness: SH 70 Length: 2,5 m Min. order: 500 m	30.7663  Material: EPDM, black Hardness: SH 65 Length: 5 m	30.340  Material: EPDM, black Hardness: SH 50 Length: 3 m	30.2438  Material: EPDM, black Hardness: SH 65 Length: 2,2 m









































30.4437 *  Material: EPDM, black Hardness: SH 60 Min. order: 85 m	30.7411  Material: EPDM, black Hardness: SH 65 Grip range: 1 - 1,5 mm	34.7528-2 *  Material: PVC, grey Min. order: 1.000 m	30.21202300 *  Material: EPDM Hardness: SH 70A For 6 mm glasplade Min. order: 50 m
30.762  Material: EPDM, black Hardness: SH 65	30.7266 *  Material: EPDM, black Hardness: SH 65 Min. order: 50 m	30.12932-2 *  Material: EPDM, black Hardness: SH 60 Min. order: 400 m	30.16688  Material: EPDM Hardness: SH 70
30.13049-4  Material: EPDM, black Hardness: SH 60	30.13049-2 *  Material: EPDM Hardness: SH 60 Min. order: 5.000 m	30.13049-1 *  Material: EPDM Hardness: SH 60 Min. order: 4.000 m	30.13049-5  Material: EPDM, black Hardness: SH 60
30.4469  Material: EPDM Hardness: SH 60 Silikoniseret <i>Coated with silicone</i>	30.10485  Material: EPDM Silikoniseret <i>Coated with silicone</i>	30.9387-2 *  Material: EPDM Med indvendig snor <i>With internal cord</i> Min. order: 5.000 m	31.702 *  Material: EPDM, black Hardness: SH 70 Min. order: 2.000 m










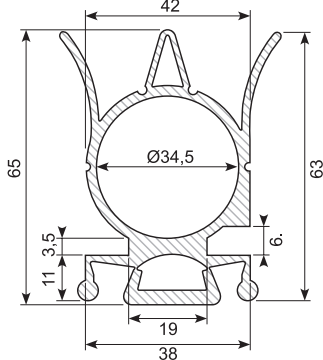


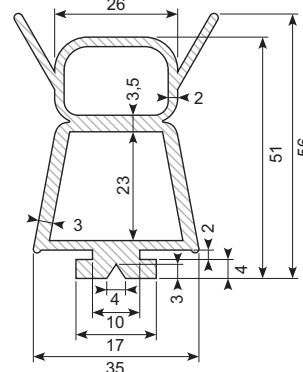









30.10461-2 *  Profil med fod og indvendig snor. Profile with foot and internal cord. Material: EPDM, with cord Min. order: 3.000 m	52.PP106 *  Kabel overkørsel Cable transmission Material: NR / SBR Rulle med Roll of 9 m	30.13503  Material: EPDM, black Hardness: SH 60 For skinne For rail: 41.13459	41.13459 *  Aluprofil for port, eloxeret overflade. Aluprofile for gate, anodized surface. Length: 6 m Calculated weight: 479 g/m For profile: 30.13503
41.13459X *  Aluprofil for port, eloxeret overflade. Aluprofile for gate, anodized surface. Length: 6 m Calculated weight: 239 g/m For profile: 30.13503 Min. order: 50 pcs. + add on costs	30.9215  Material: EPDM Hardness: SH 65 - 70	30.9826-1  Material: EPDM Hardness: SH 70	30.9826-2  Material: EPDM Hardness: SH 70
30.10036  Material: EPDM Hardness: SH 70		41.670  Eloxeret aluminium 3 m med montagehuller. Ø4 hver 200 mm. For profile 30.13242	30.16239  Material: EPDM Hardness: SH 70
30.9996-5  Material: EPDM Hardness: SH 70	30.9387-1  Material: EPDM Hardness: SH 70 Med indvendig snor With internal cord	30.9996-4  Material: EPDM Hardness: SH 70	30.9437-125  Ventilation ring Material: EPDM, black Hardness: SH 60 - 65

30.9437-160	30.9437-200	30.9437-250	30.9437-315
 Ventilation ring Material: EPDM, black Hardness: SH 60 - 65	 Ventilation ring Material: EPDM, black Hardness: SH 60 - 65	 Ventilation ring Material: EPDM, black Hardness: SH 60 - 65	 Ventilation ring Material: EPDM, black Hardness: SH 60 - 65
30.9437-400	45.205SX	45.209BX	45.210BX
 Ventilation ring Material: EPDM, black Hardness: SH 60 - 65	 Material: PVC, silver grey Min. order: 3.000 m	 Material: PVC, black	 Material: PVC, white
45.210C / 45.210CX	45.208	41.406	
 Material: PVC, off white	 Material: PVC, blue	 Vandrende, upoleret Water gutter, unpolished Size: 17 x 24 Length: 5 m Min. order: 1.770 m	

















Group 0010	Group 0021	Group 0023	Group 0107	Group 0030
Group 0011	Group 0175	Group 0201	Group 0106	Group 0120
Group 0012	Group 0022	Group 0024	Group 0209	Group 0124
Group 0020	Group 0101	Group 0025	Group 0111	Group 0126
Group 0121	Group 0100	Group 0109	Group 0110	Group 0125
Group 0139	Group 0108	Group 0153	Group 0112	Group 0160
Group 0150	Group 0186	Group 0169	Group 0192	Group 0159
Group 0178	Group 0113	Group 0208	Group 0214	Group 0119
















Group 0102	Group 0104	Group 0129	Group 0127	Group 0171
Group 0517	Group 0145	Group 0130	Group 0191	Group 0516
Group 0102A	Group 0179	Group 0131	Group 0206	Group 0144
Group 0103	Group 0105	Group 0132	Group 0134	Group 0194
Group 0103A	Group 0172	Group 0133	Group 0211	Group 0147
Group 0146	Group 0188	Group 0181	Group 0167	Group 0128
Group 0199	Group 0158	Group 0170	Group 0140	Group 0137
Group 0155	Group 0141	Group 0207	Group 0508	Group 0148






Group 0122	Group 0176	Group 0177	Group 0143	Group 0164
				
Group 0123	Group 0197	Group 0165	Group 0117	Group 0166
				
Group 0157	Group 0173	Group 0182	Group 0187	Group 0138
				
Group 0151	Group 0189	Group 0190	Group 0115	Group 0196
				
Group 0200	Group 0152	Group 0215	Group 0210	Group 0205
				
Group 0180	Group 0168	Group 0198	Group 0213	Group 0163
				
Group 0156	Group 0142	Group 0154	Group 0512	Group 0193
				
Group 0183	Group 0202	Group 0116	Group 0510	Group 0193
				

Group 0514	Group 0195	Group 0501	Group 0174	Group 0507
				
Group 0203	Group 0502	Group 0184	Group 0212	Group 0503
				
Group 0184	Group 0118	Group 0185	Group 0504	Group 0513
				
Group 0161	Group 0204	Group 0505	Group 0136	Group 0515
				
Group 0511	Group 0506	Group 0135	Group 0509	
				
















Skaffevarer - Du kan finde de tilgængelige størrelser online på bibus-sindby.dk, eller kontakte os for yderligere information
Sourcing items - Available sizes can be found online at bibus-sindby.dk, or you can contact us for more information

50.083013 *  Material: PVC co-ex profile, 13 mm, white / black lips Length: 5 m 4 soft lips Min. order: 1.000 m	50.083015GGX *  Material: PVC co-ex profile, 15 mm, grey / light grey lips Length: 4 m 4 soft lips Min. order: 1.920 m	50.083030  Material: PVC co-ex profile, 18 mm, white / black lips Length: 5 m 4 soft lips	50.083032GG *  Material: PVC co-ex profile, 18,4 mm, grey / grey lips Length: 4,8 m 4 soft lips Min. order: 1.200 m
50.083033 *  Material: PVC co-ex profile, 19 mm, light grey / black lips Length: 5 m 4 soft lips Min. order: 2.500 m	50.083040GS  Material: PVC co-ex profile, 21 mm, grey / black lips Length: 6 m 4 soft lips	50.083040 *  Material: PVC co-ex profile, 21 mm, white / black lips Length: 5 m 4 soft lips Min. order: 200 m	50.083040G  Material: PVC co-ex profile, 21 mm, grey / grey lips Length: 5 m 4 soft lips
50.083040GG *  Material: PVC co-ex profile, 20,8 mm, grey / grey lips Length: 6 m 4 soft lips Available in other colors Min. order: 60-120 m	50.083045X *  Material: PVC co-ex profile, 25 mm Length: 5 m 3 soft lips Available in other colors Min. order: 250 m (China)	54.710720 *  Material: PVC co-ex profile, 25 mm Hardness: Hard/soft Length: 3 m 4 soft lips Min. order: 25 m	50.083045G  Material: PVC co-ex profile, 25 mm Length: 6 m soft lips Available in other colors
50.083046 *  Material: Co-ex profile, 27 mm light grey / light grey lips Length: 5 m 2 soft lips Min. order: 500 m	50.083050GG *  Material: PVC co-ex profile, 30 mm, grey / grey lips Length: 5 m 2 soft lips Available in other colors Min. order: 100-200 m	50.083050H *  Material: PVC co-ex profile, 30 mm, white / black lips Length: 5 m 2 soft lips Available in other colors Min. order: 100-200 m	50.083050  Material: PVC co-ex profile, 30 mm, white / black lips Length: 5 m 2 soft lips

















50.083052G *  Material: PVC co-ex profile, 35 mm, grey / grey lips Length: 3 m 4 soft lips Available in other colors Min. order: 300 m	50.083055G  Material: PVC co-ex profile, 35 mm, light grey / grey lips Length: 5 m 4 soft lips	50.083060 *  Material: PVC co-ex profile, 40 mm, white / black lips Length: 5 m 4 soft lips Available in other colors Min. order: 500 m	50.083060GG  Material: PVC co-ex profile, 40 mm, Grey/Grey lips Length: 5 m 4 soft lips
50.083061 *  Material: PVC co-ex profile, 42 mm, white / black lips Length: 5 m 4 soft lips Min. order: 250 m (China)	50.083065 *  Material: PVC co-ex profile, 45 mm, grey / grey lips Length: 5 m 3 soft lips Available in other colors Min. order: 250 m	50.083070G *  Material: PVC co-ex profile, 55 mm, light grey / grey lips Length: 5 m 4 soft lips Min. order: 1.500 m	
50.083070GG *  Material: PVC co-ex profile, 55 mm, light grey / grey lips Length: 5 m 4 soft lips Min. order: 200 m	50.083070B *  Material: PVC co-ex profile, 55 mm, white / black lips Length: 5 m 4 soft lips Min. order: 500 m	54.710770 *  Material: PVC co-ex profile, 30 mm, grey Length: 3 m 4 soft lips Min. order: 50 m	50.083081  Material: PVC co-ex profile, 65 mm, black 5 bløde læber 5 soft lips
50.083080G  Material: PVC co-ex profile, 65 mm, grey / grey lips Length: 5 m 2 soft lips	50.083088 *  Material: PVC co-ex profile, 81 mm, black / black lips 5 soft lips Min. order: 250 m	50.083089  Material: PVC co-ex profile, 81 mm, black / black lips 5 soft lips	50.083095BB  Material: PVC, black Length: 5 m Hardness: SH 60 5 soft lips









50.083090  Material: PVC co-ex profile, 83 mm, light grey / light grey lips Length: 5 m 4 soft lips	50.083095B *  Material: PVC co-ex profile, 84 mm, white / black lips Length: 5 m 4 soft lips Min. order: 500 m	50.083095G *  Material: PVC co-ex profile, 85 mm, white / black lips Length: 5 m 4 soft lips Min order: 250 m	
50.083000GG  Grey connection part. Soft PVC. In running meters. Cut as below and glue onto co-extruded profiles to reinforce corners.	50.083000SS  Black connection part. Soft PVC. In running meters. Cut as below and glue onto co-extruded profiles to reinforce corners.		














31.018S Material: EPDM, black Hardness: SH 65	31.018X * Material: PVC, black Hardness: SH 65 Min. order: 4.000 m	34.018X * Material: PVC, light grey Hardness: Soft Plate: 1 mm Min. order: 4.000 m	30.11393 Material: Silicone, grey Hardness: SH 50
34.14334X Material: Hard PVC, black Plate: 1,5 - 2 mm	31.060S Material: EPDM, black Hardness: SH 65	31.041S Material: EPDM, black Hardness: SH 65	31.042S Material: EPDM, black Hardness: SH 65
30.OT3394 * Material: Silicone, black Min. order: 100 m	31.047 * Material: EPDM, black Hardness: SH 65 Min. order: 1.000 m	31.063 Material: EPDM, black Hardness: SH 65	30.9548 Material: PVC hard, light grey Length: 3,9 m
31.025S * Material: EPDM, black Hardness: SH 65 Min. order: 600 m	31.021S Material: EPDM, black Hardness: SH 65	31.022S Material: EPDM, black Hardness: SH 65	34.031X Material: PVC, transparent Hardness: Soft

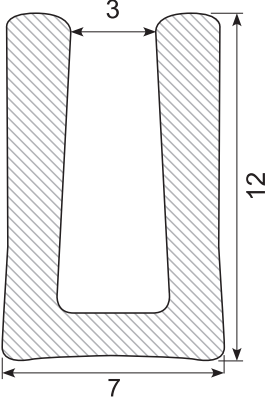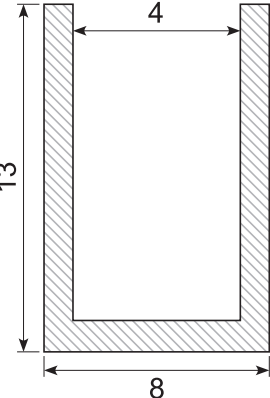





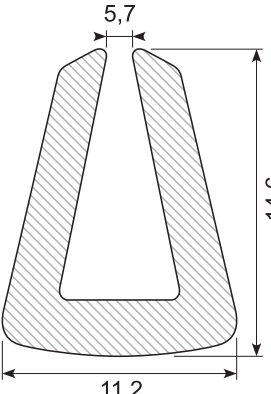

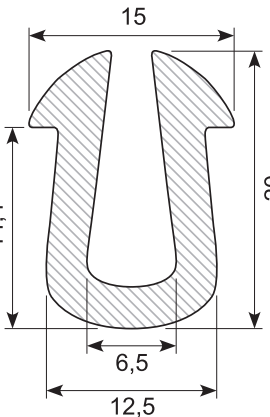



30.13086  Material: EPDM, black Hardness: SH 80	31.043S  Material: EPDM, black Hardness: SH 65	31.064  Material: EPDM, black Hardness: Hard	31.065S  Material: EPDM, black Hardness: SH 65
31.061S  Material: EPDM, black Hardness: SH 65	30.6622N  Material: NBR, black Hardness: SH 65 Oil resistant	30.6622 *  Material: EPDM, black Hardness: SH 65 Min. order: 500 m	31.216ST  Material: EPDM, black Hardness: SH 65
31.216GS  Material: Silicone, light grey Ral 7040 Hardness: SH 70	30.11459 *  Material: Transparent silicone Hardness: SH 45 Min. order: 250 m	34.035  Material: PVC, transparent Hardness: Hard	31.066  Material: Silicone, black Hardness: SH 70
30.6724  Material: EPDM, black Hardness: SH 65	30.14507-1 *  Material: EPDM, black Min. order: 3.000 m	30.14507-2 *  Material: EPDM, black Min. order: 3.000 m	31.068S  Material: EPDM, black Hardness: SH 65

















30.1386 Material: EPDM, black Hardness: SH 65	30.OT3440 * Material: Silicone, black Hardness: SH 60 Min. order: 100 m	30.12896 Material: EPDM, black Hardness: SH 65	31.074S * Material: EPDM, black Min. order: 1.000 m
30.7987 Material: EPDM, black Hardness: SH 65	30.OT0136 * Material: Silicone, white Min. order: 100 m	31.070S Material: EPDM, black Hardness: SH 50	31.071S Material: EPDM, black Hardness: SH 65
30.2455 Material: PVC, black Length: 3.111 mm	30.11774 * Material: EPDM Hardness: SH 65 10-13 mm glass Min. order: 1.000 m	30.7508 * Material: EPDM, black Hardness: SH 65 Min. order: 400 m	30.9519 * Material: PVC soft, black Min. order: 7.000 m
30.12932-1 * Material: EPDM, black Hardness: SH 60 Min. order: 500 m	30.13535 * Material: EPDM, black Hardness: SH 60 Min. order: 420 m	30.7509 Material: EPDM, black Hardness: SH 65	30.10777-1 * Material: TPE, black Hardness: SH 60 Min. order: 100 m

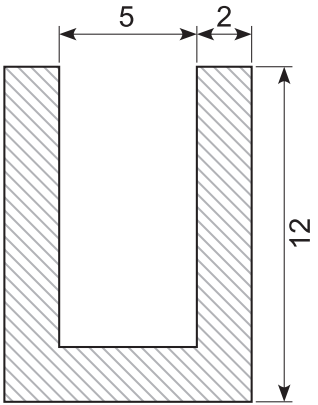

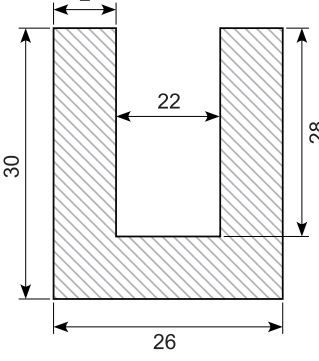


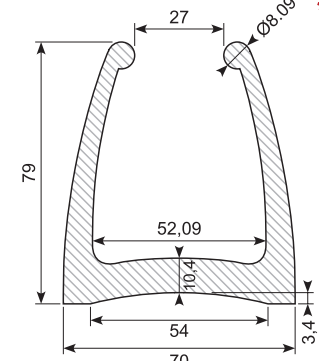
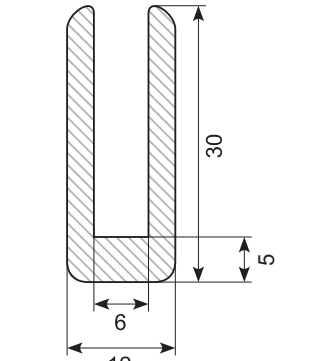
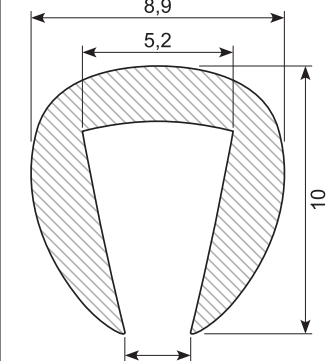
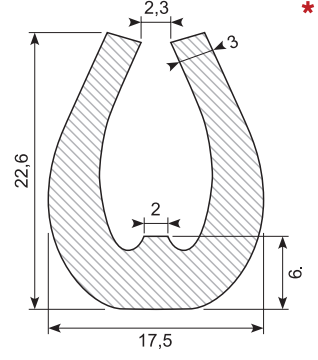
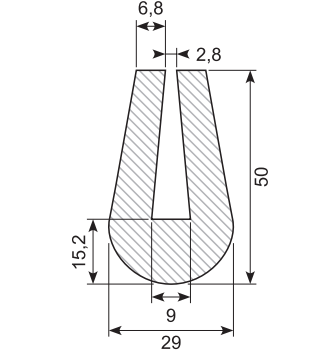
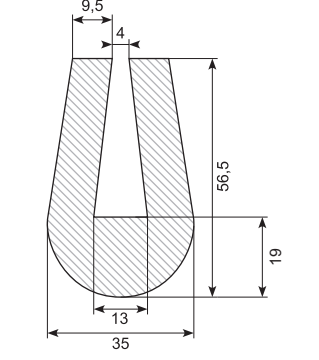
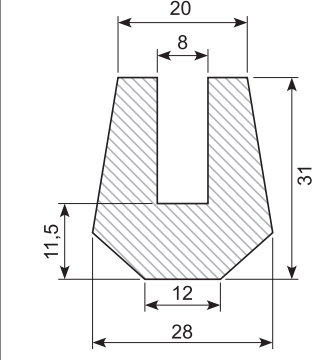


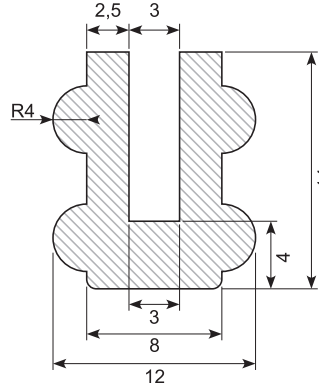
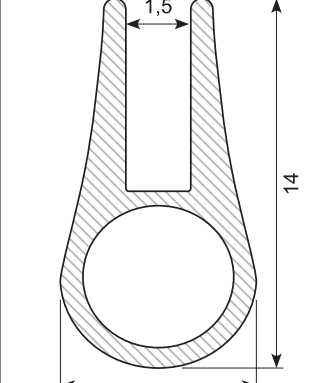
30.21101205  Material: EPDM Hardness: SH 70	30.14507-3 *  Material: EPDM Min. order: 2.000 m	31.050 *  Material: EPDM, black Hardness: SH 65 Min. order: 500 m	30.14356 *  Material: TPE, black Hardness: SH 60 Min. order: 50 - 100 m
31.048 *  Material: EPDM, black Hardness: SH 65 Min. order: 250 m	30.11911 *  Material: EPDM Hardness: SH 65 Min. order: 300 m	30.2984-5  U-profile Material: EPDM Hardness: SH 70	34.117/6  Material: PVC, metal grey
30.2984-6 *  U-profile Material: EPDM Hardness: SH 80 Rulle med Roll of 50 m	30.2984-1  U-profile Material: EPDM Hardness: SH 70 Rulle med Roll of 25 m	30.2984-2  U-profile Material: EPDM Hardness: SH 65 Rulle med Roll of 25 m	30.2984-3  U-profile Material: EPDM Hardness: SH 70 Rulle med Roll of 25 m
30.7519NBR *  Material: NBR, grey Hardness: SH 65 Length: 3 m Oil resistant Min. order: 500 m	30.7519 *  Material: EPDM, black Hardness: SH 65 Length: 50 m coils Min. order: 50 - 250 m	30.14227 *  Material: Silicone, transparent Min. order: 100 m	31.037SI  Material: Silicone, black








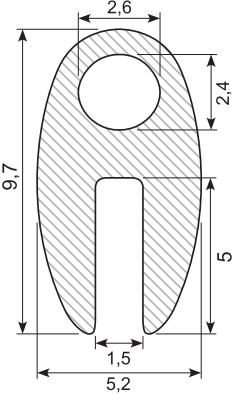
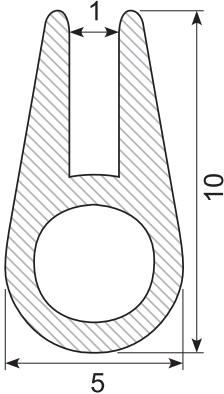
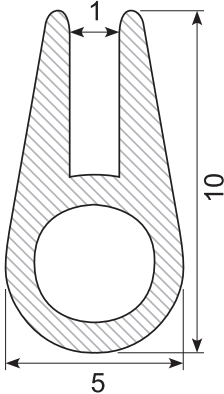
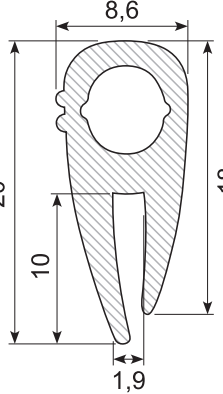
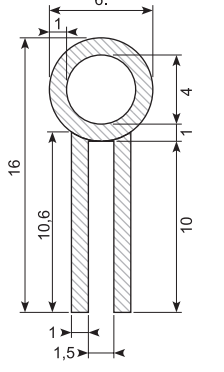
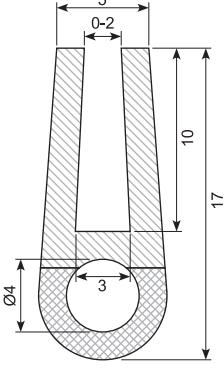
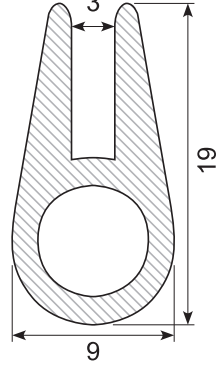
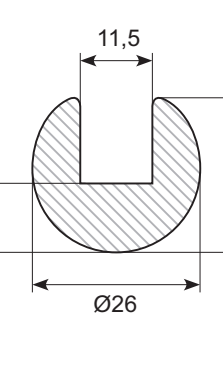
31.035S  Material: EPDM, black Hardness: SH 65	31.036SI *  Material: Silicone, black Min. order: 200 m	31.036SI-LTC  Material: Silicone, black UL94 godkendt approved	30.9884X *  Material: EPDM Min. order: 3.000 m
31.037 *  Material: EPDM Hardness: SH 56 - 60 Min. order: 2.000 m	30.9885  Material: EPDM Hardness: SH 60	31.038SI  Material: Silicone, black Hardness: SH 60	30.211.04.385 *  Material: EPDM Hardness: SH 70 Min. order: 50 m

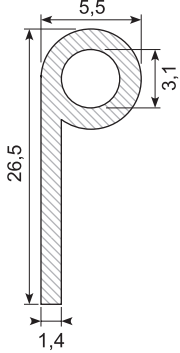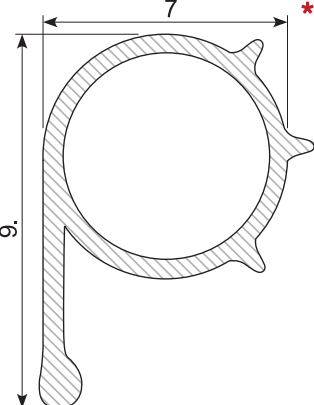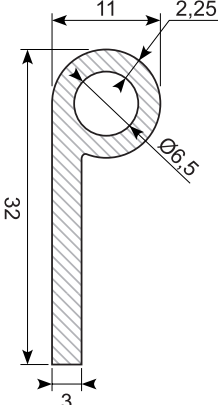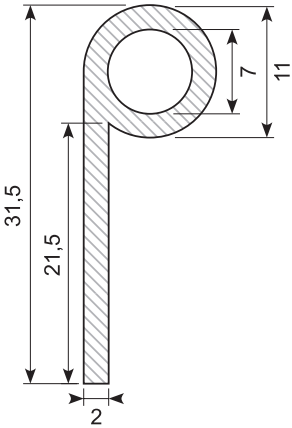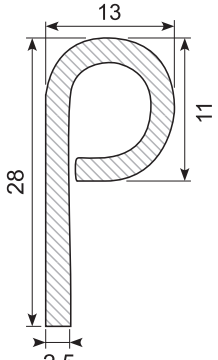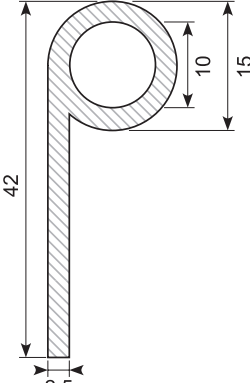
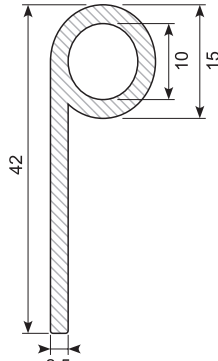
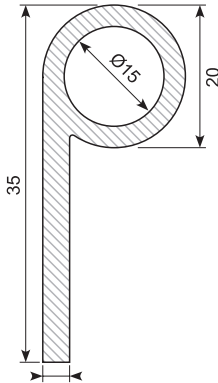
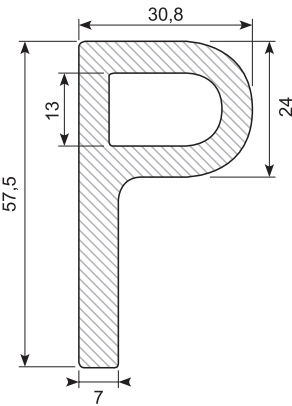
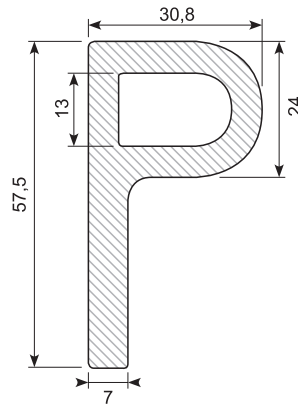
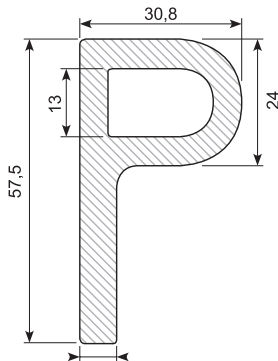
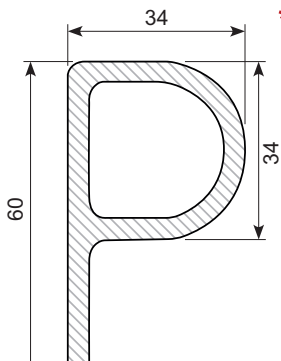
30.22381  Material: CR, black Hardness: SH 70 Betinget oliebestandig	30.OT101  Material: Silicone, brown Min. order: 100 m	30.182  Material: Silicone, FDA conform, grey RAL 7040 Hardness: SH 60 Max. 180 °C	30.13708  Material: Silicone, white Hardness: SH 45
30.7408X  Material: EPDM, black	30.148S  Material: EPDM, black Hardness: SH 65 Min. order: 450 m	30.OT2036  Material: Silicone, black Max. 270 °C	30.138S  Material: EPDM, black Hardness: SH 65
30.138NBR  Material: NBR Oil resistant Min. order: 100 m	30.140  Material: SEBS, black Hardness: SH 60		
30.136  Material: EPDM, black Hardness: SH 65	30.136/45  Material: EPDM, black Hardness: SH 45, soft	30.136NBR  Material: NBR, black Hardness: SH 65 Oil resistant	30.OT1057  Material: Silicone, white Max. 270 °C Min. order: 50 m

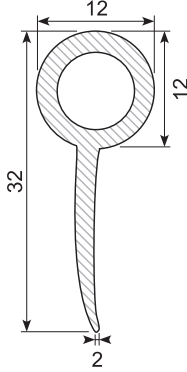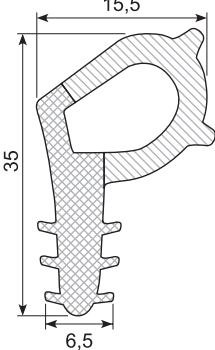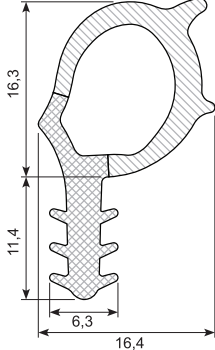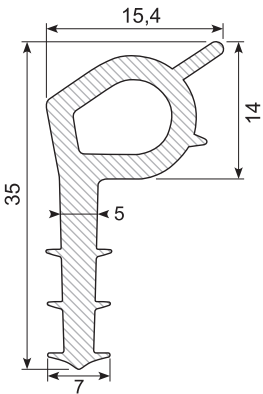52.269X  Material: PVC, black Hardness: Medium	30.176 *  Material: EPDM, black Hardness: SH 65 Min. order: 1.000 m	30.180  Material: EPDM, black Hardness: SH 65	
30.8538 *  Material: EPDM co-ex Hardness: SH 70 Density: 0,65 Min. order: 2.000 m	30.8538B *  Material: EPDM co-ex Hardness: SH 65 Density: 0,5 Min. order: 2.000 m	30.OT3271 *  Material: Silicone, light grey Min. order: 1.000 m	
30.OT1080  Material: Silicone, white Hardness: SH 60	30.OT1081  Material: Silicone, white	30.6487 *  Material: PVC, grey Length: 3 m Min. order: 1.000 m	30.SM251 *  Material: TPE / EPDM, grey Hardness: SH 65 Length: 25 m Min. order: 200 m
30.OT3334F  Material: Silicone, white	31.OT2179 *  Material: Silicone, white Min. order: 100 m		


32.016S  Material: EPDM, black Hardness: SH 65 Min. radius: 90 mm	32.924  Material: EPDM, black Hardness: SH 60 Min. radius: 30 mm Husk låsekile Remember filler strip: 32.924K	32.2024CR *  Material: CR, black Hardness: SH 65 Min. radius: 80 mm Oil resistant Min. order: 200 m	32.1024S  Material: EPDM, black Hardness: SH 65 Min. radius: 80 mm
32.1025S  Material: EPDM, black Hardness: SH 65 Min. radius: 80 mm	32.2024M  Material: EPDM, black Hardness: SH 65 Min. radius: 80 mm	32.1025SK *  Material: EPDM, black Hardness: SH 65 Min. radius: 80 mm Inkl. kile Incl. filler strip	32.034S  Material: EPDM, black Hardness: SH 65 Min. radius: 90 mm
32.036S  Material: EPDM, black Hardness: SH 65 Min. radius: 75 mm	32.1045SK *  Material: EPDM, black Hardness: SH 65 Min. radius: 80 mm Inkl. kile Incl. filler strip Min. order: 100 m	32.044S  Material: EPDM, black Hardness: SH 65 Min. radius: 75 mm	32.046S  Material: EPDM, black Hardness: SH 65 Min. radius: 90 mm
32.2045M  Material: EPDM, black Hardness: SH 65 Min. radius: 90 mm	30.8439  Material: EPDM, black Hardness: SH 65	32.036X  Material: EPDM, black Hardness: SH 65	32.047  Material: EPDM, black Hardness: SH 65 Min. radius: 90 mm

32.1045S  Material: EPDM, black Hardness: SH 65 Min. radius: 90 mm	32.057 *  Material: EPDM, black Hardness: SH 65 Min. radius: 100 mm Min. order: 300 m	32.255S  Material: EPDM, black Hardness: SH 65 Min. radius: 100 mm	32.064S  Material: EPDM, black Hardness: SH 70
32.066  Material: EPDM, black Hardness: SH 65 Min. radius: 80 mm	32.075  Material: EPDM, black Hardness: SH 65 Min. radius: 100 mm	32.095S  Material: EPDM, black Hardness: SH 65 Min. radius: 115 mm	32.512  Material: EPDM, black Hardness: SH 65 Min. radius: 115 mm
32.165  Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm	32.514S *  Material: EPDM, black Hardness: SH 65 Min. radius: 110 mm Min. order: 300 m	32.516S  Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm	32.523S  Material: EPDM, black Hardness: SH 65 Min. radius: 110 mm
32.527  Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm	32.1037S  Husk låsekiler <i>Remember filler strips</i> 32.1307S 32.309X Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm	32.1640 *  Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm Min. order: 50 m	32.754S  Material: EPDM, black Hardness: SH 65 Min. radius: 100 mm Sikkerhedsgummi <i>Safety rubber</i>

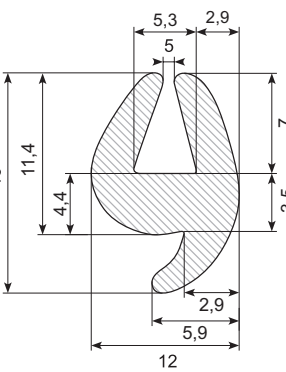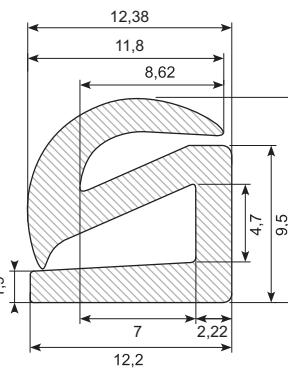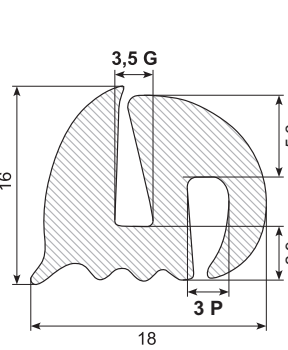32.866 *  Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm Safety rubber Min. order: 250 m	32.795S *  Material: EPDM, black Hardness: SH 65 Min. radius: 100 mm Safety rubber Min. order: 50 m	32.7125 *  Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm Safety rubber Min. order: 250 m	32.7195S  Material: EPDM, black Hardness: SH 65 Min. radius: 120 mm Safety rubber
31.365 *  Material: EPDM, black Hardness: SH 65 Min. order: 1.000 m	31.116S  Material: EPDM, black Hardness: SH 65	31.112S  Material: EPDM, black Hardness: SH 65	31.145S  Material: EPDM, black Hardness: SH 65
31.148  Material: EPDM, black Hardness: SH 65	31.155  Material: EPDM, black Hardness: SH 65	31.6701 *  Material: EPDM, black Hardness: SH 65	31.6703 *  Material: EPDM, black Hardness: SH 65
31.6702 *  Material: EPDM, black Hardness: SH 65 Min. order: 500 m	32.1307S  Material: EPDM, black Hardness: SH 65	32.076  Material: EPDM, black Hardness: SH 65 Min. radius: 100 mm	

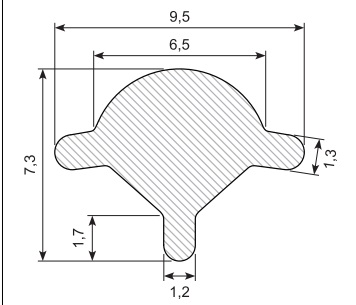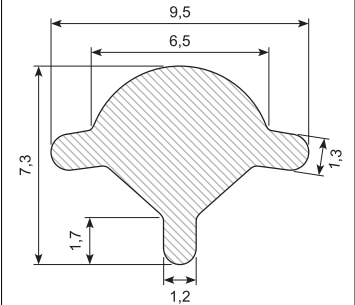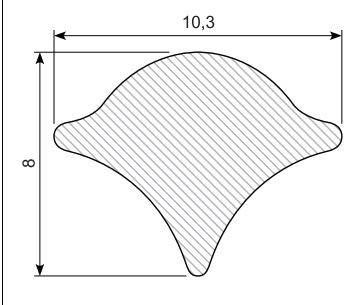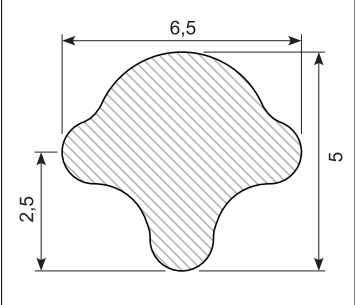32.309X  Material: PVC, black	32.301X  Material: PVC, dark grey	32.300X  Material: PVC, white	32.1301  Material: PVC, chrome
32.409X  Material: PVC, black	32.009S  Material: EPDM, black Hardness: SH 65	32.924K  Material: EPDM, black For 32.924	

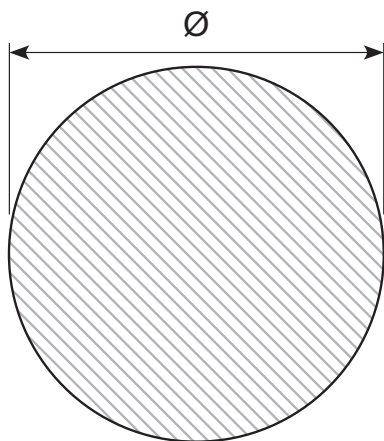Svampegummi Spongerubber cord



Material: EPDM, mørkegrå dark grey

Hardness: SH16 - 20

Density: 0,4 - 0,5

Varenr. Item no.	Ø
36.102E	2 mm
36.1025E *	2,5 mm
36.103E *	3 mm
36.1035E *	3,5 mm
36.1045E *	4,5 mm
36.105E *	5 mm
36.106E	6 mm
36.106EG * lysegrå light grey	6 mm
36.106ESP *	6 mm
36.107E	7 mm
36.108E *	8 mm
36.108EG * lysegrå light grey	8 mm
36.109E *	9 mm
36.110E *	10 mm
36.111E *	
36.112E *	12 mm
36.112EG lysegrå light grey	12 mm
36.117E	17 mm
36.118E	18 mm
36.120E *	20 mm
36.122E *	22 mm
36.125E *	25 mm
36.130EX *	30 mm
36.135E *	35 mm

Material: CR, mørkegrå dark grey

Hardness: SH16 - 22

Density: 0,4 - 0,6

Varenr. Item no.	Ø
36.102CR	3 mm
36.103CR	3 mm
36.104CR	4 mm
36.105CR	5 mm
36.106CR	6 mm
36.107CR	7 mm
36.108CR	8 mm
36.110CR	10 mm
36.112CR	12 mm
36.115CR sort black	15 mm
36.118CR * sort black	18 mm
36.119CR *	19 mm
36.120CR *	20 mm
36.122CR	22 mm

Material: EPDM, sort black

Hardness: SH16 - 20

Density: 0,45 - 0,6

Varenr. Item no.	Ø	Min. order
36.7004.5X *	4,5 mm	3.000 m
36.7005X *	5 mm	3.000 m
36.7006X *	6 mm	3.000 m
36.7007X *	7 mm	3.000 m
36.7008X *	8 mm	3.000 m
36.7008.5X *	8,5 mm	3.000 m
36.7009X *	9 mm	3.000 m
36.7010X *	10 mm	3.000 m
36.7010.5X *	10,5 mm	3.000 m
36.7011X *	11 mm	3.000 m
36.7011.5X *	11,5 mm	3.000 m
36.7012X *	12 mm	3.000 m
36.7014X *	14 mm	3.000 m
36.7018X *	18 mm	
36.7028X *	28 mm	
36.7064X *	64 mm	

Material: EPDM, sort black


Hardness: SH16 - 20

Density: 0,45 - 0,6

Varenr. Item no.	Ø
36.7003 *	3 mm
36.7004	4 mm
36.7005	5 mm
36.7006 *	6 mm
36.7008	8 mm
36.7009	9 mm
36.7010	10 mm
36.7012	12 mm
36.7015	15 mm
36.7050 *	50 mm


Svampegummislange *Sponge rubber hose*

Material: EPDM, sort *black*



Varenr. Item no.		A x B	Min. order
36.34155105	*	15,5 x 10,5 mm	
36.3416068	*	16 x 6,8 mm	
36.342026	*	26 x 20 mm	1.000 m
36.342226	*	26 x 22 mm	1.000 m
36.342529	*	29 x 25 mm	1.000 m
36.342030	*	30 x 20 mm	550 m
36.342232	*	32 x 22 mm	500 m
36.342433	*	33 x 24 mm	500 m
36.341840	*	40 x 18 mm	200 m
36.342840	*	40 x 28 mm	250 m
36.344511	*	45 x 11 mm	

Svampegummi, halvrund *Sponge rubber, half round*



Material: EPDM

Varenr. Item no.	A x B	Farve Color
36.198	6 x 8 mm	Grå Grey
36.198S	6 x 8 mm	Sort Black
36.208	10 x 20 mm	Lysegrå Light grey
36.3314	12 x 17 mm	Mørkegrå Dark grey

* min. order: 100m


Material: CR, mørkegrå *dark grey*
Hardness: SH16 - 20
Density: 0,4

Varenr. Item no.	A x B
36.198CR *	6 x 8 mm
36.200	8 x 8 mm

Material: NR, blågrå *blue grey*
Hardness: SH16 - 20
Density: 0,45 - 0,6

Varenr. Item no.	A x B
36.197	4 x 6 mm
36.198A *	6 x 8 mm

Svampegummi *Sponge rubber*




Material: EPDM, mørkegrå *dark grey*
Hardness: SH 14 - 16
Density: 0,38 - 0,42

Flere størrelser kan skaffes.
 Find den komplette liste på vores
 hjemmesiden ved at scanne QR-koden.
 More sizes are available upon request
 Scan the QR-code to see the complete
 list on our homepage.



Varenr. Item no.	A x B	Varenr. Item no.	A x B	Varenr. Item no.	A x B	35.6040 Varenr. Item no.	A x B
35.0806 *	8 x 6 mm	35.1515	15 x 15 mm	35.2510	25 x 10 mm	35.3535 *	35 x 35 mm
35.1003 *	10 x 3 mm	35.1605 *	16 x 5 mm	35.2515	25 x 15 mm	35.4005 *	40 x 5 mm
35.1004 *	10 x 4 mm	35.1608 *	16 x 8 mm	35.2520	25 x 20 mm	35.4010	40 x 10 mm
35.1005	10 x 5 mm	35.2003 *	20 x 3 mm	35.2525	25 x 25 mm	35.4020	40 x 20 mm
35.1007 *	10 x 7 mm	35.2005	20 x 5 mm	35.3005 *	30 x 5 mm	35.4030 *	40 x 30 mm
35.1008	10 x 8 mm	35.20055 *	20 x 5,5 mm			35.4035 *	40 x 35 mm
35.1010	10 x 10 mm	35.2010	20 x 10 mm	35.3010	30 x 10 mm	35.4040	40 x 40 mm
35.1203 *	12 x 3 mm	35.2012	20 x 12 mm	35.3012 *	30 x 12 mm	35.4505 *	45 x 5 mm
35.1209 *	12 x 9 mm	35.2015	20 x 15 mm	35.3015	30 x 15 mm	35.5005 *	50 x 5 mm
35.1212	12 x 12 mm	35.2018 *	20 x 18 mm	35.3020	30 x 20 mm	35.5006 *	50 x 6 mm
35.1503 *	15 x 3 mm	35.2020	20 x 20 mm	35.3025	30 x 25 mm	35.5010 *	50 x 10 mm
35.1507 *	15 x 7 mm	35.2502	25 x 2 mm	35.3030	30 x 30 mm	35.6010 *	60 x 10 mm
35.1510	15 x 10 mm	35.2505	25 x 5 mm	35.3505 *	35 x 5 mm	35.6040 *	60 x 40 mm
35.1512 *	15 x 12 mm	35.2506 *	25 x 6 mm	35.3510 *	35 x 10 mm	35.5025	50 x 25 mm

Svampegummi med klæb *Sponge rubber with adhesive*



Material: EPDM, mørkegrå dark grey

Hardness: SH 14 - 16

Density: 0,38 - 0,42

Flere størrelser kan skaffes.
Find den komplette liste på vores
hjemmesiden ved at scanne QR-koden.
More sizes are available upon request
Scan the QR-code to see the complete
list on our homepage.




Varenr. Item no.	A x B
35.0806K *	8 x 6 mm
35.0808K *	8 x 8 mm
35.1003K	10 x 3 mm
35.1004K *	10 x 4 mm
35.1005K	10 x 5 mm
35.1007K *	10 x 7 mm
35.1008K	10 x 8 mm
35.1010K	10 x 10 mm
35.1203K *	12 x 3 mm
35.1204K *	12 x 4 mm
35.1204KL	12 x 4 mm
35.1206K *	12 x 6 mm
35.1208K *	12 x 8 mm
35.1209K *	12 x 9 mm
35.1212K *	12 x 12 mm
35.1503K *	15 x 3 mm
35.1504K	15 x 4 mm
35.1505K	15 x 5 mm
35.1506K	15 x 6 mm
35.1507K *	15 x 7 mm

Varenr. Item no.	A x B
35.1510K	15 x 10 mm
35.1512K	15 x 12 mm
35.1515K	15 x 15 mm
35.1605K *	16 x 5 mm
35.1608K *	16 x 8 mm
35.1708K *	17 x 8 mm
35.1803K *	18 x 3 mm
35.18053K *	18 x 5,3 mm
35.1809K *	18 x 9 mm
35.1904K *	19 x 4 mm
35.2003K	20 x 3 mm
35.2005K	20 x 5 mm
35.2006K *	20 x 6 mm
35.20055K *	20 x 5,5 mm
35.2010K *	20 x 10 mm
35.2010KL	20 x 10 mm
35.2012K	20 x 12 mm
35.2015K	20 x 15 mm
35.2020K	20 x 20 mm

Varenr. Item no.	A x B
35.2207K *	22 x 7 mm
35.2505K	25 x 5 mm
35.2508K *	25 x 8 mm
35.2510K	25 x 10 mm
35.2515K	25 x 15 mm
35.2520K	25 x 20 mm
35.2525K	25 x 25 mm
35.2806K	28 x 6 mm
35.3003K	30 x 3 mm
35.3005K	30 x 5 mm
35.3006K *	30 x 6 mm
35.3007K *	30 x 7 mm
35.3010K	30 x 10 mm
35.3012K	30 x 12 mm
35.3015K	30 x 15 mm
35.3020K	30 x 20 mm
35.3025K *	30 x 25 mm
35.3030K	30 x 30 mm
35.3505K *	35 x 5 mm

Varenr. Item no.	A x B
35.3510K *	35 x 10 mm
35.3535K *	35 x 35 mm
35.4003K	40 x 3 mm
35.4005K	40 x 5 mm
35.4010K	40 x 10 mm
35.4012K *	40 x 12 mm
35.4020K *	40 x 20 mm
35.4030K	40 x 30 mm
35.4035K *	40 x 35 mm
35.4040K	40 x 40 mm
35.4505K *	45 x 5 mm
35.5006K	50 x 6 mm
35.5010K	50 x 10 mm
35.5020K *	50 x 20 mm
35.6002K *	60 x 2 mm
35.8020K *	80 x 20 mm
35.10020K *	100 x 20 mm

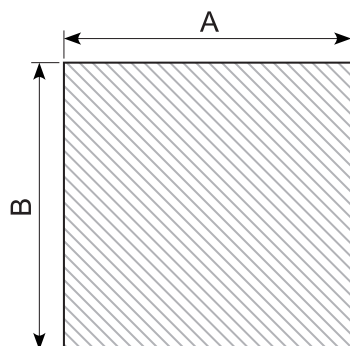Svampegummiprofil *Sponge rubber profile*



Material: EPDM, mørkegrå dark grey

Hardness: SH 16 - 20

Density: 0,4 - 0,5

Varenr. Item no.	A x B
36.1010E	10 x 10 mm
36.1210E *	12 x 10 mm
36.1503E *	15 x 3 mm
36.1505E	15 x 5 mm
36.1510E *	15 x 10 mm
36.1512E *	15 x 12 mm
36.1612E *	16 x 12 mm
36.1815EG *	18 x 15 mm

Varenr. Item no.	A x B
36.2010E *	20 x 10 mm
36.2520E *	25 x 20 mm
36.2525E *	25 x 25 mm
36.3010E *	30 x 10 mm
36.3025E *	30 x 25 mm
36.3520E *	35 x 20 mm
36.4010E *	40 x 10 mm


Varenr. Item no.	A x B
36.4015E *	40 x 15 mm
36.4020E *	40 x 20 mm
36.4025E *	40 x 25 mm
36.4030E *	40 x 30 mm
36.5010E	50 x 10 mm
36.5020E *	50 x 20 mm
36.6030E *	60 x 30 mm
36.5025E	50 x 25 mm

Svampegummi Sponge rubber

Material: NR, mørkegrå dark grey

Hardness: SH 16 – 20

Density: 0,4 – 0,5



Varenr. Item no.		A x B
36.0505	*	5 x 5 mm
36.0806	*	8 x 6 mm
36.1005		10 x 5 mm
36.1005G lysegrå light grey	*	10 x 5 mm
36.1007	*	10 x 7 mm
36.1008	*	10 x 8 mm
36.1010 sort black	*	10 x 10 mm
36.1205	*	12 x 5 mm
36.1206	*	12 x 6 mm
36.1210	*	12 x 10 mm
36.1503	*	15 x 3 mm
36.1510	*	15 x 10 mm
36.1512	*	15 x 12 mm
36.1515	*	15 x 15 mm
36.1604	*	16 x 4 mm


Varenr. Item no.		A x B
36.1605	*	16 x 5 mm
36.1808G	*	18 x 8 mm
36.1816	*	18 x 16 mm
36.2002	*	20 x 2 mm
36.2003	*	20 x 3 mm
36.2005	*	20 x 5 mm
36.2010		20 x 10 mm
36.2020		20 x 20 mm
36.2503	*	25 x 3 mm
36.2505	*	25 x 5 mm
36.2510	*	25 x 10 mm
36.2515	*	25 x 15 mm
36.2520	*	25 x 20 mm
36.3003	*	30 x 3 mm

Varenr. Item no.		A x B
36.3005	*	30 x 5 mm
36.3010		30 x 10 mm
36.3020	*	30 x 20 mm
36.3030	*	30 x 30 mm
36.3515		35 x 15 mm
36.3516	*	35 x 16 mm
36.4010	*	40 x 10 mm
36.4012	*	40 x 12 mm
36.4015	*	40 x 15 mm
36.4025	*	40 x 25 mm
36.5010	*	50 x 10 mm
36.5020	*	50 x 20 mm
36.5025	*	50 x 25 mm
36.5030	*	50 x 30 mm

Material: CR, sort black


Hardness: SH 18 – 25

Density: 0,5 – 0,75



Varenr. Item no.		A x B
36.1010CR	*	10 x 10 mm
36.2010CR	*	20 x 10 mm
36.2020CR	*	20 x 20 mm
36.3015CR	*	30 x 15 mm
36.64004CR	*	40 x 4 mm
36.4020CR	*	40 x 20 mm
36.60503CR	*	50 x 3 mm
36.5005CR	*	50 x 5 mm

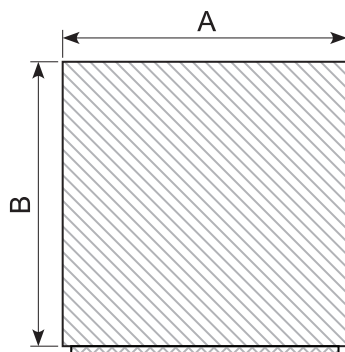Silikonesvampegummi *Silicone sponge rubber*



Industry quality: -60°C / +220°C
Med klæb With Adhesive: -60°C / +180°C
Material: Silicone, råhvid off white
Hardness: SH 16 - 20
Density: 0,4 - 0,5
F: FDA
K: Med klæb With adhesive

Varenr. Item no.		A x B
36.1010SIH	*	10 x 10 mm
36.1512SIH	*	15 x 12 mm
36.1515SIH	*	15 x 15 mm
36.1610SIH		16 x 10 mm
36.2003SIH	*	20 x 3 mm
36.2005SIH	*	20 x 5 mm
36.2005SIHK	*	20 x 5 mm
36.2010SIH	*	20 x 10 mm
36.2010SIHK	*	20 x 10 mm
36.2015SIH	*	20 x 15 mm
36.2020SIH	*	20 x 20 mm
36.2020SIHF	*	20 x 20 mm
36.2505SIHF	*	25 x 5 mm
36.2510SIH		25 x 10 mm
36.2515SIH	*	25 x 15 mm
36.2520SIH		25 x 20 mm
36.3005SIHK	*	30 x 5 mm
36.3020SIH	*	30 x 20 mm
36.4005SIHK	*	40 x 5 mm
36.4012SIH	*	40 x 12 mm

Industry quality: -60°C / +200°C
Material: Silicone, hvid white
Hardness: SH 16 - 20
Density: 0,55 - 0,65

I overensstemmelse med (E6) 1935/2004
og EU 10/2011 i kontakt med fødevarer
Compliant to (E6) 1935/2004 and EU
10/2011 in contact with food

F: FDA
**K: Med klæb. Disse kan ikke
anvendes i kontakt med fødevarer**
With adhesive. These can not be used
in contact with food

Varenr. Item no.		A x B
36.1204SIHKF		12 x 4 mm
36.1505SIHF	*	15 x 5 mm
36.1616SIHF	*	16 x 16 mm
36.2005SIHF	*	20 x 5 mm
36.3005SIHKF	*	30 x 5 mm
36.3055SIHKF		30 x 5 mm
36.5020SIHKF		50 x 5 mm
36.1010SIHKF		10 x 10 mm
36.1515SIHKF		15 x 15 mm
36.4008SIHKF	*	40 x 8 mm
36.4025SIHKF	*	40 x 25 mm

Industry quality: -60°C / +200°C
Material: Silicone, hvid white
Hardness: SH 16 - 20
Density: 0,55 - 0,65

Varenr. Item no.		A x B
36.1006SIH	*	10 x 6 mm
36.1212SIH		12 x 12 mm
36.1505SIH	*	15 x 5 mm
36.2525SIH	*	25 x 25 mm
36.3010SIH	*	30 x 10 mm
36.5005SIH	*	50 x 5 mm


Svampegummiplader *Sponge rubber plates*

Density: 0,6

Color: Mørkegrå *Dark grey*

Size: 1x1m

















Varenr. Item no.	Tykkelse Thickness	Materiale Material
38.152EPDM	2 mm	EPDM
38.153EPDM	3 mm	EPDM
38.154EPDM	4 mm	EPDM
38.155EPDM	5 mm	EPDM
38.156EPDM	6 mm	EPDM
38.158EPDM	8 mm	EPDM
38.160EPDM	10 mm	EPDM
38.162EPDM	12 mm	EPDM
38.165EPDM	15 mm	EPDM
38.170EPDM	20 mm	EPDM
38.175EPDM	25 mm	EPDM
38.180NR	30 mm	NR













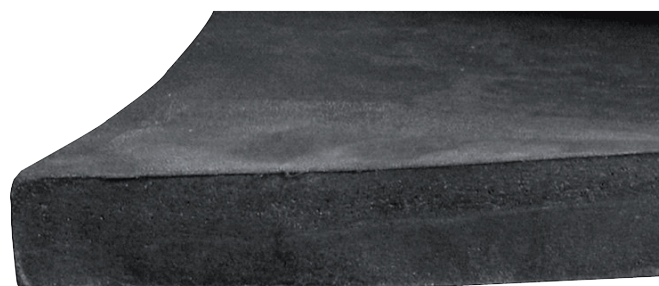














Mange svampegummiplader vil udgå pga. min. ordre 50 stk. Se evt. cellegummiplader om alternativ
Many sponge rubber sheets will be discontinued due to min. order 50 pcs. See cellular rubber sheets for alternative

Svampegummi med svøb *Sponge rubber with shell*

36.K608	36.K613	36.K616	36.K671
Color: Black	Color: Black	Color: Black	Color: Black
36.K675	36.K676	36.K677	36.K678
Color: Black	Color: Black	Color: Black	Color: Black

36.K679 *  Color: Black	36.K680 *  Color: Black	36.K681 *  Color: Black	36.K683 *  Color: Black
36.K695 *  Color: Black	36.K697 *  Color: Black	36.K698 *  Color: Black	36.K852 *  Color: Black
36.K853 *  Color: Black	36.3351 *  Material: EPDM, black Hardness: SH 14 - 16 Density: 0,38 - 0,4 Min. order: 100 m	36.3354 *  Material: NR, dark grey Hardness: SH 16-20 Density: 0,4 Min. order: 1.000 m	36.3813  Material: EPDM, dark grey Hardness: SH 16-20 Density: 0,4 - 0,45
36.B380  Material: EPDM Length: 3 m	36.3315  Material: EPDM, black Hardness: SH 18 - 20 Density: 0,45 - 0,55	36.3504  Material: EPDM, dark grey Hardness: SH 14 - 16 Density: 0,38 - 0,42	36.3881 / 36.3881S *  Material: EPDM, grey/black Hardness: SH 16 - 20 Density: 0,4 - 0,5 36.3881S * : Black

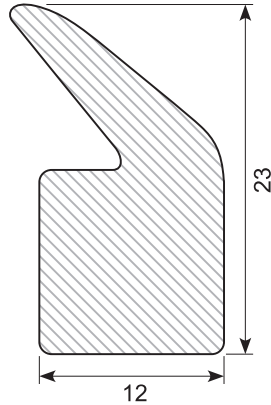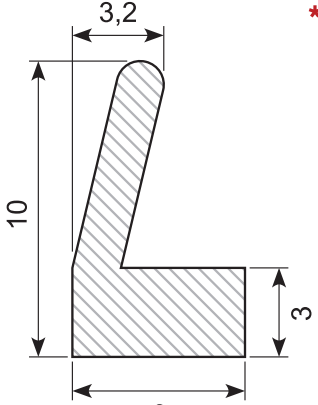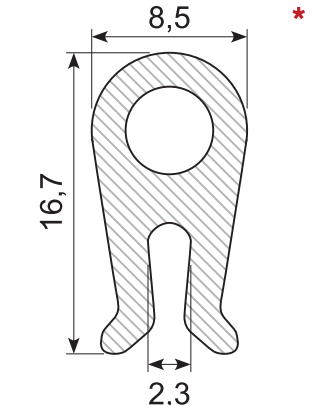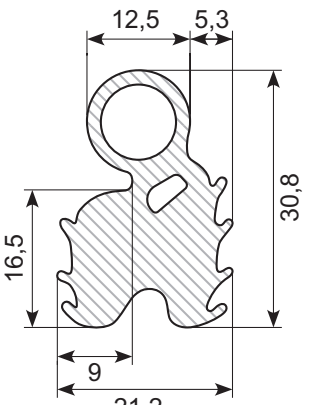36.14044 *  Material: EPDM Min. order: 500 m	36.3704  Material: NR, dark grey Hardness: SH 20 - 25 Density: 0,55 - 0,65	30.13144XX  Material: Sponge EPDM Med klæb With adhesive	36.3882  Material: CR, black
36.3897 *  Material: EPDM, light grey	36.13315 *  Material: EPDM Density: 0,7 With adhesive Min. order: 1.000 m	36.15387  Material: EPDM, sort Density: 0,65 Svampegummiprofil med klæb.	
30.9884S *  Material: EPDM Min. order: 3.000 m	30.E368  Material: EPDM, black		
36.730805H  Material: EPDM, white Density: 0,25 - 0,40 Med klæb With adhesive Min. order: 21.600 m	36.9086S  Material: EPDM, black Density: 0,35 Med klæb With adhesive	36.730808 *  Material: EPDM, black Density: 0,25 - 0,35 Med klæb With adhesive Min. order: 21.600 m	36.9088S  Material: EPDM, black Density: 0,35 Med klæb With adhesive





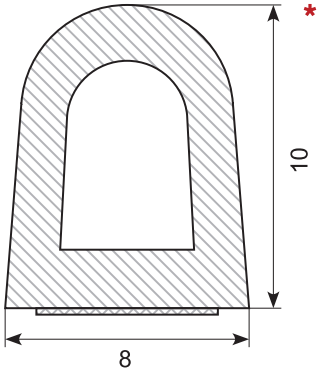
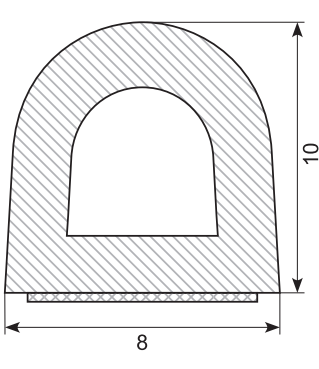










36.730810  Material: EPDM, black Density: 0,35 - 0,45 With adhesive	36.90810  Material: EPDM, black Density: 0,35 - 0,45 With adhesive	36.730906 / 36.730906H*  Material: EPDM, black/white Density: 0,25 - 0,35 With adhesive 36.730906H, white Min. order: 4.800 m	36.730907 / 36.730907G / 36.730907H  Material: EPDM, black / light grey / white Density: 0,25 - 0,35 With adhesive
36.730955  Material: EPDM, black Density: 0,25 - 0,35 With adhesive	36.730955G/36.730955H/36.730955B  Material: EPDM, 36.730955G: Grey 36.730955H: White 36.730955B*: Brown Density: 0,25 - 0,35	36.80955S  Material: EPDM, black Density: 0,35 With adhesive	36.740907H*  Material: EPDM, white Density: 0,35 - 0,45 With adhesive Min. order: 21.600 m
36.731210 / 36.731210H  Material: EPDM, black / white Density: 0,25 - 0,35 With adhesive	36.731412D  Material: EPDM, black Density: 0,25 - 0,35 With adhesive	36.732115  Material: EPDM, black Density: 0,45 - 0,55 With adhesive	36.92117  Material: EPDM, black Density: 0,35 With adhesive

Skafevarer – Svampegummiprofiler

Special order – Sponge rubber profiles


Vi kan skaffe mange svampegummiprofiler i forskellige udformninger. Herunder ser du et lille udvalg og i vores produktoversigt kan du finde endnu flere muligheder. Find produktoversigt på vores hjemmeside eller ved at scanne QR-koden.
Pris og varenummer på forespørgsel.

We can supply many sponge rubber profiles in different shapes. Below you can see a small selection and in our product overview you can find even more options. Find the product overview on our website or by scanning the QR code.
Price and item number on request.

36.720802  Material: EPDM, black Density: 0,35 - 0,45 <i>With adhesive</i>	36.720803  Material: EPDM, black Density: 0,35 - 0,45 <i>With adhesive</i>	36.720904  Material: EPDM, black Density: 0,35 - 0,45 <i>With adhesive</i>	36.720903  Material: EPDM, black Density: 0,35 - 0,45 <i>With adhesive</i>
36.721004  Material: EPDM, black Density: 0,35 - 0,45 <i>With adhesive</i>	36.721004-6  Material: EPDM, black Density: 0,35 - 0,45 Med smal 6 mm klæb <i>With narrow 6 mm adhesive</i>	36.721006  Material: EPDM, black Density: 0,35 - 0,45 <i>With adhesive</i>	36.721005  Material: EPDM, black Density: 0,35 - 0,45 <i>With adhesive</i>
36.721202  Material: EPDM, black Density: 0,35 - 0,45 <i>With adhesive</i>	36.721203  Material: EPDM, black Density: 0,35 - 0,45 <i>With adhesive</i>	36.7213564  Material: EPDM, black Density: 0,35 - 0,45 <i>With adhesive</i>	36.721503  Material: EPDM, black Density: 0,35 - 0,45 <i>With adhesive</i>
36.721504  Material: EPDM, black Density: 0,35 - 0,45 <i>With adhesive</i>	36.721508  Material: EPDM, black Density: 0,35 - 0,45 <i>With adhesive</i>	36.721508B  Material: EPDM, black Density: 0,25 - 0,35 <i>With adhesive</i>	36.722004  Material: EPDM, black Density: 0,35 - 0,45 <i>With adhesive</i>

Sicocell


Material: EPDM, sort *black*
Density: 0,12 (120 ± 20 kg/m³)
 Med klæb *With adhesive*



Varenr. Item no.	A x B	Varenr. Item no.	A x B	Varenr. Item no.	A x B	Varenr. Item no.	A x B
36.60403 *	4 x 3 mm	36.61008	10 x 8 mm	36.61603	16 x 3 mm	36.63005	30 x 5 mm
36.60502 *	5 x 2 mm	36.61010	10 x 10 mm	36.61710	17 x 10 mm	36.63010	30 x 10 mm
36.60503	5 x 3 mm	36.61203	12 x 3 mm	36.61808 *	18 x 8 mm	36.63012	30 x 12 mm
36.60505	5 x 5 mm	36.61204 *	12 x 4 mm	36.62002	20 x 2 mm	36.64003	40 x 3 mm
36.60605 *	6 x 5 mm	36.61205 *	12 x 5 mm	36.62003	20 x 3 mm	36.64005	40 x 5 mm
36.60802	8 x 2 mm	36.61310	13 x 10 mm	36.62004	20 x 4 mm	36.64010	40 x 10 mm
36.60803	8 x 3 mm	36.61502 *	15 x 2 mm	36.62005	20 x 5 mm	36.64015	40 x 15 mm
36.60804	8 x 4 mm	36.61503	15 x 3 mm	36.62008	20 x 8 mm	36.64020	40 x 20 mm
36.60805 *	8 x 5 mm	36.61505	15 x 5 mm	36.62010	20 x 10 mm	36.65003	50 x 3 mm
36.60808	8 x 8 mm	36.61506	15 x 6 mm	36.62020	20 x 20 mm	36.65005	65 x 5 mm
36.61001	10 x 1 mm	36.61508	15 x 8 mm	36.62305 *	23 x 5 mm	36.66003	66 x 3 mm
36.61002	10 x 2 mm	36.61510	15 x 10 mm	36.62502	25 x 2 mm	36.65005	65 x 5 mm
36.61003	10 x 3 mm	36.61512	15 x 12 mm	36.62506	25 x 6 mm	36.65010	50 x 10 mm
36.61004	10 x 4 mm	36.61518	15 x 18 mm	36.62510	25 x 10 mm	36.66002	60 x 2 mm
36.61005	10 x 5 mm	36.61530 *	15 x 30 mm	36.62525 *	25 x 25 mm	36.66004 *	60 x 4 mm
				36.64008	40 x 8 mm	36.66004X *	60 x 4 mm
						36.67502 *	75 x 2 mm

Sicocell

Material:
 - CR: med standardklæb with standard adhesive
 - CR-5952: tape uden glasfibertape without glassfiber
Density: 0,17 (175 ± 25 kg/m³)



Varenr. Item no.	A x B	Varenr. Item no.	A x B	Varenr. Item no.	A x B
36.60802CR	8 x 2 mm	36.62002CR *	20 x 2 mm	36.63204CR *	32 x 4 mm
36.60804CR	8 x 4 mm	36.62004CR *	20 x 4 mm	36.64004CR *	40 x 4 mm
36.60808CR *	8 x 8 mm	36.2005CR *	20 x 5 mm	36.64005CR *	40 x 5 mm
36.61003CR	10 x 3 mm	36.2502CR *	25 x 2 mm	36.65005CR *	50 x 5 mm
36.61010CR *	10 x 10 mm	36.62505CR *	25 x 5 mm	36.65005CR-5952 *	50 x 5 mm
36.61609CR *	16 x 9 mm	36.63005CR-5952 *	30 x 5 mm	36.65007CR *	50 x 7 mm
		36.63030CR *	30 x 30 mm	36.68005CR *	80 x 5 mm
				36.68005CR-5952 *	80 x 5 mm

Cellegummiplade Cellular rubber plates

Uden klæb *No adhesive*
Material: EPDM, sort *black*
Density: 0,12

Varenr. Item no.	Tykkelse Thickness	Vidde Width	Længde Length
38.27700002	2 mm	1.000 mm	20.000 mm
38.27700003	3 mm	1.000 mm	20.000 mm
38.27700004	4 mm	1.000 mm	20.000 mm
38.27700005	5 mm	1.000 mm	20.000 mm
38.27700006	6 mm	1.000 mm	20.000 mm
38.27700008	8 mm	1.000 mm	20.000 mm
38.27700010	10 mm	1.000 mm	20.000 mm
38.27700015	15 mm	1.000 mm	10.000 mm
38.27700020	20 mm	1.000 mm	10.000 mm
38.27700025	25 mm	1.000 mm	2.000 mm
38.188 *	40 mm	1.000 mm	2.000 mm
38.189 *	50 mm	1.000 mm	2.000 mm

Cellegummiplade Cellular rubber plates

















Med klæb *With adhesive*
Material: EPDM, sort *black*















Varenr. Item no.	Tykkelse Thickness	Vidde Width	Længde Length
38.160E/K *	1.000 mm	10 mm	2.000 mm
38.170E/K *	1.000 mm	20 mm	2.000 mm
38.175E/K *	1.000 mm	25 mm	2.000 mm










Cellegummiplade Cellular rubber plates























Material: CR, sort *black*



























Varenr. Item no.	Tykkelse Thickness	Vidde Width	Længde Length
38.190 *	1.000 mm	10 mm	1.400 mm
38.191 *	1.000 mm	15 mm	1.400 mm






34.601* / 34.601G*  Material: PVC, black Min. order: 5 m 34.601G: Grey Min. order: 50–500 m	34.602 / 34.602G*  Material: PVC, black Min. order: 5 m 34.602G*: Grey Min. order: 50 m	34.603 / 34.603G  Material: PVC, black 34.603G: Grey	34.604  Material: PVC, black Min. order: 5 m
34.7102–50  Material: PVC, black Min. order: 5 m	34.614  Material: PVC, black Min. order: 50 m	34.3032  Material: PVC, black Min. order: 51 m	34.641  Material: PVC, black Min. order: 50 m
34.643  Material: PVC, black	34.644  Material: PVC, black Min. order: 50 m	34.620010X  Material: PVC, black	34.620040X  Material: PVC, black
34.613  Material: PVC, black	34.7196  Material: PVC, black	34.7199  Material: PVC, black Min. order: 25 m	34.620210  Material: PVC, black





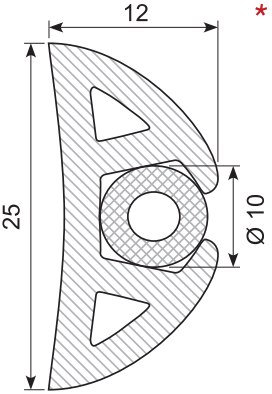
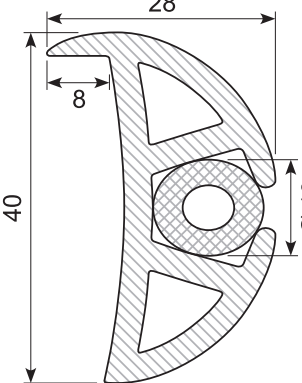

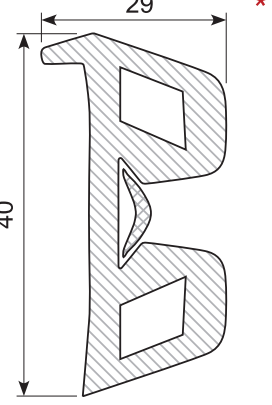
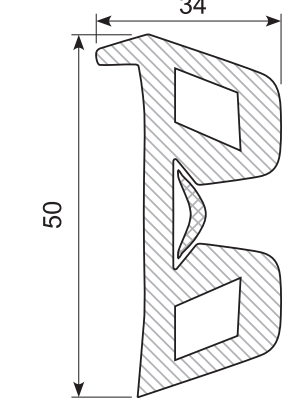
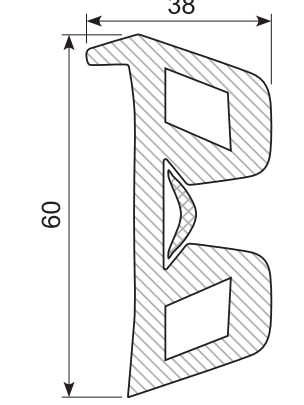
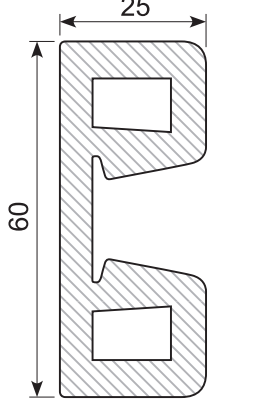
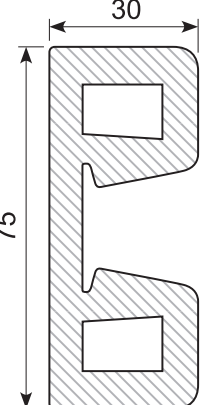
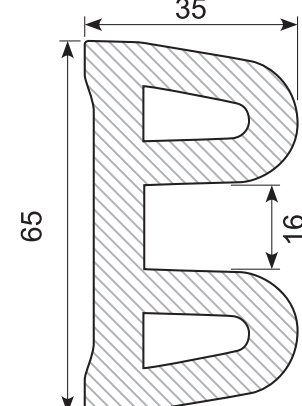
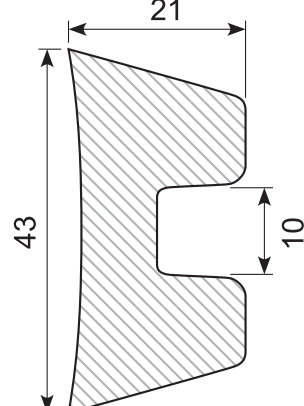


34.620140 *  Material: PVC, black Min. order: 5 m	34.3011 *  Material: PVC, black	34.62039 *  Material: PVC, black Min. order: 5 m	
34.620420  Material: PVC, black	34.62041  Material: PVC, black	34.624 *  Material: PVC, black Min. order: 50 m	
34.625  Material: PVC, black	34.626  Material: PVC, black	34.636  Material: PVC, black	34.637 *  Material: PVC, black Min. order: 50 m
34.3020  Material: PVC, black	34.7514 *  Material: PVC, black Min. order: 5 m	34.62610S  Material: PVC, black	34.62713H  Material: PVC, white

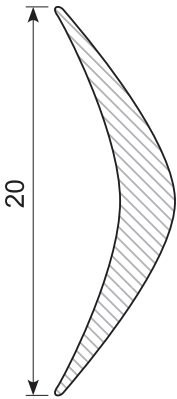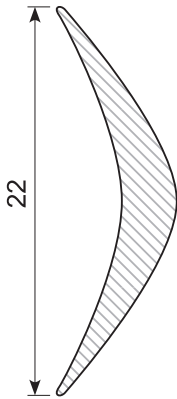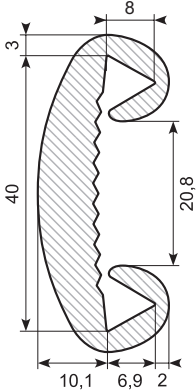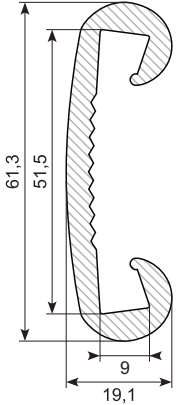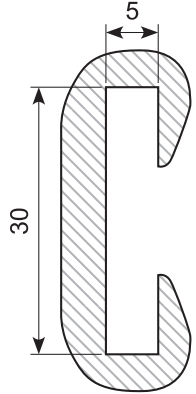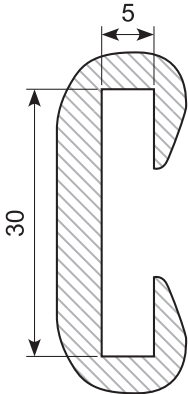34.62713S *  Material: PVC, black	34.677  Material: PVC, white Min. order: 50 m	34.678 *  Material: PVC, white Min. order: 50 m	34.608X  Material: PVC, black
34.609X  Material: PVC, black	34.606 *  Material: PVC, black Min. order: 100 m	34.606X *  Material: PVC, black Min. order: 500 m	34.607  Material: PVC, black
34.607X *  Material: PVC, black Min. order: 500 m			

45.206AL   Material: PVC Length: 2 m <i>With adhesive</i>	45.224   Material: PVC, white Length: 25 m <i>With adhesive</i>	45.217C *   Material: PVC, chrome Length: 5 m <i>With adhesive</i>	45.221C *   Material: PVC, chrome Length: 5 m <i>With adhesive</i>
45.347C *   Material: PVC, chrome Length: 5 m <i>With adhesive</i>	45.884C *   Material: PVC, chrome Length: 5 m <i>With adhesive</i>	45.383C *   Material: PVC, chrome Length: 5 m <i>With adhesive</i>	45.388C *   Material: PVC, chrome Length: 5 m <i>With adhesive</i>
45.705C *   Material: PVC, chrome Length: 5 m <i>With adhesive</i>	45.832   Material: PVC Length: 25 m <i>With adhesive</i>	45.836   Material: PVC Length: 25 m <i>With adhesive</i>	45.837 *   Material: PVC Length: 25 m Hardness: SH 74 - 76 Density: 1,32 <i>With adhesive</i>
45.839 *   Material: PVC Length: 25 m <i>With adhesive</i> Min. order: 300 m	45.872   Material: PVC Length: 25 m <i>With adhesive</i>	45.874   Material: PVC Length: 25 m <i>With adhesive</i>	45.882   Material: PVC Length: 50 m <i>With adhesive</i>






45.886 / 45.886G   Material: PVC, black Length: 25 m <i>With adhesive</i> 45.886G: Grey	45.894   Material: PVC Length: 25 m <i>With adhesive</i> Min. order: 300 m	45.980A   Material: PVC, chrome Length: 25 m <i>With adhesive</i> Min. order: 500 m	45.980K   Material: PVC Length: 340 mm <i>With adhesive</i> Example fix lengths Min. order: 1.400 pcs.
45.980S   Length: 25 m Min. order: 500 m	45.102G   Length: 25 m For LED lysstrips <i>For LED light strips</i>	45.308C / 45.308C-50   Material: PVC, chrome Length: 5 m 45.308C-50: 50 m Min. order: 300 m	45.309C / 45.309C-50   Material: PVC, chrome Length: 5 m 45.309C-50: 50 m Min. order: 300 m
45.216C-50   Material: PVC, chrome Length: 50 m Min. order: 300 m	45.123   Material: PVC Length: 25 m Med klæb <i>With adhesive</i> Min. order: 300 m	45.393   Material: PVC Length: 25 m Med klæb <i>With adhesive</i> Min. order: 300 m	45.394   Material: PVC Length: 25 m Med klæb <i>With adhesive</i> Min. order: 300 m
45.901   Rende Gutter Material: PVC Length: 25 m <i>With adhesive</i> Min. order: 300 m	45.2031024   PVC universal hjulkassepanel <i>PVC universal wheel arch panel</i> Length: 1,5 m Set of 4 pcs. <i>With adhesive</i>	45.20511046   PVC universal hjulkassepanel <i>PVC universal wheel arch panel</i> Color: Black Length: 6 m Coil <i>With adhesive</i>	45.20511091   PVC universal hjulkassepanel <i>PVC universal wheel arch panel</i> Length: 1,5 m Set of 4 pcs. <i>With adhesive</i>

45.2051445 *  PVC universal hjulkassepanel PVC universal wheel arch panel Length: 12,5 m Coil With adhesive	45.235N1057 *  PVC universal hjulkassepanel PVC universal wheel arch panel Color: Black Length: 6 m Coil With adhesive	45.235N429 *  PVC universal hjulkassepanel PVC universal wheel arch panel Color: Black Length: 12,5 m Coil With adhesive	45.235NG1057 *  PVC universal hjulkassepanel PVC universal wheel arch panel Color: Grey/black Length: 6 m Coil With adhesive
45.235NG429 *  PVC universal hjulkassepanel PVC universal wheel arch panel Color: Grey/black Length: 12,5 m Coil With adhesive			

56.7001-007   Rubber stopper Grey - Ral 7035	39.171J / 39.171G   Color: Black 39.171G: Light grey	39.175J   Material: NR, black Hardness: SH 78	39.175H   Material: NR, white Min. order: 2.000 pcs.
39.167G   Grey rubber buffer Material: NR / SBR	39.168G   Grey rubber buffer Material: NR / SBR	39.169G   Grey rubber buffer Material: NR / SBR	39.170G   Grey rubber buffer Material: NR / SBR
39.174  	39.177  	39.178  	39.179  
39.632J   Oval rubber buffer, black	39.632A   Material: NR / SBR, black	39.632B   Material: NR / SBR, black	39.632C   Material: NR / SBR, black

39.172 Material: NR / SBR, black	39.173 Material: NR / SBR, black	39.626J Material: NR, black Hardness: SH 85	39.637 Material: NR / SBR, black
39.625 Material: NR / SBR, black	39.624 Material: NR / SBR, black	39.623J Let konisk Slightly conical Material: NR, black	39.620J Med skiver With washers Material: NR, black Hardness: SH 85
39.638 Material: NR / SBR, black	39.181061 Material: NR / SBR, black Weight: 1.050 g	39.181052 Material: NR / SBR, black Weight: 1.370 g	39.627 Material: SBR, black
39.181060 Material: NR / SBR, black Weight: 1.370 g	39.360 Material: NR / SBR, black	39.628 Material: NR / SBR, black	39.646 Material: NR / SBR, black Weight: 1.800 g

39.629 Material: NR/SBR, black	39.634 Med stålskiver og stålhus With steel washers and steel casing. 3 holes for 16 mm bolt Material: EPDM, black	39.630 Material: NR/SBR, black	39.634P Material: NR/SBR, black
39.647 Material: NR/SBR, black	39.650 Material: NR/SBR, black	39.631X Material: SBR, black Hardness: SH 66	39.651A / 39.651 Material: NR/SBR 39.651: SBR & rayon
39.652 Material: NR/SBR, black	39.653 Material: NR/SBR, black	39.644 / 39.644A * Material: SBR & rayon 39.644A *: NR/SBR	39.631A Material: NR/SBR
39.648 Material: NR/SBR, black	39.649 Material: NR/SBR, black	39.642X / 39.642 Material: NR/SBR (Economy) 39.642: SBR & rayon	39.643X Material: NR/SBR (Economy)

39.635X	39.635	39.636X	39.636
			
			
Vulkaniseret nyt gummi Vulcanized new rubber	Vulkaniseret nyt gummi Vulcanized new rubber	Vulkaniseret nyt gummi Vulcanized new rubber	Vulkaniseret nyt gummi Vulcanized new rubber

Anslagsbuffere Tipper pads

Material: Stål / gummi Steel / rubber



Varenr. Item no.	Størrelse stålelement Size steel element	Størrelse gummielement Size rubber element	Vægt Weight
39.658	150 x 40 x 5 mm	100 x 40 x 25 mm	0,34 kg
39.656	152 x 88 x 6 mm	100 x 86 x 22 mm	0,75 kg
39.657	355 x 75 x 3 mm	290 x 74 x 27 mm	1,35 kg



Anslagsbuffere Tipper pads



Material: Stål / gummi Steel / rubber



Varenr. Item no.	Størrelse stålelement Size steel element	Størrelse gummielement Size rubber element	Vægt Weight
39.659 *	152 x 88 x 5 mm	100 x 86 x 23 mm	0,41 kg
39.660 *	152 x 88 x 5 mm	100 x 88 x 38 mm	0,6 kg
39.661 *	180 x 75 x 5 mm	115 x 75 x 29 mm	0,41 kg
39.662 *	180 x 75 x 5 mm	150 x 75 x 40 mm	0,6 kg
39.663 *	180 x 75 x 4 mm	115 x 75 x 46 mm	0,6 kg
39.664 *	190 x 115 x 6 mm	120 x 112 x 14 - 20 mm	0,6 kg
39.665 *	355 x 75 x 5 mm	290 x 75 x 39 mm	1,4 kg



39.180	39.181	39.182	39.183
			
Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Size: Ø120 x H 26 mm Internal: Ø108 mm Material: SBR, black Hardness: SH 80	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Size: Ø120 x H 26 mm Internal: Ø108 mm Material: SBR, black Hardness: SH 75	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Size: Ø145 x H 24 mm Internal: Ø120 mm Material: SBR, black Hardness: SH 75	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Size: Ø145 x H 26 mm Internal: Ø135 mm Material: TPE, black Hardness: SH 80
39.183A	39.183B	39.183C	39.188
			
Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: SBR, black Size: Ø100 x H 21 mm Internal: Ø80 mm Hardness: SH 80	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: SBR, black Size: Ø140 x H 25 mm Internal: Ø103 mm Hardness: SH 80	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: Black Size: Ø140 x H 25 mm Internal: Ø74 / 60 mm Hardness: SH 80	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: SBR, black Size: Ø160 x H 28 mm Internal: Ø135 mm Hardness: SH 75
39.184	39.185	39.186	39.187
			
Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: SBR, black Hardness: SH 75 Size: 160 x 120 x 20 mm	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: SBR, black Hardness: SH 75 Size: 160 x 120 x 35 mm	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: SBR, black Hardness: SH 75 Size: 160 x 120 x 120 mm	Gummipude til liftstabilisatorer <i>Rubber pad for lift stabilizers</i> Material: SBR, black Hardness: SH 75 Size: 180 x 60 x 100 mm

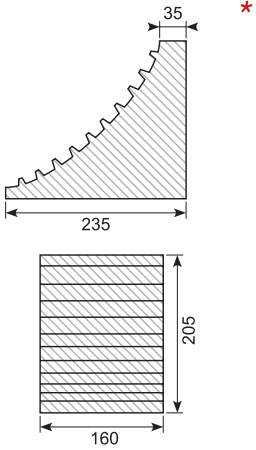39.M24	52.CWC8		
 M24-skive til gummibuffer M24 washer for rubber buffer	 Stopklods Stop block		

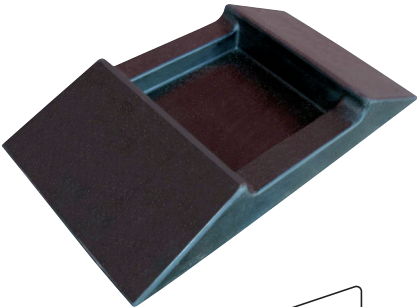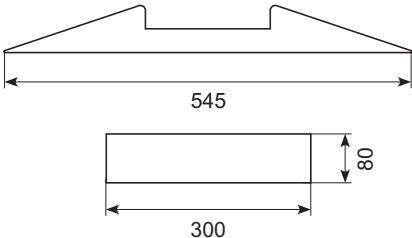39.645			
Stopper for palleløfter <i>Stopper for pallet jack</i> Material: NBR / SBR Weight: 5,8 kg  			

TYPE M

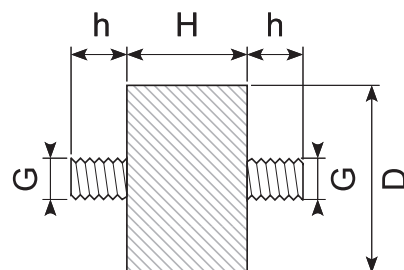Flere størrelser kan skaffes på bestilling
More sizes available on request





Varenr. Item no.	Hårdhed Hardness	D	H	h	G	Bemærk Note
39.M9/12-43	SH 43	9	12	8	M4	
39.M10/10	SH 57	10	10	10	M4	
39.M15/15	SH 57	15	15	10	M4	
39.M1810	SH 55	18	10	12	M6	
39.M20/8-M6	SH 55	20	8	18	M6	
39.M20/10-M6	SH 55	20	10	18	M6	
39.M20/10	SH 55	20	10	18	M8	
39.M2015	SH 55	20	15	18	M6	
39.M20/15-A4	SH 55	20	15	18	M6	A4: Rustfri Stainless
39.M2020-M6-45	SH 43	20	20	15	M6	
39.M20/20-A2	SH 55	20	20	18	M6	A2: Rustfri Stainless
39.M2020	SH 55	20	20	18	M6	
39.M2020-M8	SH 55	20	20	18	M8	
39.M25/10-M6ESD	SH 55	25	10	18	M6	ESD
39.M25/10-M8	SH 55	25	10	10	M8	
39.M25/10-M8x10/20	SH 55	25	10	10 / 20	M8	
39.M2515	SH 55	25	15	18	M6	
39.M2515-55	SH 55	25	15	18	M8	
39.M2520-M6	SH 55	25	20	18	M6	
39.M2520	SH 55	25	20	18	M8	
39.M25/22	SH 55	25	22	10	M8	
39.M30/10	SH 55	30	10	23	M8	
39.M3015-M8x15	SH 55	30	15	15	M8	
39.M3015	SH 55	30	15	23	M8	
39.M30/20XX	SH 68	30	20	6 / 12	M8	
39.M3020-55	SH 55	30	20	23	M8	
39.M3020	SH 65	30	20	23	M8	
39.M3030-SS	SH 57	30	30	10	M8	A2: Rustfri Stainless
39.M3030	SH 55	30	30	23	M8	
39.M40/20	SH 55	40	20	23	M8	
39.M4025	SH 55	40	25	23	M8	
39.M4030	SH 55	40	30	23	M8	
39.M4038	SH 55	40	38	23	M8	
39.M40/38-M12	SH 55	40	38	23	M12	
39.M40/40	SH 55	40	40	28	M10	
39.M40/40-A2	SH 55	40	40	28	M10	A2: Rustfri Stainless
39.M40/50-A2	SH 43	40	50	33 / 23	M10	A2: Rustfri Stainless
39.M50/20-M10X	SH 55	50	20	12 / 20	M10	
39.M50/20NBR	SH 55	50	20	33	M10	
39.M5025	SH 55	50	25	28	M10	
39.M50/30-A2	SH 55	50	30	28	M10	
39.M5030	SH 55	50	30	33	M10	
39.M50/30NBR	SH 55	50	30	33	M10	
39.M5040	SH 55	50	40	25	M12	
39.M5045	SH 65	50	45	27	M10	
39.M5050	SH 55	50	50	28	M10	
39.M6035	SH 55	60	35	25	M12	
39.M6050	SH 55	60	50	28	M10	
39.M7540	SH 55	75	40	37	M12	
39.M7550	SH 55	75	50	37	M12	
39.M7560	SH 55	75	60	33	M12	
39.M8050	SH 55	80	50	37	M12	
39.M100/50NBR	SH 55	100	50	41	M16	
39.M100/55-40	SH 40	100	55	42	M14	

TYPE B

Flere størrelser kan
skaffes på bestilling

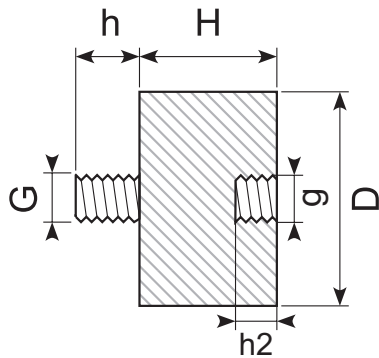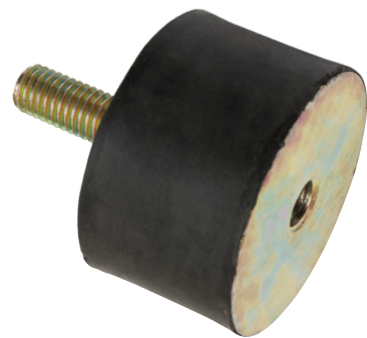More sizes available on request





Varenr. Item no.	Hårdhed Hardness	D	H	h	h2	G	g	Bemærk Note
39.B08/08-4M4-43	SL43	8	8	86	3	M4	M4	
39.B08/08-43	SH 43	8	8	6	3	M3	M3	
39.B10/10	SH 57	10	10	10	4	M4	M4	
39.B15/10	SH 57	15	10	8	5	M5	M5	
39.B15/15-M4x8	SH 57	15	15	8	4	M4	M4	
39.B15/15-M5x10	SH 60	15	15	10	5	M5	M5	
39.B15/15-R11	SH 60	15	15	10	5	M5	M5	R11
39.B15/15	SH 55	15	15	10	6	M6	M6	
39.B15/20	SH 55	15	20	10	6	M6	M6	
39.B16/18	SH 55	16	18	10	5	M5	M5	
39.B20/10-M6	SH 55	20	10	18	6	M6	M6	
39.B20/10	SH 55	20	10	18	8	M8	M8	
39.B20/15-M6-43	SH 43	20	15	10	6	M6	M6	
39.B20/15-M6	SH 57	20	15	10	6	M6	M6	
39.B20/15-A4	SH 55	20	15	18	6	M6	M6	
39.B20/15	SH 55	20	15	18	8	M8	M8	
39.B20/20-M6-43	SH 43	20	20	10	6	M6	M6	
39.B20/20-M6x15-43	SH 43	20	20	15	6	M6	M6	
39.B20/20-M6	SH 57	20	20	10	6	M6	M6	
39.B2020	SH 55	20	20	18	8	M8	M8	
39.B20/25-M6	SH 55	20	25	18	6	M6	M6	
39.B2513	SH 55	25	13	18	6	M6	M6	
39.B25/25-M6	SH 55	25	25	18	6	M6	M6	
39.B25/25	SH 55	25	25	18	8	M8	M8	
39.B25/30	SH 55	25	30	18	6	M6	M6	
39.B30/20-M6x10-43	SH 43	30	20	10	6	M6	M6	
39.B30/20-M6x10-57	SH 57	30	20	10	6	M6	M6	
39.B30/20XXX	SH 55	30	20	8	8	M8	M8	
39.B30/20XX	SH 68	30	20	12	8	M8	M8	
39.B30/20X	SH 55	30	20	20	8	M8	M8	
39.B30/20	SH 55	30	20	33	8	M8	M8	
39.B30/20NBR	SH 55	30	20	33	8	M8	M8	
39.B30/25-43	SH 43	30	25	15	8	M8	M8	
39.B30/30-M6	SH 55	30	30	20	6	M6	M6	
39.B30/30-M6-M8x23	SH 55	30	30	23	8	M8	M6	
39.B3030	SH 55	30	30	23	8	M8	M8	
39.B30/40	SH 55	30	40	20	8	M8	M8	
39.B40/20	SH 55	40	20	23	8	M8	M8	
39.B40/30-M8x10-43	SH 43	40	30	10	8	M8	M8	
39.B40/30	SH 55	40	30	23	8	M8	M8	
39.B40/35	SH 55	40	35	23	8	M8	M8	
39.B50/20-M8	SH 55	50	20	15	8	M8	M8	
39.B50/25	SH 55	50	25	28	10	M10	M10	
39.B50/30	SH 55	50	30	28	10	M10	M10	
39.B50/40-43	SH 43	50	40	10	10	M10	M10	
39.B50/40	SH 57	50	40	28	10	M10	M10	
39.B50/50-M10	SH 55	50	50	28	10	M10	M10	
39.B50/50	SH 55	50	50	28	12	M12	M12	
39.B60/30	SH 55	60	30	25	12	M12	M12	
39.B60/40	SH 68	60	40	25	12	M12	M12	
39.B60/45-A2	SH 55	60	45	23	12	M12	M12	A2: Rustfri Stainless
39.M60/50	SH 55	60	50	28	10	M10	M10	
39.B75/30	SH 55	75	30	25	12	M12	M12	
39.B75/40-M8x18X	SH 55	75	40	18	8	M8	M8	
39.B75/40-M10x18	SH 55	75	40	18	10	M10	M10	
39.B75/40	SH 55	75	40	25	12	M12	M12	
39.B75/40-M12x40	SH 55	75	40	40	12	M12	M12	
39.B75/50	SH 55	75	50	25	12	M12	M12	
39.B100/30	SH 55	100	30	46	16	M16	M16	
39.B100/40	SH 55	100	40	46	16	M16	M16	
39.B100/50	SH 55	100	50	46	16	M16	M16	
39.B100/75	SH 43	100	75	46	16	M16	M16	
39.B100/75-55	SH 55	100	75	46	16	M16	M16	
39.B100/120-120	SH 55	120	120	37	12	M2	M2	

TYPE C

Flere størrelser kan
skaffes på bestilling

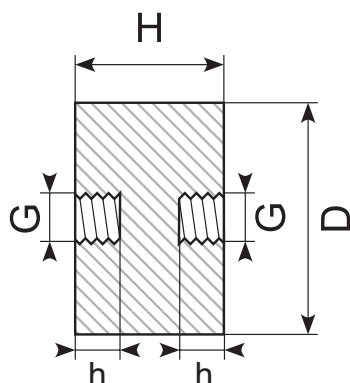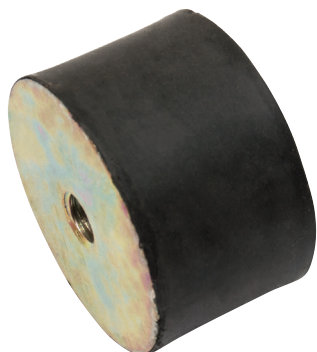
More sizes available on
request



Varenr. Item no.	Hårdhed Hardness	D	H	h	G	Bemærk Note
39.C20/10	SH 55	20	10	4	M4	
39.C20/15	SH 57	20	15	6	M6	
39.C20/20	SH 55	20	20	6	M6	
39.C20/20-A4	SH 55	20	20	6	M6	A4: Syrefast Acid proof
39.C20/25-VMQ	SH 55	20	25	4	M4	Transparent silikone, A4: Syrefast Acid proof
39.C25/10	SH 55	25	10	4	M4	
39.C25/15	SH 55	25	15	6	M6	
39.C25/15-A2	SH 55	25	15	6	M6	A2: Rustfri Stainless
39.C25/25	SH 55	25	25	6	M6	
39.C25/25-M8	SH 55	25	25	8	M8	
39.C30/15	SH 55	30	15	8	M8	Åben indsats Open insert
39.C30/20	SH 55	30	20	8	M8	
39.C30/22	SH 55	30	22	8	M8	
39.C30/30-A4	SH 57	30	30	8	M8	A4: Syrefast Acid proof
39.C30/30	SH 65	30	30	8	M8	
39.C30/40	SH 55	30	40	8	M8	
39.C40/20	SH 55	40	20	8	M8	
39.C40/25	SH 55	40	25	8	M8	
39.C40/30	SH 55	40	30	8	M8	
39.C40/40	SH 55	40	40	8	M8	
39.C40/40-M10	SH 55	40	40	10	M10	
39.C40/50	SH 55	40	50	8	M8	
39.C40/50-68	SH 68	40	50	8	M8	
39.C50/20	SH 55	50	20	10	M10	
39.C50/25	SH 55	50	25	10	M10	
39.C50/30-M8	SH 55	50	30	8	M8	
39.C50/30	SH 55	50	30	10	M10	
39.C50/30-A2	SH 57	50	30	10	M10	A2: Rustfri Stainless
39.C50/30-68	SH 68	50	30	10	M10	
39.C50/35-43	SH 43	50	35	10	M10	
39.C50/35	SH 55	50	35	10	M10	
39.C50/40	SH 55	50	40	10	M10	
39.C50/40-M12	SH 55	50	40	12	M12	
39.C50/45	SH 55	50	45	10	M10	
39.C50/50	SH 57	50	50	10	M10	
39.C60/30-M8	SH 55	60	30	8	M8	
39.C60/30	SH 55	60	30	10	M10	
39.C60/40-M10	SH 43	60	40	10	M10	
39.C60/40-M12	SH 43	60	40	12	M12	
39.C60/40	SH 65	60	40	12	M12	
39.C60/45	SH 65	60	45	10	M10	
39.C65/35-M10	SH 55	65	35	10	M10	
39.C65/35	SH 55	65	35	12	M12	
39.C70/45-M10	SH 55	70	45	10	M10	
39.C70/50-A2	SH 55	70	50	12	M12	A2: Rustfri Stainless
39.C75/30-M10	SH 55	75	30	10	M10	
39.C75/30-M10-68	SH 68	75	30	10	M10	
39.C75/30	SH 55	75	30	12	M12	
39.C75/50	SH 57	75	50	12	M12	
39.C75/55-M10	SH 55	75	55	10	M10	
39.C75/55-43A	SH 43	75	55	12	M12	
39.C75/55	SH 55	75	55	12	M12	
39.C100/40	SH 65	100	40	16	M16	
39.C100/50	SH 55	100	50	16	M16	
39.C100/55NBR68	SH 68	100	55	16	M16	
39.C100/60-M12	SH 55	100	60	12	M12	
39.C100/75	SH 55	100	75	16	M16	
39.C150/40	SH 65	150	40	16	M16	
39.C150/75-M20	SH 55	150	75	20	M20	
39.C200/100	SH 55	200	100	20	M20	

TYPE D

Flere størrelser kan skaffes på bestilling
More sizes available on request




Varenr. Item no.	Hårdhed Hardness	D	H	h	G	Bemærk Note
39.D8/5	SH 55	8	5	6	M4	
39.D10/10	SH 55	10	10	10	M5	
39.D10/10-A2	SH 55	10	10	10	M5	A2: Rustfri Stainless
39.D13/13-M8x35	SH 68	13	13	38	M8	
39.D15/4G-M4x6	SH 68	15	4	6	M4	Grå Grey - RAL 7035
39.D15/10	SH 55	15	10	15	M5	
39.D15/10-M6	SH 55	15	10	18	M6	
39.D15/15	SH 55	15	15	15	M5	
39.D15/15-M6	SH 55	15	15	15	M6	
39.20/8-M8	SH 55	20	8	8	M8	
39.D20/10	SH 55	20	10	18	M6	
39.D20/10-A4	SH 55	20	10	18	M6	A4: Syrefast Acid proof
39.20/15-M5	SH 57	20	15	8	M5	
39.D20/15E	SH 55	20	15	15	M6	
39.D20/20	SH 55	20	20	15	M5	
39.D20/20-M6x43	SH 43	20	20	15	M6	
39.D20/20-M6	SH 55	20	20	18	M6	
39.D25/15	SH 55	25	15	18	M6	
39.D25/15-A2	SH 68	25	15	18	M6	A2: Rustfri Stainless
39.D25/18	SH 55	25	18	20	M8	
39.D30/8-M6GX	SH 55	30	8	15	M6	Grå Grey - RAL 7035
39.D30/8-M6x18	SH 55	30	8	18	M6	
39.D30/8-M6x23	SH 55	30	8	23	M6	
39.D30/8-M6G	SH 55	30	8	28	M6	Grå Grey - RAL 7035
39.D30/10-M6x15	SH 55	30	10	15	M6	
39.D30/10-M6	SH 55	30	10	18	M6	
39.D30/10-M6x28	SH 55	30	10	28	M6	
39.D30/10	SH 55	30	10	20	M8	
39.D30/10-68	SH 55	30	10	68	M8	
39.D30/10-A2	SH 55	30	10	20	M8	A2: Rustfri Stainless
39.D30/10-68	SH 55	30	10	68	M8	
39.D30/12-M6G	SH 55	30	12	23	M6	Grå Grey - RAL 7035
39.D30/15-M6	SH 55	30	15	18	M6	
39.D30/15-M6G	SH 55	30	15	23	M6	Grå Grey - RAL 7035
39.D30/15	SH 55	30	15	20	M8	
39.D30/15-M8x23	SH 55	30	15	23	M8	
39.D30/15-M10x25	SH 55	30	15	25	M10	
39.D30/15-M10x50	SH 55	30	15	50	M10	
39.D30/18-M10	SH 55	30	18	18	M10	
39.D30/20-M6-43	SH 43	30	20	18	M6	
39.D30/20-M6	SH 55	30	20	20	M6	
39.D30/20-M8x15	SH 55	30	20	15	M8	
39.D30/20	SH 55	30	20	20	M8	
39.D30/52-A2-8	SH 55	30	52	8	M8	A2: Rustfri Stainless
39.D30/30-M6	SH 55	30	30	18	M6	
39.D30/30	SH 55	30	30	20	M8	
39.D40/15-M6	SH 55	40	15	18	M6	
39.D40/15	SH 55	40	15	20	M8	
39.D40/20-M6-43	SH 43	40	20	18	M6	
39.D40/20-M6	SH 55	40	20	18	M6	
39.D40/20	SH 55	40	20	18	M8	
39.D40/20-M10	SH 55	40	20	20	M10	
39.D40/20-A2	SH 55	40	20	20	M10	A2: Rustfri Stainless
39.D40/25-A2-S	SH 60	40	25	30	M8	A2: Rustfri Stainless. Silikone, FDA conform. Blå Blue - RAL 5002
39.D40/25-A2	SH 55	40	25	20	M10	A2: Rustfri Stainless

TYPE D

Flere størrelser kan skaffes på bestilling

More sizes available on request





Varenr. Item no.	Hårdhed Hardness	D	H	h	G	Bemærk Note
39.D25/10-M6+6	SH55	25	10	6	M6	
39.D40/30-M8	SH 55	40	30	18	M8	
39.D40/30-M8x23	SH 55	40	30	23	M8	
39.D40/30-A2	SH 55	40	30	20	M10	A2: Rustfri Stainless
39.D40/30	SH 55	40	30	23	M10	
39.D40/35-M8-A2	SH 55	40	35	20	M8	A2: Rustfri Stainless
39.D40/35	SH 55	40	35	20	M10	
39.D40/35-A2	SH 55	40	35	20	M10	A2: Rustfri Stainless
39.D40/38	SH 55	40	38	25	M8	
39.D40/40-M8x23-68	SH 68	40	40	23	M8	
39.D40/40	SH 55	40	40	20	M10	
39.D40/40-A2	SH 55	40	40	20	M10	A2: Rustfri Stainless
39.D40/45-A2	SH 55	40	45	20	M10	
39.D50/20-M10x15	SH 70	50	20	15	M10	
39.D50/20	SH 70	50	20	28	M10	
39.D50/20-M12	SH 55	50	20	23	M12	
39.D50/25	SH 55	50	25	20	M10	
39.D50/30-M10	SH 55	50	30	20	M10	
39.D50/30-M10-A2	SH 55	50	30	28	M10	A2: Rustfri Stainless
39.D50/30-M10x38	SH 55	50	30	38	M10	
39.D50/30	SH 55	50	30	20	M12	
39.D50/40-43	SH 43	50	40	10	M10	
39.D50/40	SH 55	50	40	20	M10	
39.D50/40NBR	SH 55	50	40	20	M10	NBR
39.D50/50	SH 55	50	50	20	M10	
39.D50/60	SH 55	50	60	28	M10	
39.D50/80	SH 55	50	80	28	M10	
39.D60/30	SH 55	60	30	28	M10	
39.D60/30-M12	SH 55	60	30	23	M12	
39.D60/40	SH 55	60	40	28	M10	
39.D60/40M12	SH 55	60	40	23	M12	
39.D60/50	SH 55	60	50	28	M10	
39.D65/35	SH 55	65	35	20	M12	
39.D70/40	SH 55	70	40	28	M10	
39.D70/40-M12	SH 55	70	40	27	M12	
39.D70/45-M10x12	SH 55	70	45	12	M10	
39.D75/40-68	SH 68	75	40	30	M12	
39.D75/50-M10	SH 55	75	50	28	M10	
39.D75/50-M10/sh68	SH 68	75	50	28	M10	
39.D75/50-M12	SH 55	75	50	20	M12	
39.D100/30	SH 55	100	30	41	M16	
39.D100/50	SH 55	100	50	41	M16	
39.D100/75	SH 55	100	75	41	M16	
39.D150/50	SH 55	150	50	41	M16	

TYPE E

Flere størrelser kan skaffes på bestilling

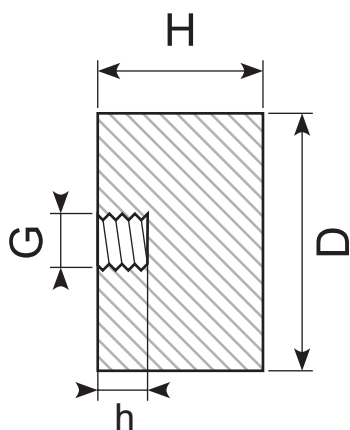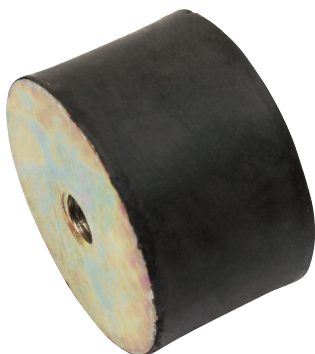More sizes available on request



Varenr. Item no.	Hårdhed Hardness	D	H	h	G	Bemærk Note
39.E20/10-M6	SH 55	20	10	6	M6	
39.E20/10	SH 55	20	10	8	M8	
39.E10/10-M4	SH 57	10	10	4	M4	
39.E20/25-68	SH 68	20	25	6	M6	
39.E25/10-M6	SH 55	25	10	6	M6	
39.E25/10	SH 55	25	10	8	M8	
39.E25/25	SH 57	25	25	6	M6	
39.E25/25-68	SH 68	25	25	6	M6	
39.E30/10-M6-43	SH 43	30	10	6	M6	
39.E30/10-M6G	SH 55	30	10	6	M6	Grå Grey - RAL 7035
39.E30/15-M6	SH 55	30	15	6	M6	
39.E30/15-M6G	SH 55	30	15	6	M6	Grå Grey - RAL 7035
39.E30/15	SH 55	30	15	8	M8	
39.30/17	SH 55	30	17	8	M8	
39.E30/20-M6	SH 55	30	20	6	M6	
39.E30/20	SH 55	30	20	8	M8	
39.E30/30-M6	SH 55	30	30	6	M6	
39.E30/30	SH 55	30	30	8	M8	
39.E30/35	SH 55	30	35	8	M8	
39.E40/15-SH.43	SH 43	40	15	8	M8	
39.E40/20-M6	SH 55	40	20	6	M6	
39.E40/20	SH 55	40	20	8	M8	
39.E40/20NBR	SH 57	40	20	8	M8	NBR
39.E40/30	SH 55	40	30	8	M8	
39.E50/20	SH 55	50	20	8	M8	
39.E50/20-M10	SH 55	50	20	10	M10	
39.E50/20-M12	SH 55	50	20	12	M12	
39.E50/25	SH 55	50	25	10	M10	
39.E50/25-M12	SH 55	50	25	12	M12	
39.E50/40	SH 55	50	40	10	M10	
39.E50/40-M12	SH 55	50	40	12	M12	
39.E60/30	SH 55	60	30	10	M10	
39.E60/30-M12	SH 55	60	30	12	M12	
39.E60/40	SH 55	60	40	10	M10	
39.E60/40-M12	SH 55	60	40	12	M12	
39.E70/35	SH 55	70	35	12	M12	
39.E70/50	SH 55	70	50	12	M12	
39.E75/30	SH 55	75	30	10	M10	
39.E75/30-M12	SH 55	75	30	12	M12	
39.E75/45-M12	SH 55	75	45	12	M12	
39.E75/50	SH 55	75	50	10	M10	
39.E75/50-M12	SH 55	75	50	12	M12	
39.E80/50	SH 55	80	50	12	M12	
39.E80/50-M16	SH 55	80	50	16	M16	
39.E100/25	SH 55	100	25	16	M16	
39.E100/30	SH 55	100	30	16	M16	
39.E100/40NBR43	SH 43	100	40	16	M16	
39.E100/40	SH 55	100	40	16	M16	
39.E100/40NBR	SH 55	100	40	16	M16	NBR
39.E100/40NBR68	SH 68	100	40	16	M16	NBR
39.E100/55NBR68	SH 68	100	55	16	M16	
39.E100/75	SH 55	100	75	16	M16	
39.E150/50	SH 55	150	50	16	M16	
39.E150/50-M20	SH 55	150	50	20	M20	
39.E150/75-M20	SH 55	150	75	20	M20	

Silicone, FDA

Rubber Buffer | Type M

Vare Nr.: 39.M100/55FDA

Diameter (D): Ø100 mm | Højde (H): 55 mm

Gevind (Gxh): M16×41 mm i begge ender

Materiale: Silicone, FDA

Hårdhed: sh.55A

Stål: A4

Rubber Buffer | Type M

Art. Nr.: 39.M100/55FDA


Diameter (D): Ø100 mm | Height (H): 55 mm

Threaded Stud (Gxh): M16×41mm in both ends


Material: Silicone, FDA

Hardness: sh.55A

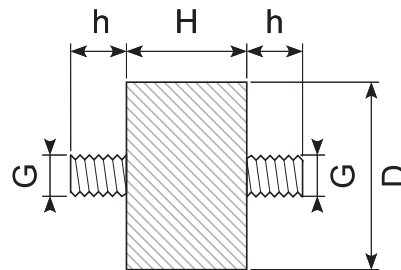
Steel Parts: A4




Type M




Type B



Type C



Type D




Type E

For yderligere hjælp eller forespørgsler, bedes du kontakte os via kontaktoplysningerne nedenfor.


For further assistance or inquiries, please reach out to us via the contact details listed below.

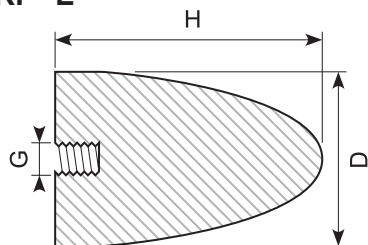Model KP-E





Model: KP-E Varenr. Item no.	D/H	D	H	G
39.KP-E10/10	10/10	10	10	M5
39.KP-E15/22 *	15/22	15	22	M6
39.KP-E20/15 *	20/15	20	15	M6
39.KP-E20/24	20/24	20	24	M6
39.KP-E25/16	25/16	25	16	M6
39.KP-E25/20 *	25/20	25	20	M6
39.KP-E30/30 *	30/30	30	30	M8
39.KP-E30/36	30/36	30	36	M8
39.KP-E35/40 *	35/40	35	40	M8
39.KP-E50/50 *	50/50	50	50	M10
39.KP-E50/61 *	50/61	50	61	M8
39.KP-E50/67 *	50/67	50	67	M8
39.KP-E50/68	50/68	50	68	M10
39.KP-E60/40	60/40	60	40	M10
39.KP-E70/58 *	70/58	70	58	M12
39.KP-E70/60 *	70/60	70	60	M12
39.KP-E75/89	75/89	75	89	M12
39.KP-E75/89-M10 *	75/89	75	89	M10
39.KP-E95/80 *	95/80	95	80	M16
39.KP-E115/136 *	115/136	115	136	M16
39.KP-E118/77 *	118/77	118	77	M16

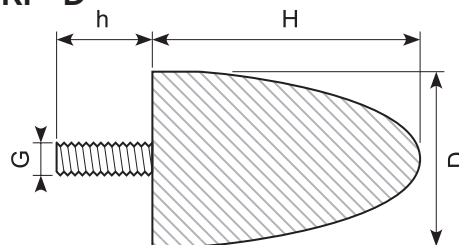Model KP-D




Model: KP-D Varenr. Item no.	D/H	D	H	G	h
39.KP-D10/10	10/10	10	10	M5	12
39.KP-D15/22	15/22	15	22	M6	18
39.KP-D20/15	20/15	20	15	M6	10
39.AV2024	20/24	20	24	M6	18
39.KP-D25/16	25/16	25	16	M6	18
39.KD25/17 *	25/17	25	17	M6	8
39.KP-D25/20	25/20	25	20	M6	18
39.KP-D30/30	30/30	30	30	M8	20
39.KP-D30/36 *	30/36	30	36	M8	20
39.KP-D30/36-A2 *	30/36	30	36	M12	37
39.KP-D30/36-A4 *	30/36	30	36	M12	37
39.AV30	30/40	30	40	M8	23
39.KD50/18 *	50/18	50	18	M10	18
39.KP-D50/50 *	50/50	50	50	M10	28
39.KP-D50/58	50/58	50	58	M10	28
39.KP-D50/61	50/61	50	61	M8	28
39.KP-D50/67	50/67	50	67	M8	33
39.AV5068	50/68	50	68	M10	38
39.KP-D60/40	60/40	60	40	M10	28
39.KP-D70/58 *	70/58	70	58	M12	32
39.KP-D70/60 *	70/60	70	60	M12	37
39.KP-D75/89	75/89	75	89	M12	37
39.KP-D75/89-10 *	75/89	75	89	M10	37
39.AV9580	95/80	95	80	M16	41
39.KP-D115/136 *	115/136	115	136	M16	41
39.KP-D118/77 *	118/77	118	77	M16	41

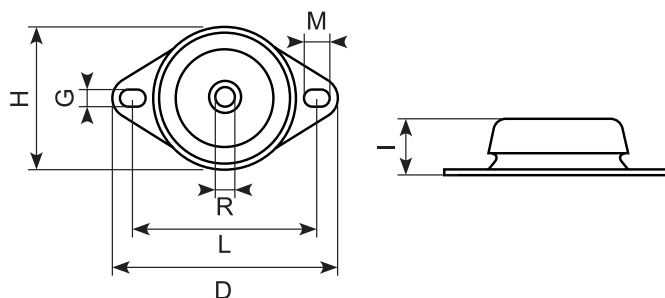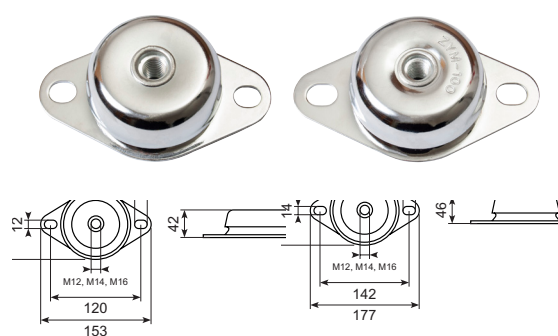

Varenr. Item no.	I	H	G	M	R	L	D	Belastning Load
39.GMF67/34-SH.40	34	67	11	12	M12	88	110	30-40 kg
39.GMF67/34	44	67	11	12	M12	88	110	60 kg
39.GMF75/34	34	75	12	16	M12	100	130	100 kg
39.GMF100/42	42	100	12	16	M12	120	153	200-300 kg
39.GMF108/46	46	108	14	18	M12	142	177	400-500 kg
39.GMF122/50	50	122	14	20	M16	158	192	600-800 kg
39.GMF150/54	54	150	14	18	M18	183	218	1000-1200 kg

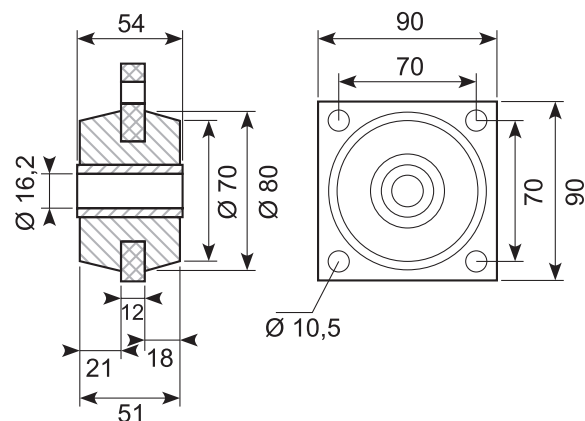* Skaffevarer Special order item

Gummiophæng Rubber suspension**Material:** NR/SBR**Hardness:** SH 55


*

VP

Elastiske løsning

*

Model: VP løsning Varenr. Item no.		D	d	L1	L2
39.VP22/10-20/24	*	22	10	20	24
39.VP22/12-25/28	*	22	12	25	28
39.VP25/10-20/25	*	25	10	20	25
39.VP26/8,5-25/25	*	26	8,5	25	25
39.VP27/14-40/48	*	27	14	40	48
39.VP30/13-40/40	*	30	13	40	40
39.VP30/14-25/28	*	30	14	25	28
39.VP30/14-67/76	*	30	14	67	76
39.VP32/16-50/54	*	32	16	50	54
39.VP40/25-20/20	*	40	25	20	20
39.VP40/25-30/30	*	40	25	30	30
39.VP45/20-60/63	*	45	20	60	63
39.VP50/25-30/34	*	50	25	30	34
39.VP50/25-65/68	*	50	25	65	68
39.VP50/25-80/85	*	50	25	80	85
39.VP55/15,5-30/16	*	55	15,5	30	16
39.VP60/30-60/68	*	60	30	60	68
39.VP62/36-65/71	*	62	36	65	71
39.VP64/38-80/88	*	64	38	80	88

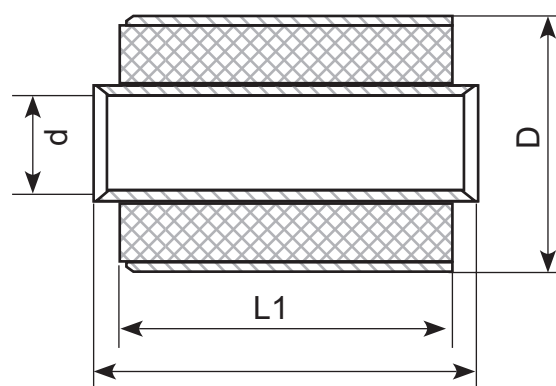**Showroom**

Vi ved, hvor vigtigt det kan være at se og sammenligne produkterne, inden man køber dem. Derfor er vores showroom fyldt med et bredt udvalg af vores profiler. Du kan altid komme forbi på vores adresse:
Edisonvej 11 i Vejle for at tage et kig i vores showroom.

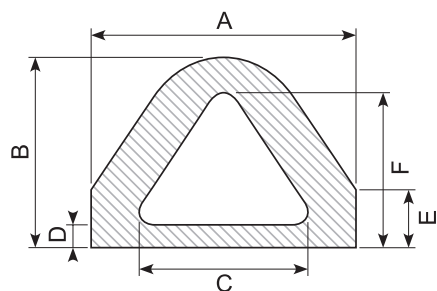
Vi glæder os til at hjælpe dig med alle slags opgaver.

*We know how important it can be to see and compare products before you buy them. That's why our showroom is filled with a wide range of our profiles. You are always welcome to visit us at our address **Edisonvej 11 in Vejle** to take a look in our showroom.*

We look forward to helping you with all kinds of jobs.




Fendere til f.eks. havne og læsseramper
 Fenders for e.g. harbours and loading ramps
Material: EPDM, sort black
Hardness: SH 70




Varenr. Item no.	A	B	C	D	E	F	Kg/m
39.3872	40 mm	25 mm	28 mm	5 mm	10 mm	20 mm	0,6
39.3873 *	55 mm	40 mm	38 mm	8 mm	15 mm	32 mm	1,4
39.3875 *	60 mm	50 mm	40 mm	10 mm	20 mm	42 mm	1,8
39.4087 *	60 mm	52 mm	30 mm	11 mm	11 mm	43 mm	2
39.3876	80 mm	65 mm	50 mm	12 mm	25 mm	39 mm	3,2
39.3887 *	80 mm	70 mm	40 mm	15 mm	0 mm	68 mm	3,5
39.4333 *	80 mm	70 mm	54 mm	15 mm	16 mm	59 mm	4
39.2486 *	82 mm	67 mm	42 mm	15 mm	15 mm	57 mm	3,5
39.4156 *	109 mm	117 mm	50 mm	42 mm	50 mm	95 mm	10,5
39.3846 *	110 mm	95 mm	50 mm	22 mm	18 mm	76 mm	6,1
39.3874 *	110 mm	95 mm	70 mm	15 mm	30 mm	80 mm	5,8
39.4399 *	110 mm	130 mm	70 mm	20 mm	45 mm	110 mm	7,8
39.3010 *	120 mm	110 mm	70 mm	14 mm	35 mm	95 mm	7,4
39.3868 *	150 mm	130 mm	100 mm	20 mm	40 mm	110 mm	10,8
39.4178 *	150 mm	160 mm	105 mm	50 mm	60 mm	130 mm	16,3
39.3722 *	160 mm	138 mm	92 mm	33 mm	0 mm	105 mm	15,8
39.3240 *	170 mm	130 mm	110 mm	15 mm	45 mm	110 mm	10,5

Fendere til f.eks. varevogne, havne og læsseramper
 Fenders for e.g. vans, harbours and loading ramps
Material: EPDM
Hardness: SH 70




Varenr. Item no.	B	H	b	h	L	Kg/m	Farve Colour	Min. order
39.674	40 mm	22 mm	16,5mm	12 mm	20 m	0,7	Sort Black	
39.678	60 mm	50 mm	27 mm	28 mm	10 m	2,1	Sort Black	
39.678X *	50 mm	60 mm			20 m	2,1	Sort Black	
39.680X	84 mm	70 mm	46 mm	41 mm	20 m	3,7	Sort Black	
39.684X	110 mm	95 mm	52 mm	53 mm	10 m	7	Sort Black	
39.684XS Soft - SH 45 *							Sort Black	40 m
39.685 *	120 mm	120 mm			3 m	11,2	Sort Black	
39.680H *							Hvid White	100 m
39.680H-1180	84 mm	70 mm			1,18 m		Hvid White	

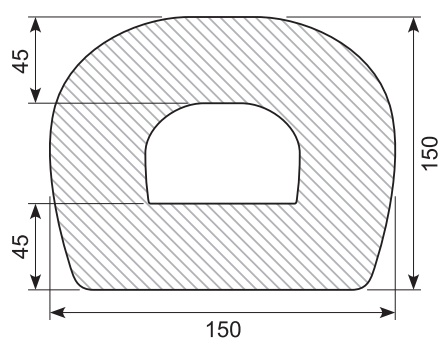39.4380X










Material: NR / SBR
Length: 2 m

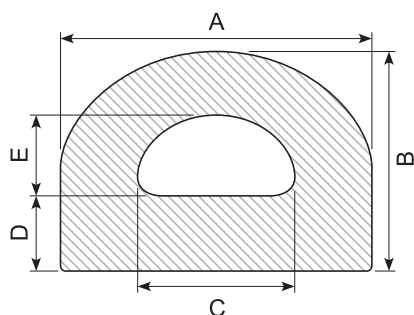Fendere til f. eks. havne og læsseramper
Fenders for e.g. harbours and loading ramps
Material: EPDM, sort black
Hardness: SH 70




Varenr. Item no.		A	B	C	D	E	Kg/m
39.3581		30 mm	25 mm	11 mm	7,5 mm	11 mm	0,67
39.36412	*	40 mm	75 mm	23 mm	32 mm	23 mm	3,76
39.2776	*	51 mm	45 mm	20 mm	10 mm	20 mm	2,08
39.3428	*	65 mm	70 mm	35 mm	18 mm	28 mm	2,99
39.4229	*	80 mm	70 mm	46 mm	25 mm	20 mm	4,57
39.3700	*	80 mm	78 mm	56 mm	12 mm	54 mm	3,55
39.3029	*	80 mm	80 mm	40 mm	25 mm	35 mm	5,54
39.3925	*	80 mm	80 mm	40 mm	23 mm	40 mm	5,59
39.4110	*	95 mm	100 mm	38 mm	30 mm	45 mm	5,4
39.4251	*	100 mm	60 mm	50 mm	20 mm	20 mm	5,81
39.3051		100 mm	80 mm	50 mm	25 mm	30 mm	7,05
39.3802		100 mm	80 mm	80 mm	12 mm	56 mm	3,68
39.3923	*	100 mm	95 mm	44 mm	29 mm	40 mm	8,1
39.3952	*	100 mm	95 mm	60 mm	20 mm	50 mm	6,99
39.4403	*	100 mm	95 mm	60 mm	28 mm	42 mm	6,27
39.4310	*	107 mm	67 mm	40 mm	22 mm	20 mm	6,4
39.3726	*	110 mm	110 mm	50 mm	30 mm	25 mm	12,14
39.3878	*	120 mm	70 mm	30 mm	20 mm	30 mm	6,41
39.93	*	120 mm	120 mm	70 mm	44 mm	51 mm	11,84
39.4381	*	125 mm	100 mm	65 mm	33 mm	37 mm	10,87
39.4257	*	130 mm	145 mm	40 mm	55 mm	40 mm	17,24
39.69	*	130 mm	150 mm	50 mm	50 mm	50 mm	21,05
39.3815	*	140 mm	80 mm	60 mm	20 mm	36 mm	10,27
39.3813	*	140 mm	125 mm	85 mm	35 mm	55 mm	14,75
39.4129	*	150 mm	130 mm	50 mm	55 mm	50 mm	20
39.4380	*	150 mm	150 mm	80 mm	40 mm	75 mm	18,22
39.3381	*	150 mm	150 mm	85 mm	30 mm	85 mm	18,81
39.4224	*	150 mm	150 mm	92 mm	29 mm	92 mm	14,7
39.4244	*	150 mm	180 mm	45 mm	87 mm	40 mm	27,8
39.3366	*	160 mm	125 mm	90 mm	25 mm	65 mm	15,82
39.4311	*	160 mm	175 mm	68 mm	79 mm	68 mm	17,1
39.3023	*	190 mm	195 mm	21 mm	89 mm	21 mm	40,57
39.4012	*	190 mm	195 mm	55 mm	89 mm	55 mm	37,7
39.3803	*	200 mm	150 mm	148 mm	14 mm	113 mm	11,81
39.57	*	200 mm	165 mm	40,5 mm	80 mm	40,5 mm	31,44
39.4269	*	200 mm	220 mm	75 mm	82 mm	75 mm	36,85
39.4249	*	200 mm	220 mm	75 mm	82 mm	75 mm	42,39
39.4250	*	200 mm	220 mm	100 mm	38 mm	80 mm	39,38
39.3849	*	240 mm	260 mm	110 mm	90 mm	110 mm	54,54
39.56	*	250 mm	200 mm	136 mm	50 mm	100 mm	39,84
39.3879	*	250 mm	290 mm	120 mm	60 mm	110 mm	48,96
39.4054	*	280 mm	190 mm	180 mm	50 mm	90 mm	38,5
39.79	*	300 mm	254 mm	150 mm	75 mm	104 mm	68,25
39.55	*	350 mm	350 mm	220 mm	80 mm	165 mm	97,68

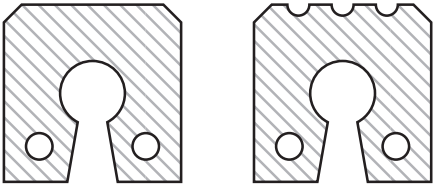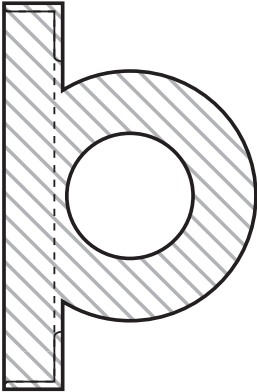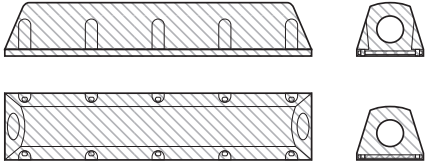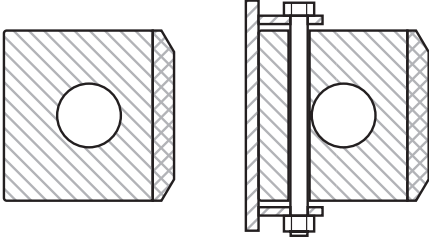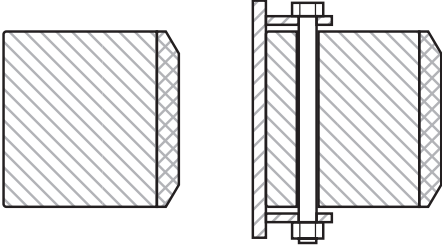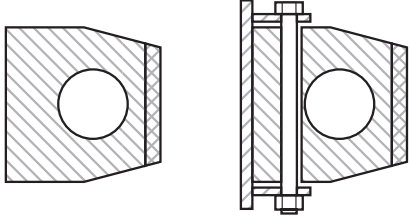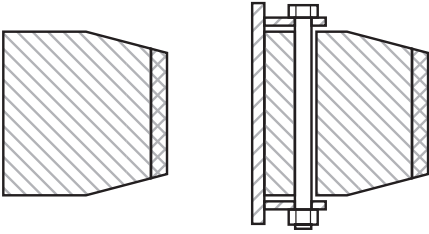
39.BUMPER-CAR	Keyhole fender	Wing-type-fender
 Hjulstop/fender uden huller og montageplade til personbiler eller varevogne. Wheel stop / fender without holes and mounting plate for cars or vans. 150 x 130 x 1.200 mm		
MC-fender	KF-A-fender	KF-B-fender
	 Composite front	 Composite front
KF-C-fender	KF-D-fender	
 Composite front	 Composite front	

Varenr. Item no.	Type Tegning Drawing	B Børste- længde Brush length	T Totalhøjde Total height
57.400/3E *	A	10 mm	26 mm
57.401/3E	A	14 mm	30 mm
57.401/3EJ	A	14mm	30mm
57.402/3EJ	A	24mm	40cm
57.402/3E *	A	24 mm	40 mm
57.408/3E *	A	34 mm	50 mm
57.403/3E	B	25 mm	50 mm
57.410/3E	B	35 mm	60 mm
57.405/3E *	B	45 mm	70 mm
57.404/3E *	C	40 mm	90 mm
57.406/3E	C	60 mm	110 mm
57.411/3E	C	80 mm	130 mm
57.407/3E	C	100 mm	150 mm
57.412/3E *	C	120 mm	170 mm
57.413/3E *	C	150 mm	200 mm

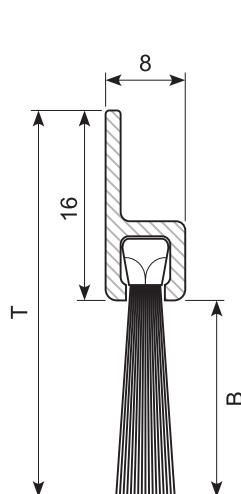
Type A



Type B

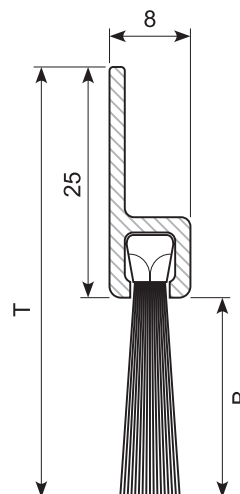


Type C

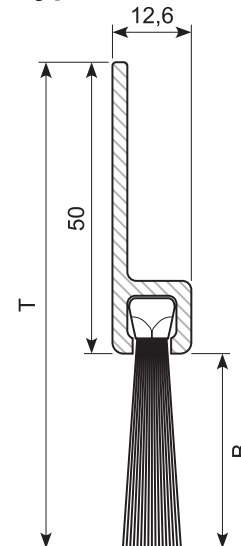


Varenr. Item no.	Type Tegning Drawing	B Børste- længde Brush length	T Totalhøjde Total height
57.440/3E *	D	10 mm	17 mm
57.441/3E *	D	14 mm	21 mm
57.442/3E *	D	24 mm	31 mm
57.445/3E *	D	34 mm	41 mm
57.443/3E *	E	25 mm	34 mm
57.449/3E *	E	35 mm	44 mm
57.444/3E *	E	45 mm	54 mm
57.450/3E *	F	40 mm	53 mm
57.446/3E *	F	60 mm	73 mm
57.448/3E *	F	80 mm	93 mm
57.447/3E *	F	100 mm	113 mm
57.451/3E *	F	120 mm	133 mm
57.452/3E *	F	150 mm	163 mm


Type D



Type E




Type F




Varenr. Item no.	Type Tegning Drawing	B Børste- længde Brush length	T Totalhøjde Total height
57.453/3E *	G	10 mm	26 mm
57.454/3E *	G	14 mm	30 mm
57.455/3E *	G	24 mm	40 mm
57.456/3E *	G	34 mm	50 mm
57.423/3E *	H	25 mm	50 mm
57.424/3E *	H	35 mm	60 mm
57.425/3E *	H	45 mm	70 mm
57.426/3E *	I	40 mm	87 mm
57.427/3E *	I	60 mm	107 mm
57.428/3E *	I	80 mm	127 mm
57.429/3E	I	100 mm	147 mm
57.430/3E *	I	120 mm	167 mm
57.431/3E *	I	150 mm	197 mm

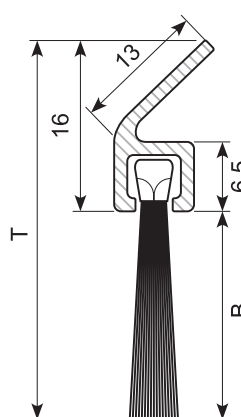
Type G



















Type H

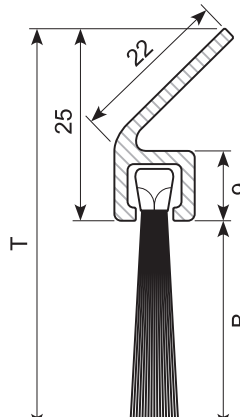

Type I

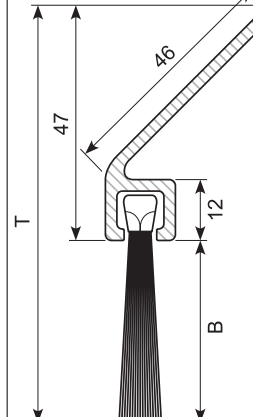

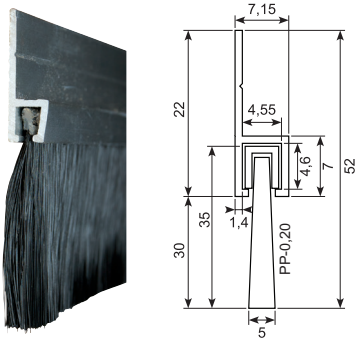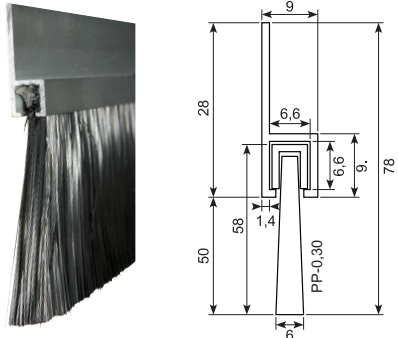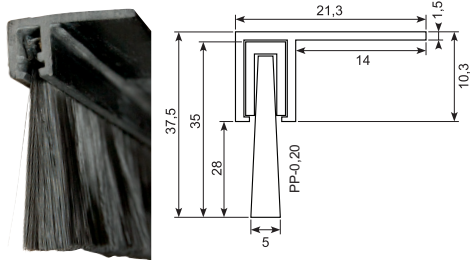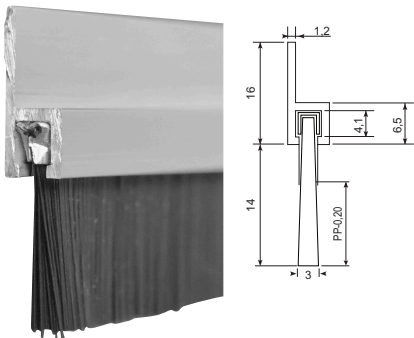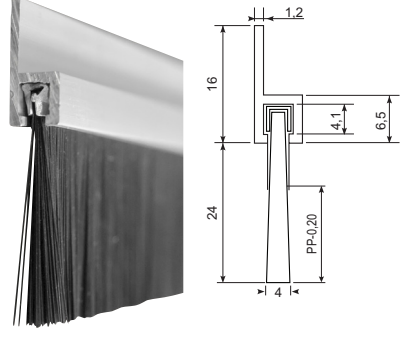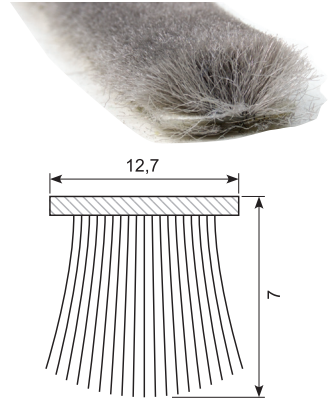57.403/2.5J  Material: Aluminium with polypropylene brush Length: 2,5 m	57.405/2J  Material: Aluminium with polypropylene brush Length: 2 m	57.443/2JP  Material: Plastic with polypropylene brush Length: 2 m
57.401/3EJ  H-brush. H: 30 mm, BH: 14 mm. Available in lengths of 3 m	57.402/3EJ  H-brush. H: 40 mm, BH: 24 mm. Available in lengths of 3 m	33.615  Self-adhesive list with brushes
33.671  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Min. order: 2.000 m	33.672  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Min. order: 2.000 m	33.673  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Min. order: 2.000 m

33.674 *  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Min. order: 3.000 m	33.675 *  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Min. order: 3.000 m	33.676 *  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Min. order: 3.000 m	30.13066  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Glass width: 5 mm <i>Discontinued when sold.</i> Alternative e.g. 30.13066NEW
33.624 *  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Min. order: 3.000 m	33.625 *  Material: EPDM Density: 1,28 Hardness: SH 70 Flock: 3,3 dtex Min. order: 3.000 m		33.416  Material: PVC, with brush Grip range: 1 - 2,5 mm Hardness: SH 78 Insert: 25 x 0,48 mm steel


Selvklebende skum med Tedlarbelægning

Benyttes, alt afhængig af folieafdækning, i førerkabiner, motorrum, kompressorer, generatorer, ventilatorer, turbiner, pumper og lignende.

Self-adhesive foam with Tedlar coat

Depending on the foil covers this is used in cabs, engine compartment, compressors, generators, fans, turbines, pumps or the like.

Varenr. Item no.	Farve Color	Overflade Surface	Størrelse Size
48.603	Hvid White	Plan 100% Plane 100%	20 x 1.200 x 1.500 mm

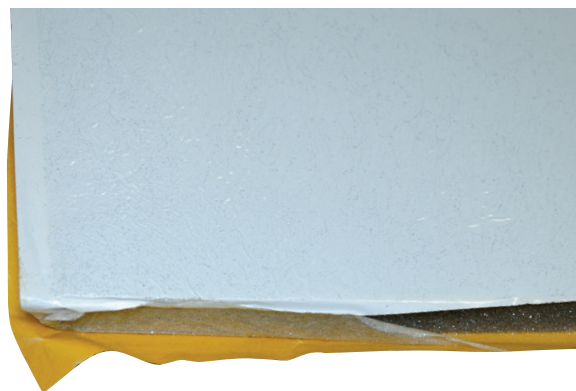

Selvklebende skum med Bitumenindlæg

Self-adhesive foam with Bitumen inserts


Varenr. Item no.	Overflade Surface	Størrelse Size
48.613K	Folie, Plan 100% Foil, Plane 100%	33 x 600 x 1.000 mm

Selvklebende skum med gummioverflade

Self-adhesive foam with rubber surface

Varenr. Item no.	Farve Color	Overflade Surface	Størrelse Size
48.626	Sort Black	Plan 100% Plane 100%	2 / 10 x 1.200 x 1.500 mm

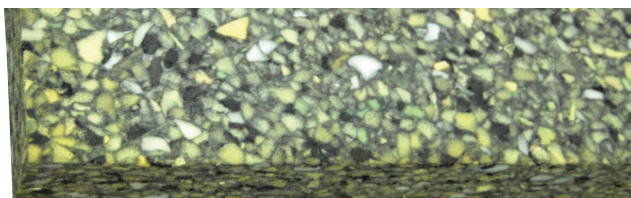Lydisoleringsmaterialet er lavet af åbencellede, fleksible skummaterialer i tungere densiteter. Den forøgede densitet er opnået ved at anvende regenereret skum. Anvendelsesområdet kan være lydisolering af motorrum i lystbåde, vindmøllehuse, kompressorer og andre støjende maskiner, hvor det er muligt at adskille støjilden fra det omliggende område. Da der ofte skal etableres et kølende luftskifte i disse situationer, laver man en lydsluse beklædt med lydabsorptionsmateriale. Granulat koldskum med enestående lyddæmpningsevne benyttes til beklædning af motorrum, maskinafskærmninger, ventilationskamre og støjcabiner. Grundet den lave densitet kan den også med fordel anvendes som absorbent.




The soundproofing material is made of open-celled, flexible foam materials in heavier densities. The increased density is achieved by using regenerated foam. The material can be used to soundproof the engine compartment in yachting, wind turbine housings, compressors and other noisy machines where it is possible to separate the noise source from the surrounding area. It is often necessary to assure a cooling air circulation in these situations. Therefore it is recommended to create a sound lock covered with soundproofing material. Granulate cold foam with unique soundproofing ability is used for coating of engine compartment, machine guards, ventilation chambers and noise cabins. Due to the low density it may also be used as absorbent.



Varenr. Item no.	Overflade Surface	Størrelse Size
48.634	Ingen None	20 x 500 x 1.000 mm
48.635	Ingen None	30 x 500 x 1.000 mm
48.636	Ingen None	40 x 500 x 1.000 mm

Varenr. Item no.	Overflade Surface	Størrelse Size
48.634K	Klæb Glue	20 x 500 x 1.000 mm
48.635K	Klæb Glue	30 x 500 x 1.000 mm
48.636K	Klæb Glue	40 x 500 x 1.000 mm

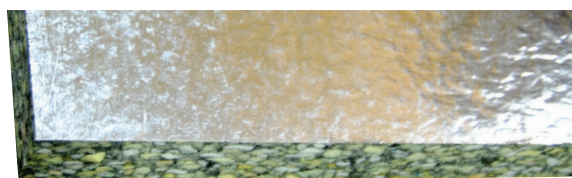

Varenr. Item no.	Overflade Surface	Størrelse Size
48.634F	Folie Foil	20 x 500 x 1.000 mm
48.635F	Folie Foil	30 x 500 x 1.000 mm
48.636F	Folie Foil	40 x 500 x 1.000 mm
48.636FX	Folie Foil	40 x 1.000 x 2.000 mm

Varenr. Item no.	Overflade Surface	Størrelse Size
48.634KF	Folie og klæb Foil and glue	20 x 500 x 1.000 mm
48.635KF	Folie og klæb Foil and glue	30 x 500 x 1.000 mm
48.636KF	Folie og klæb Foil and glue	40 x 500 x 1.000 mm

Lydabsorptionsmaterialer (PU) er typisk lavet af åbencelledede, fleksible skummaterialer i lettere densiteter. Anvendelsesområdet vil typisk være indvendig beklædning af førerkabiner, støjskærme, lydsluger, kanalvægge og lignende situationer, hvor det ikke er muligt at adskille støjkilden fra det omkringliggende område.

Selvklæbende skum uden folie

Anvendes til indvendig beklædning af motorrum, maskinafskærmninger, støjkabiner, el-styretavler, paneler, indlæg i emballage m.m.




Varenr. Item no.	Overflade Surface	Størrelse Size
48.621	Plan Plane	10 x 1.200 x 1.500 mm
48.622	Plan Plane	20 x 1.200 x 1.500 mm
48.622X	Plan Plane	30 x 1.200 x 1.500 mm


Soundproofing materials (PU) are typically made of open-celled, flexible foam materials in lighter densities. The field of application will typically be interior sheathing of cabs, noise barriers, sound locks, canal walls and similar situations where it is not possible to separate the noise source from the surrounding area.

Self-adhesive foam without foil

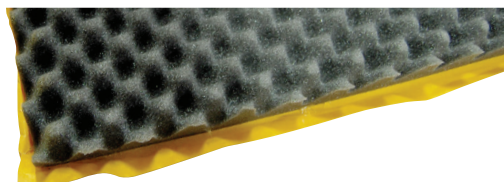This is used for interior sheathing of engine compartment, machine guards, noise cabins, electrical control panels and inserts in packaging with more.



Varenr. Item no.	Overflade Surface	Størrelse Size
48.623	Æggebakke Egg tray	30 / 15 x 1200 x 1500 mm
48.623X *	Æggebakke Egg tray	30 / 15 x 1.200 x 2.000 mm
48.624	Æggebakke Egg tray	40 / 20 x 1200 x 1500 mm

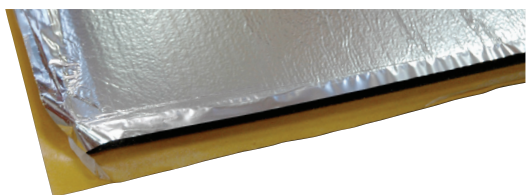

Varenr. Item no.	Farve Color	Overflade Surface	Størrelse Size
48.608	Alu.	Plan Plane 100%	20 x 1.200 x 1.500 mm
48.609	Alu.	Plan Plane 100%	30 x 1.200 x 1.500 mm

Selvklæbende skum med PVC-folie


Benyttes, alt afhængig af folieafdækning, til beklædning i førerkabiner, motorrum, kompressorer, generatorer, ventilatorer, turbiner, pumper og lignende.




Varenr. Item no.	Farve Color	Overflade Surface	Størrelse Size
48.605X	Sort Black	2% perforated	10 x 1.200 x 1.500 mm
48.605	Sort Black	2% perforated	20 x 1.200 x 1.500 mm
48.605Y	Sort Black	2% perforated	30 x 1.200 x 1.500 mm

Self-adhesive foam with PVC foil

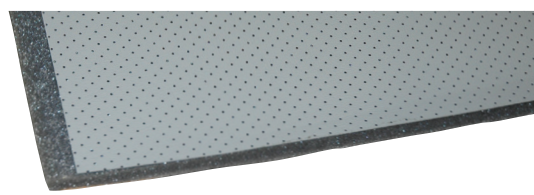Depending on the foil covers this is used for sheathing in cabs, engine compartment, compressors, generators, fans, turbines, pumps or the like.



Varenr. Item no.	Farve Color	Overflade Surface	Størrelse Size
48.451	Grå Grey	2 % perf. / pap 2 % perf. / cardcoard	10 x 1.000 x 1.500 mm
48.452	Grå Grey	2 % perf. / pap 2 % perf. / cardcoard	20 x 1.000 x 1.500 mm

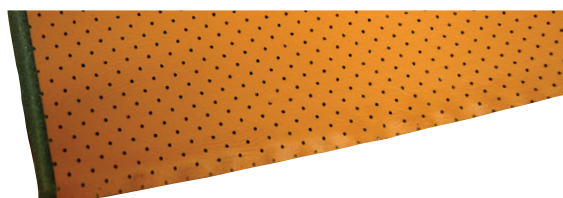


Varenr. Item no.	Farve Color	Overflade Surface	Størrelse Size
48.605B *	Brun Brown	2 % perforated	20 x 1.200 x 1.500 mm

Min. order: 10 pcs.

Bitumenplader

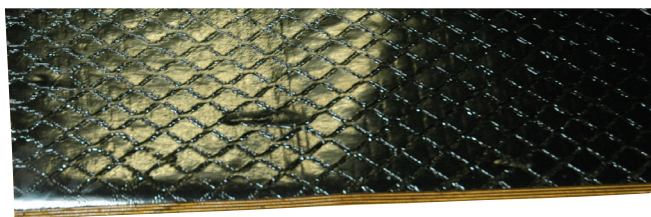Baserer på kunststofmateriale. Lyddæmpningsmaterialet er lavet af hårdt og tungt materiale. Anvendelsesmulighederne kan være dæmpning af store pladearealer, bundplader i biler/maskiner, dørsider og andre steder, hvor der kan opstå resonans.




Varenr. Item no.	Overflade Surface	Pakke Pack	Størrelse Size
48.544A	Klæb Adhesive	4 pcs.	500 x 500 x 3 mm
48.542	Klæb Adhesive	6 pcs.	500 x 250 x 2,2 mm

Bitumen plates

Based on synthetic material. The soundproofing material is made of hard and heavy material. The field of application can be damping of large plate areas, bottom plates in cars / machinery, doors and other places where there may be resonance.



Varenr. Item no.	Overflade Surface	Pakke Pack	Tykkelse Thickness	Størrelse Size
48.442	Klæb Adhesive	1 pc	1,7 mm	500 x 1.050 mm

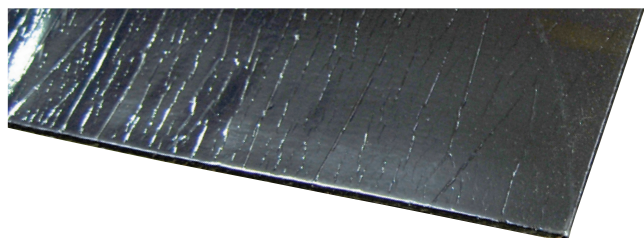

Varenr. Item no.	Overflade Surface	Pakke Pack	Tykkelse Thickness	Størrelse Size
48.612	Klæb Adhesive	1 pc	3 mm	750 x 1.200 mm

68.4250



Alutape til samling af motorisolering. 50 mm x 10 m.
Alu tape for the assembly of motor insulation.
50 mm x 10 m.

63.550301



Plastskive Ø50 mm til montering af motorisolering.
Pakke med 40 stk.
Plastic disc with 50 mm diameter for mounting of motor insulation. Pack of 40 pcs.



NR-SBR gummimåtte

Prisgunstig gummiplade til almen brug, hvor der ikke stilles større krav til trækstyrke. Bruges til pakninger, mellemlæg m.m.

Material: NR - SBR

Colour: Black

Quality: Commercial

NR-SBR rubber sheet

Commercial rubber mat for normal use, where there are no specific demands on tensile strength. Useful for eg. seals.

Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.400-2	1.400 mm	20.000 mm	2 mm	1	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-3	1.400 mm	20.000 mm	3 mm	1	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-4	1.400 mm	20.000 mm	4 mm	1	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-5	1.400 mm	10.000 mm	5 mm	1	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-6/650	650 mm	10.000 mm	6 mm	2	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-6	1.400 mm	10.000 mm	6 mm	2	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-8	1.400 mm	10.000 mm	8 mm	2	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-10	1.400 mm	10.000 mm	10 mm	2	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-12	1.400 mm	10.000 mm	12 mm	2	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-15	1.400 mm	5.000 mm	15 mm	0	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa
38.400-20	1.400 mm	5.000 mm	20 mm	0	SH 70	1,55 g/cm ³	200%	-20 +70 °C	4 MPa

Blød paragummimåtte

Meget blød, meget elastisk, stor friktion.

Material: NR

Colour: Red

Quality: Commercial

Soft para rubber sheet

Very soft. Highly elastic, good friction.

Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.401-2	1.400 mm	10.000 mm	2 mm	0	SH 40	1,1 - 1,25 g/cm ³	600%	-20 +90 °C	18 MPa
38.401-3	1.400 mm	10.000 mm	3 mm	0	SH 40	1,1 - 1,25 g/cm ³	600%	-20 +90 °C	18 MPa
38.401-4	1.400 mm	10.000 mm	4 mm	0	SH 40	1,1 - 1,25 g/cm ³	600%	-20 +90 °C	18 MPa
38.401-5	1.400 mm	10.000 mm	5 mm	0	SH 40	1,1 - 1,25 g/cm ³	600%	-20 +90 °C	18 MPa
38.401-6	1.400 mm	10.000 mm	6 mm	0	SH 40	1,1 - 1,25 g/cm ³	600%	-20 +90 °C	18 MPa
38.401-10	1.400 mm	10.000 mm	10 mm	0	SH 40	1,1 - 1,25 g/cm ³	600%	-20 +90 °C	18 MPa
38.401-15	1.400 mm	5.000 mm	15 mm	0	SH 40	1,1 - 1,25 g/cm ³	600%	-20 +90 °C	18 MPa

EPDM gummiplade

Meget god ozon- og vejrbestandighed.
God temperaturbestandighed.

Material: 30% EPDM

Colour: Black

Quality: Commercial

EPDM rubber plate

High ozone and weather resistance.
Good temperature resistance.

Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.402-0,5*	1.200 mm	20.000 mm	0,5 mm	0	SH 70	1,4 g/cm ³	300%	-30 +100 °C	5 MPa
38.402-1	1.400 mm	20.000 mm	1 mm	0	SH 70	1,4 g/cm ³	300%	-30 +100 °C	5 MPa
38.402-2	1.400 mm	10.000 mm	2 mm	0	SH 70	1,4 g/cm ³	300%	-30 +100 °C	5 MPa
38.402-3	1.400 mm	10.000 mm	3 mm	0	SH 70	1,4 g/cm ³	300%	-30 +100 °C	5 MPa
38.402-4	1.400 mm	10.000 mm	4 mm	0	SH 70	1,4 g/cm ³	300%	-30 +100 °C	5 MPa
38.402-5	1.400 mm	10.000 mm	5 mm	0	SH 70	1,4 g/cm ³	300%	-30 +100 °C	5 MPa

* Min. 24m²

● Ozonbestandighed 200 pphm Ozone resistance 200 pphm

CR gummiplade

God vejr/vind- og ozonbestandighed. Eget hvor der ikke stilles krav til træk/rivstyrke. Betinget oliebestandig.

Materiale Material: CR

Colour: Black

Quality: Commercial

CR rubber plate

Good weather resistance. Used where there are no specific demands to tensile strength. Conditional oil resistant.

Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.403-2	1.400 mm	20.000 mm	2 mm	0	SH 65	1,55 g/cm ³	280%	-30 +70 °C	3,5 MPa
38.403-3	1.400 mm	20.000 mm	3 mm	0	SH 65	1,55 g/cm ³	280%	-40 +90 °C	3,5 MPa
38.403-4	1.400 mm	20.000 mm	4 mm	0	SH 65	1,55 g/cm ³	280%	-40 +90 °C	3,5 MPa
38.403-5	1.400 mm	10.000 mm	5 mm	0	SH 65	1,55 g/cm ³	280%	-40 +90 °C	5 MPa
38.403-6	1.400 mm	10.000 mm	6 mm	0	SH 65	1,55 g/cm ³	280%	-40 +90 °C	5 MPa
38.403-8	1.400 mm	10.000 mm	8 mm	0	SH 65	1,55 g/cm ³	280%	-40 +90 °C	3,5 MPa

NBR / Nitril gummiplade

Prisgunstig sort nitril med gode mekaniske egenskaber. Eget til alle alifatisk og aromatiske olier og benzin.

Material: NBR

Colour: Sort Black

Quality: Kommerciel Commercial

NBR / Nitrile rubber plate

Good mechanical properties. Recommended for aliphatic and aromatic oils and petrol.

Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.404-2	1.400 mm	20.000 mm	2 mm	0	SH 70	1,49 g/cm ³	330%	-30 +70 °C	10 MPa
38.404-3	1.400 mm	20.000 mm	3 mm	0	SH 70	1,49 g/cm ³	330%	-30 +70 °C	10 MPa
38.404-4	1.400 mm	20.000 mm	4 mm	0	SH 70	1,49 g/cm ³	330%	-30 +70 °C	10 MPa
38.404-5	1.400 mm	10.000 mm	5 mm	0	SH 70	1,49 g/cm ³	330%	-30 +70 °C	10 MPa
38.404-10	1.400 mm	10.000 mm	10 mm	0	SH 70	1,49 g/cm ³	330%	-30 +70 °C	10 MPa
38.404-20*	1.400 mm	5.000 mm	20 mm	0	SH 70	1,49 g/cm ³	330%	-30 +70 °C	10 MPa

Slid-gummi plade

Høj træk/rivstyrke. Eget til alle stærkt slidende applikationer, grusgrave, sandblæsekabiner.

Wearing/abrasion rubber sheet

With high tensile strength. Recommended for wearing application, gravel pits, sandblasting.

Material: NR-SBR

Colour: Sort Black

Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.405-6	1.400 mm	10.000 mm	6 mm	0	SH 60	1,2 g/cm ³	400%	-30 +70 °C	15 MPa
38.405-8	1.400 mm	10.000 mm	8 mm	0	SH 60	1,2 g/cm ³	400%	-30 +70 °C	15 MPa
38.405-10	1.400 mm	10.000 mm	10 mm	0	SH 60	1,2 g/cm ³	400%	-30 +70 °C	15 MPa
38.405-10X *	2.000 mm	10.000 mm	10 mm	0	SH 60	1,2 g/cm ³	400%	-30 +70 °C	15 MPa
38.405-15	1.400 mm	10.000 mm	15 mm	0	SH 60	1,2 g/cm ³	400%	-30 +70 °C	15 MPa
38.405-20 *	1.400 mm	5.000 mm	20 mm	0	SH 60	1,2 g/cm ³	400%	-30 +70 °C	15 MPa
38.405-40 *	1.200 mm	7.000 mm	40 mm	0	SH 60	1,2 g/cm ³	400%	-30 +70 °C	15 MPa

Silikoneplade Silicone sheet

Material: FDA Silikone

Varenr. Item no.	Vidde Width	Længde Length	Bredde Thickness	Farve Colour	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.406-2T	1.200 mm	10.000 mm	2 mm	Transparent	SH 60	1,25 g/cm ³	450%	-40 +200 °C	6 MPa
38.406-3T	1.200 mm	10.000 mm	3 mm	Transparent	SH 60	1,25 g/cm ³	450%	-40 +200 °C	6 MPa
38.406-5T	1.200 mm	10.000 mm	5 mm	Transparent	SH 60	1,25 g/cm ³	450%	-40 +200 °C	6 MPa
38.406-3H	1.200 mm	10.000 mm	3 mm	Off White	SH 60	1,3 g/cm ³	300%	-40 +250 °C	6 MPa

Viton-gummi

Varenr. Item no.	Tykkelse Thickness	Bredde Width	Længde Length	Indlæg Insertion	Hårdhed Hardness	Forlængelse Elongation	Trækstyrke Tensile strength	Min. order
38.429-2 *	2 mm	1.200 mm	10.000 mm	0	SH 70	250%	7 MPa	12 m ²

Pyramidemåtte

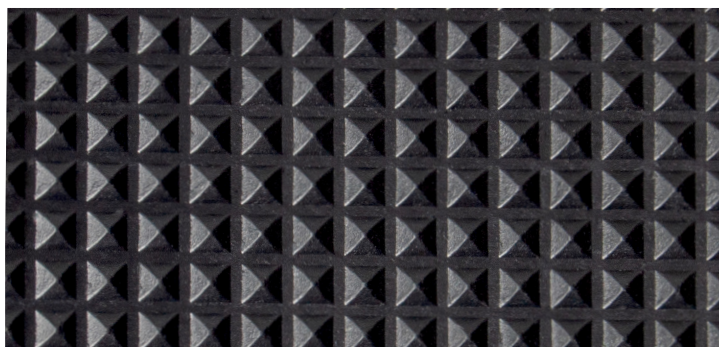
Måtte til industrigulve og maskinområder, varehuse og trafikerede områder. Skridsikker overflade.

Pyramidal rubber sheet

Mat for industrial floors and machine areas, warehouses and trafficked areas. Non-slip surface.

Material: SBR

Colour: Black



Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.432	1.200 mm	10.000 mm	3 mm	0	SH 65 - 70	1,5 g/cm ³	200	-20 +70 °C	3 MPa

Knop-gummimåtte

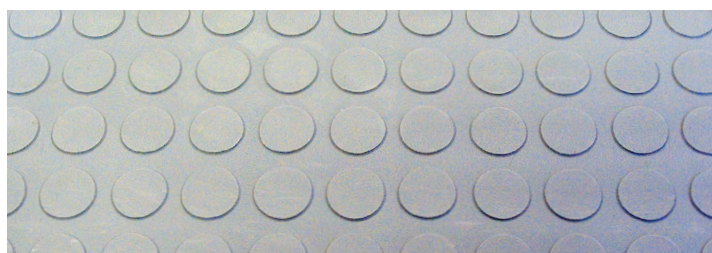
Knopmåtte, anbefales til trafikerede arealer, metro, lufthavne, supermarkeder, elevatorer, busser, toge, lastbiler, både m.m.

Material: SBR

Quality: Commercial

Studded rubber flooring

Studded flooring, recommended for high traffic areas such as metro, airports, supermarkets, lifts, buses, trains, trucks, boats.




Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Farve Color	Hårdhed Hardness	Densitet Density	For- længelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.427-3CXL	1.400 mm	10.000 mm	3,5 mm	0	Sort Black	SH 65-70	1,5 g/cm ³	150%	-20 +70 °C	3 MPa
38.427-3GC	1.200 mm	10.000 mm	3,5 mm	0	Lysegrå Light grey	SH 65-70	1,6 g/cm ³	150%	-20 +70 °C	3 MPa

Finriflet gummimåtte

Finriflet, skridsikker gummimåtte til kabiner, arbejdsborde, hylder, gangarealer, køretøjer, sportsaktiviteter eller udstillinger.


Material: NR/SBR

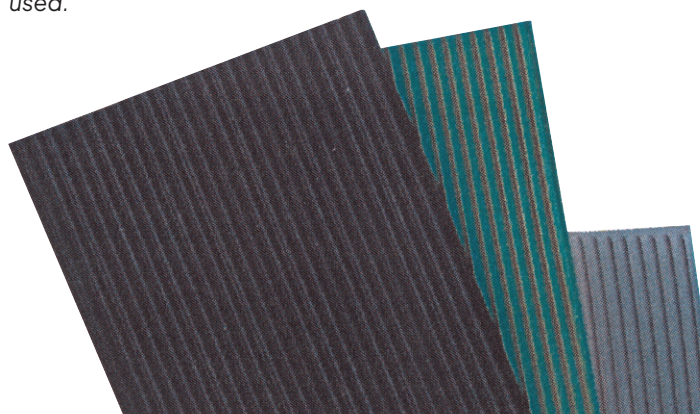Ingen regenereret gummi anvendt. *No regenerated rubber used.*



Fine ribbet rubber mat

Fine-ribbed rubber mat. Non-slip coverings for cabins, working benches, shelves, corridors, vehicles, sporting facilities or exhibition floors.




Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thick- ness	Indlæg Ins.	Farve Color	Hårdhed Hardness	Densitet Density	For- længelse Elongation	Arbejds- temp. Working temp.	Træk- styrke Tensile strength	Bemærk Note
38.407-3X	1.200 mm	20.000 mm	3 mm	0	Sort Black	SH 70	1,46 g/ cm ³	200%	-20 +70 °C	4 MPa	100% virgin quality SBR
38.407-3	1.400 mm	20.000 mm	3 mm	0	Sort Black	SH 70	1,46 g/ cm ³	200%	-20 +70 °C	4 MPa	100% virgin quality SBR
38.407-3C	1.400 mm	20.000 mm	3 mm	0	Sort Black	SH 70	1,6 g/cm ³	280%	-10 +70 °C	3,5 MPa	
38.407-3G	1.400 mm	20.000 mm	3 mm	0	Grå Grey	SH 70	1,6 g/cm ³	350%	-10 +70 °C	5 MPa	
38.407-3XL	1.800 mm	10.000 mm	3,5 mm	0	Sort Black	SH 70	1,46 g/ cm ³	200%		4 MPa	100% virgin quality SBR

Mellemriflet busmåtte

Egnet til gulv og vægbeklædning til busser, både, dyretransport, værksteder mm. NBR indhold 5% kun til små oledryp.

Colour: Sort black

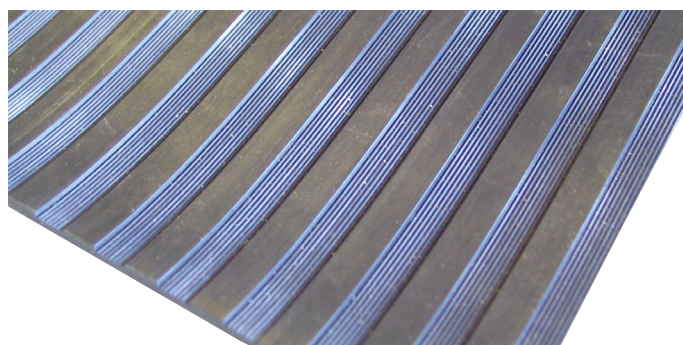
Quality: Kommerciel Commercial



Medium-ribbed bus mat

Recommended for floors and walls for buses, boats, animal transport, workshops, garages etc.

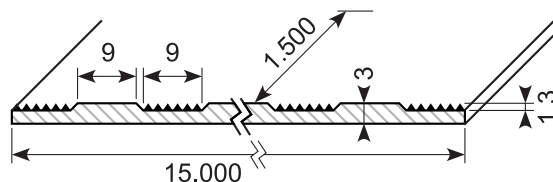NBR content 5% - only for small oil drips.



Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Materiale Material	Indlæg Insertion	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.418	1.500 mm	15.000 mm	3 mm	NR / SBR	0	SH 70	1,6 g/cm ³	280%	-10 +70 °C	3,5 MPa
38.418N	1.500 mm	15.000 mm	3 mm	NBR	0	SH 70	1,45 g/cm ³	250%	-10 +70 °C	6 MPa

Bredriflet busmåtte

Egnet til gulv og vægbeklædning til busser, både, dyretransport, værksteder mm.

Material: SBR = Natur SBR

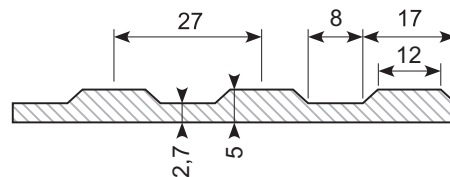
Colour: Black

Quality: Commercial



Wide-ribbed bus mat

Recommended for floors and walls for buses, boats, animal transport, work shops



Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.434A	1.200 mm	10.000 mm	5 mm	0	SH 65-70	1,5 g/cm ³	200%	-25 +70 °C	3 MPa

Bredriflet busmåtte

Egnet til gulv og vægbeklædning til busser, både, dyretransport, værksteder mm.

Material: SBR

Colour: Sort black

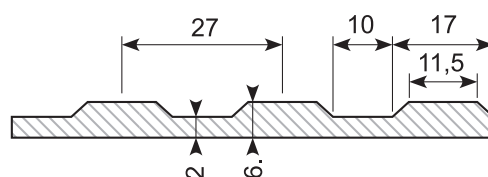
Quality: Kommerciel Commercial



Udgår når solgt
Discontinued when sold

Wide-ribbed bus matting

Recommended for floors and walls for buses, boats, animal transport, workshops, garages etc.



Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.434	1.200 mm	10.000 mm	6 mm	0	SH 65-70	1,5 g/cm ³	200%	-25 +70 °C	3 MPa

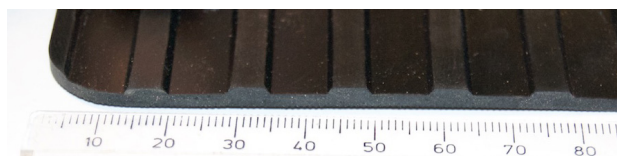
Bredriflet let XL busmåtte

Egnet til gulv og vægbeklædning til busser, både, dyretransport, værksteder mm.

Material: NR/SBR = Natur SBR


Colour: Sort black

Quality: Kommerciel Commercial



Wide-ribbed light XL bus matting

Recommended for floors and walls for buses, boats, animal transport, workshops..



Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.419C	1.400 mm	20.000 mm	3 (3,3) mm	0	SH 65	1,5 g/cm ³	200%	-25 +70 °C	3 MPa
38.435C Discontinued when sold	1.600 mm	10.000 mm	5 mm	0	SH 65	1,5 g/cm ³	200%	-25 +70 °C	3 MPa

Bredriflet busmåtte

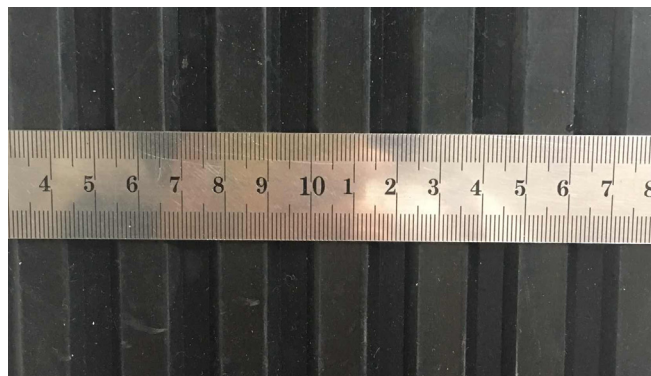
Egnet til gulv og vægbeklædning til busser, både, dyretransport, værksteder mm.

Material: Natur / SBR

Colour: Black


Quality: Commercial

New rubber: No regenerated rubber used



Wide-ribbed bus matting

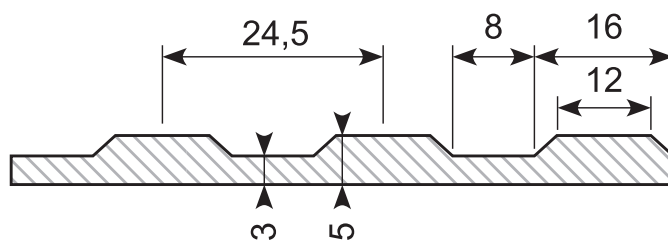Recommended for floors and walls for buses, boats, animal transport, workshops.



Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Kvalitet Quality	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.420X	2.000 mm	10.000 mm	5 mm	0	New rubber	SH 65	1,35 g/cm ³	200%	-30 +100 °C	5 MPa

Bredriflet busmåtte

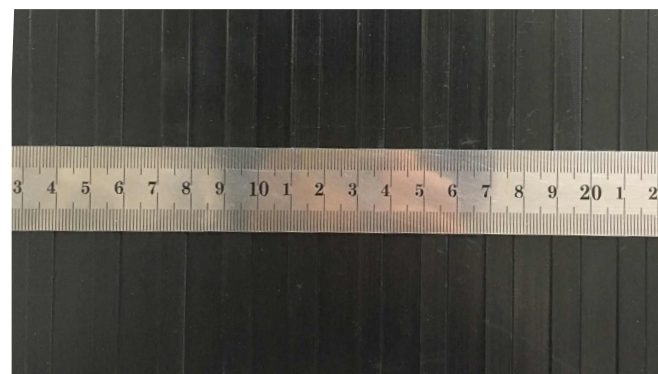
Egnet til gulv og vægbeklædning til busser, både, dyretransport, værksteder mm.

Material: Natur / SBR

Colour: Black


Quality: Commercial

New rubber: No regenerated rubber used



Wide-ribbed bus matting

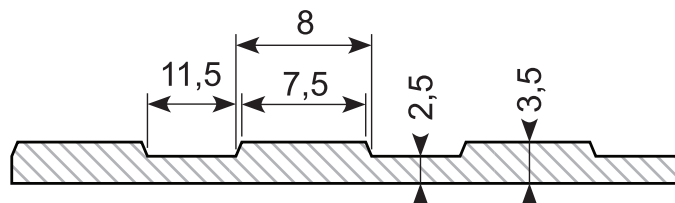Recommended for floors and walls for buses, boats, animal transport, workshops.



Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Kvalitet Quality	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.419A	2.000 mm	10.000 mm	3,5 mm	0	New rubber	SH 65	1,45 g/cm ³	280%	-30 +100 °C	5 MPa
38.436C Discontinued when sold	2.000 mm	10.000 mm	5 mm	0	Commercial	SH 65	1,45 g/cm ³	150%	-30 +100 °C	3 MPa

Hammerslagmåtte

Dørkmatte til industrigulve og maskinområder, varehuse og trafikerede område. Skridsikker overflade.

Material:

NBR: Oil resistant

Commercial 1: NR / SBR - commercial quality

Commercial 2: NR / SBR - commercial quality

Colour: Black

Checker plate matting

Checker mat for industrial floors and machine areas, warehouses and trafficked areas. Non-slip surface.



Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Kvalitet Quality	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.425-3C	1.400 mm	10.000 mm	3 mm	0	Commercial 1	SH 65	1,5 g/cm ³	250%	-10 +70 °C	3 MPa
38.425-5C	1.400 mm	10.000 mm	5 mm	0	Commercial 1	SH 65	1,5 g/cm ³	250%	-10 +70 °C	3 MPa
38.425N-3	1.400 mm	10.000 mm	3 mm	0	NBR	SH 70	1,45 g/cm ³	250%	-10 +70 °C	6 MPa
38.425N-5	1.400 mm	10.000 mm	5 mm	0	NBR	SH 70	1,45 g/cm ³	250%	-10 +70 °C	6 MPa
38.426-3CX	1.600 mm	10.000 mm	3 mm	0	Commercial 1	SH 65	1,5 g/cm ³	250%	-10 +70 °C	3 MPa
38.426-3C	2.000 mm	10.000 mm	3 mm	0	Commercial 2	SH 70	1,5 g/cm ³	180%	-10 +70 °C	3 MPa
38.426-5CX	1.600 mm	10.000 mm	5 mm	0	Commercial 1	SH 65	1,5 g/cm ³	250%	-10 +70 °C	3 MPa
38.426-5C	2.000 mm	10.000 mm	5 mm	0	Commercial 2	SH 70	1,5 g/cm ³	180%	-10 +70 °C	3 MPa
38.426-8C	2.000 mm	10.000 mm	8 mm	0	Commercial 1	SH 65	1,5 g/cm ³	250%	-10 +70 °C	3 MPa

Hammerslagmåtte

Dørkmatte til industrigulve og maskinområder, varehuse og trafikerede område. Skridsikker overflade.

Material:

New rubber 1: NR/SBR, no regenerated rubber used.

New rubber 2: NR/SBR, no regenerated rubber used.

Colour: Black

Checker mat

Checker matting for industrial floors and machine areas, warehouses and high traffic areas. Non-slip surface.

Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Kvalitet Quality	Hårdhed Hardness	Densitet Density	For- længelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.425-3	1.400 mm	10.000 mm	3 mm	0	New rubber 1	SH 70	1,6 g/cm ³	350%	-10 +70 °C	5 MPa
38.425-5	1.400 mm	10.000 mm	5 mm	0	New rubber 1	SH 70	1,6 g/cm ³	350%	-10 +70 °C	5 MPa
38.426-3XL	1.800 mm	10.000 mm	3 mm	0	New rubber 2	SH 65	1,35 g/cm ³	250%	-10 +70 °C	5 MPa
38.426-3	2.000 mm	10.000 mm	3 mm	0	New rubber 2	SH 65	1,35 g/cm ³	250%	-10 +70 °C	5 MPa
38.426-5	2.000 mm	10.000 mm	5 mm	0	New rubber 2	SH 65	1,35 g/cm ³	250%	-10 +70 °C	5 MPa

Diamant gummimåtte

Måtte til industrigulve og maskinområder, varehuse og trafikerede område. Skridsikker overflade.

Material:

Commercial: SBR

PAK free: TPE/SBR

Colour: Sort Black

Diamond rubber mat

Matting for industrial floors and machine areas, warehouses and trafficked areas. Non-slip surface.



Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Indlæg Insertion	Kvalitet Quality	Hårdhed Hardness	Densitet Density	Forlængelse Elongation	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.431	1.400 mm	10.000 mm	3 mm	0	Commercial	SH 70	1,5 g/cm ³	200%	-20 +70 °C	3 MPa
38.431-3C	1.800 mm	10.000 mm	3 mm	0	Commercial	SH 65	1,5 g/cm ³	180%	-20 +70 °C	3 MPa
38.431-5C	1.800 mm	10.000 mm	5 mm	0	Commercial	SH 65	1,5 g/cm ³	180%	-20 +70 °C	3 MPa
38.431-3	1.800 mm	10.000 mm	3 mm	0	PAK free Odour free	SH 65	1,4 g/cm ³	200%	-20 +70 °C	3 MPa
38.431-5	1.800 mm	10.000 mm	5 mm	0	PAK free Odour free	SH 65	1,4 g/cm ³	200%	-20 +70 °C	3 MPa

Rampemåtte trailer ramp, 12 mm

Materiale Material: SBR

Hårdhed Hardness: SH A 65

Densitet Density: 1,25 g/cm³

Forlængelse Elongation: 400%

Arbejdstemperatur Working temperature: -30 +80 °C

Trækstyrke Tensile strength: 8 MPa

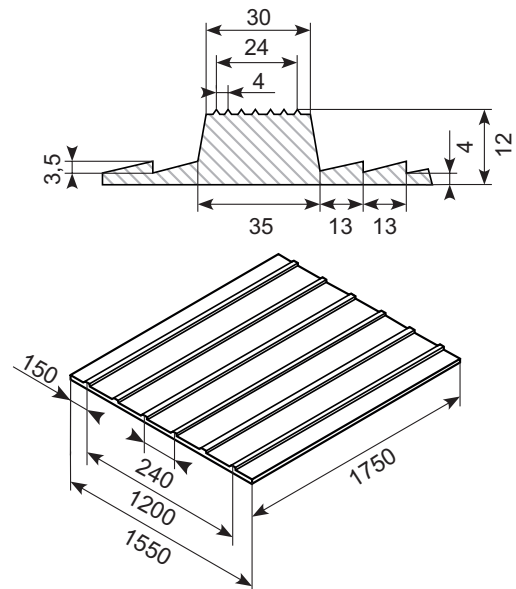
Tykkelse Thickness: 7,5/12 mm

Ribbredde Rib width: 30–35 mm

Bredde Width: 1.750 mm

Højde Height: 1.550 mm

Vægt Weight: 28 kg



Rampemåtte trailer ramp, 20 mm

Materiale Material: SBR

Hårdhed Hardness: SH A 65

Densitet Density: 1,50 g/cm³

Forlængelse Elongation: 300%

Arbejdstemperatur Working temperature: -30 +70 °C

Trækstyrke Tensile strength: 5 MPa

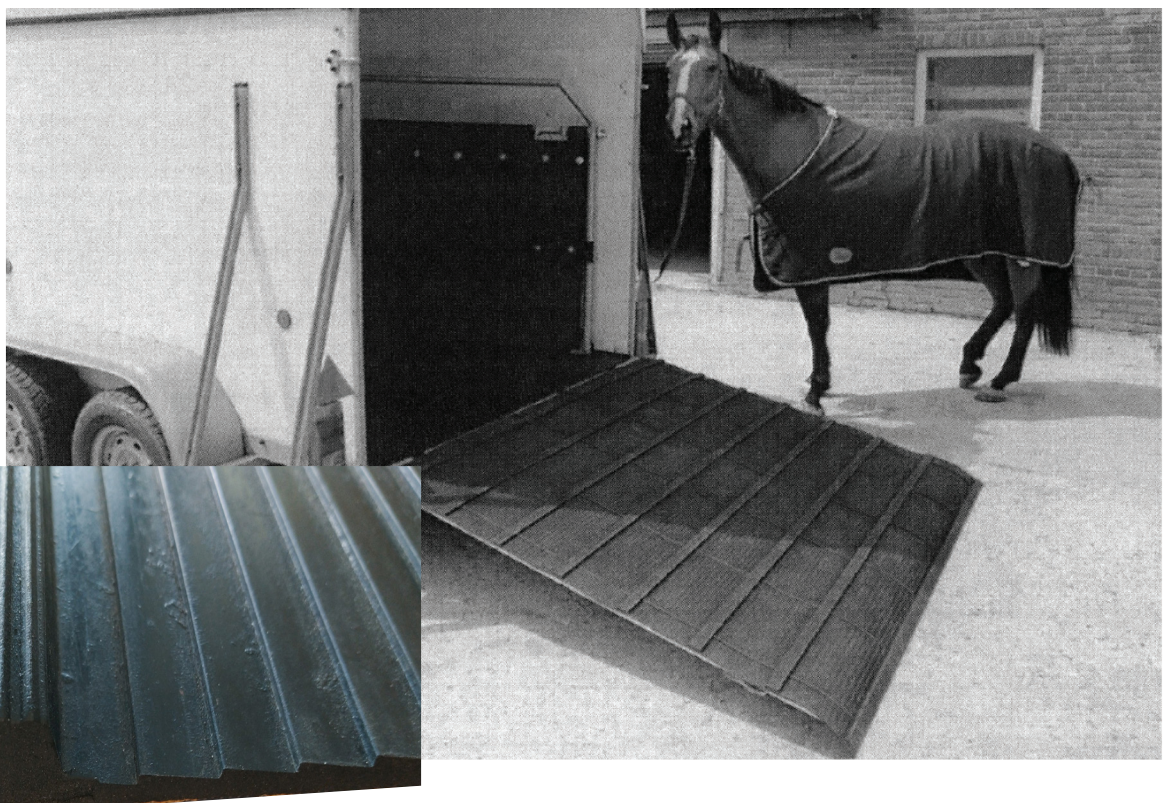
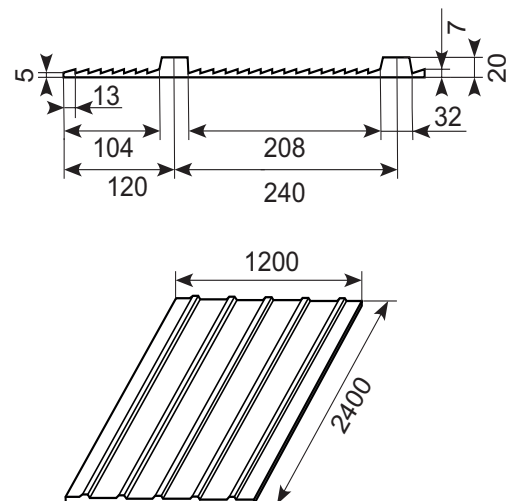
Tykkelse Thickness: 7,5/20 mm

Ribbredde Rib width: 28–32 mm

Bredde Width: 2.400 mm

Højde Height: 1.200 mm

Vægt Weight: 38–40 kg




Ergo Solid

Ergo Solid er en modulmåtte af en speciel nitrilgummiblanding, som gør den både varmebestandig og modstandsdygtig overfor olier, fedt og kemikalier. Modulerne kan nemt bygges sammen til den ønskede størrelse, og de kan også suppleres med skrå kanter for at reducere snublerisikoen. Kanterne fås også i gul for markering af arbejdsområder m.v. Ergo solid er en slidstærk måtte med en skridsikker overflade. Stabile knopper på undersiden løfter måtten, hvilket sørger for dræning og ventilation mod gulvet. Ergo solid har en rigtig god bæreevne og en lukket overflade, der gør den nem at holde ren.

Materiale: Nitril
Farve: Sort

Ergo Solid is a modular mat made of a special nitrile rubber compound that makes it both heat resistant and resistant to oils, greases and chemicals. The modules can be easily assembled to the desired size and can also be supplemented with chamfered edges to reduce the risk of tripping. The edges are also available in yellow for marking work areas etc. Ergo solid is a durable mat with a non-slip surface. Sturdy knobs on the underside lift the mat, providing drainage and ventilation to the floor. Ergo solid has a very good carrying capacity and a closed surface that makes it easy to keep clean.

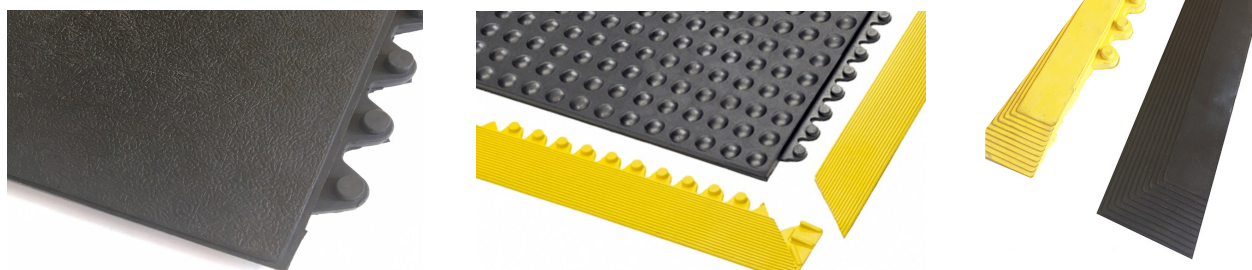Material: Nitrile
Colour: Black



Varenr. Item no.	Beskrivelse Description	Størrelse Size	Vægt Weight
38.9726230	Ergo Solid måtte Ergo Solid mat	910 x 910 x 17 mm	8,2 kg
38.9730030	• Sort skråkant - han Black chamfer - male	76 x 910 mm	1 kg
38.9730030S	• Sort skråkant - hun Black chamfer - female	76 x 910 mm	
38.9750030	Samlestykke Connecting piece	31 x 230 mm	0,1 kg

- **BEMÆRK:** Ved kant rundt om hele måtten bruges 2 han- og 2 hun-skråkanter. Grundmåtten har udvendige tappe på 2 sider.

NOTE: For edging around the entire mat, 2 male and 2 female chamfers are used.
The basic mat has external tabs on 2 sides.

Ergo Bubble

Ergo Bubble måtten er en traditionel elastisk og holdbar boblemåtte fremstillet af skumpolyuretan som både er holdbar og holder formen. Måttens overflade og elasticitet er med til at stimulere blodcirkulationen og muskelfunktionen i fødder, ben og ryg og hjælper dermed til at forebygge belastningsskader. Ergo Bubble er velegnet til brug overalt i tørre miljøer. De skrå kanter minimerer risikoen for at snuble, mens måttens overflade giver god skridsikkerhed. Måtten findes i flere standardstørrelser og kan derudover fremstilles efter dine specialmål.

Materiale: Polyurethan
Farve: Mørk grafit

Måtten kan også skaffes i oliebestandig NBR i størrelserne:
650 x 1.400 mm / 950 x 1.500 mm / 950 x 1.800 mm

The Ergo Bubble mat is a traditional elastic and durable bubble mat made of foam-polyurethane that is both durable and holds its shape. The mat's surface and elasticity help to stimulate blood circulation and muscle function in the feet, legs and back and thus helping to prevent stressinjuries. Ergo Bubble is suitable for use anywhere in dry environments. The chamfered edges minimise the risk of tripping, while the mat's surface provides good slip resistance. The mat is available in several standard sizes and can also be made to your special dimensions.

Material: Polyurethan
Colour: Dark graphite

The mat is also available in oil-resistant NBR in these sizes:
650 x 1.400 mm / 950 x 1.500 mm / 950 x 1.800 mm



Varenr. Item no.	Størrelse Size	Vægt Weight
38.8100110	650 x 950 x 14 mm	3 kg
38.8100310 *	650 x 1.850 x 14 mm	6 kg
38.8103110 *	950 x 1.250 x 14 mm	6 kg

Ergo Durk


Ergo Durk er en klassisk arbejdspladsmåtte af nitrilgummi med en dørkmønstreret overflade. Bagsiden er af EPDM-cellegummi med lukkede celler. Dermed får du en holdbar og slidstærk måtte med en skridsikker overflade, der er modstandsdygtig over for olie, fedt og kemiske stoffer. Kanterne er affasede for at reducere snublefare og for at gøre det nemt at køre en vogn op uden at sidde fast. Fås i standardmåtte fra rulle eller i specialmål efter tegning, alt med affasede kanter. Ergo Durk ESD beskytter også følsomt elektronik imod statisk elektricitet. Måtten er godkendt i henhold til SP 2472.

Material: Nitril / EPDM

Colour: Sort Black

Varenr. Item no.	Størrelse Size	Vægt Weight
38.5017530	* 1.400 x 1.000 x 11 mm	7 kg
38.5017530A	* 1.400 x 10.000 x 11 mm	66 kg

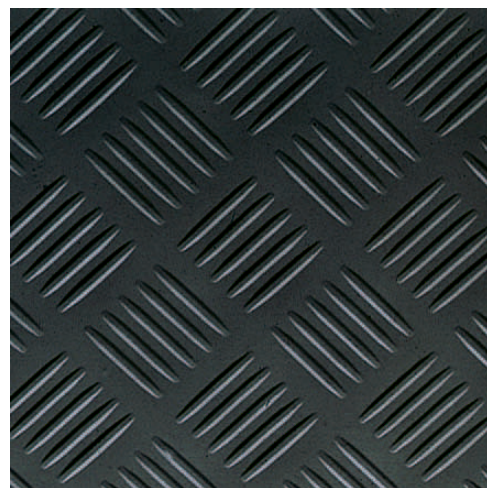Ergo Durk is a classic work mat made of nitrile rubber with a surface check patterned. The underside is made of EPDM cellular rubber with closed cells. This gives you a durable and hard-wearing mat with a non-slip surface that is resistant to oil, grease and chemicals. The edges are chamfered to reduce the risk of tripping and to make it easy to drive up a trolley without getting stuck. Available in standard size from roll or in custom sizes acc. to drawing, all with chamfered edges. Ergo Durk ESD also protects sensitive electronics from static electricity. The mat is approved according to SP 2472.



Ergo Dome

En slidstærk måtte i ren naturgummi (SBR). Ergo Dome er velegnet til alle arbejdsmiljøer, fra tørre til tunge industrier. Måtten kan tåle olie, fedt og kemiske stoffer. Den bobbelformede overflade stimulerer blodcirkulationen og reducerer overbelastningsskader.

Farve: Sort


Måtten kan også skaffes i oliebestandig NBR i størrelserne: 650 x 1.400 mm / 950 x 1.500 mm

A durable mat in pure natural rubber. Ergo Dome is suitable for all working environments, from dry to heavy industries. The mat withstands oil, grease and chemical substances. The bubble tap pattern stimulates blood circulation and reduces overuse injuries.

Colour: Black

The mat is also available in oil-resistant NBR in the sizes: 650 x 1.400 mm / 950 x 1.500 mm

Varenr. Item no.	Størrelse Size	Vægt Weight
38.410200	* 600 x 900 mm	3,2 kg
38.410201	* 900 x 1.200 mm	4 kg

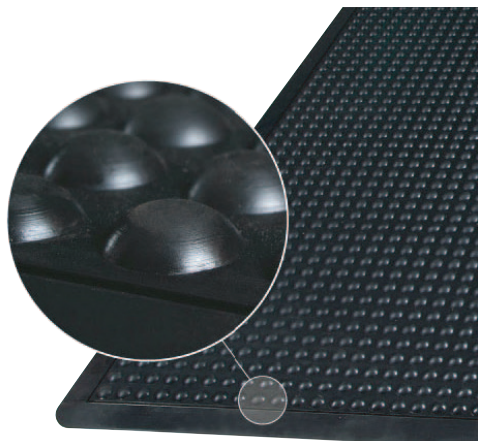

Ergo ring

Ergo ring er en klassisk ringgummimatte, der effektivt bortdræner væde og spildmateriale, hvilket giver en skridsikker overflade at stå på. Den kan også fungere som en grov stænkmatte i indgangspartier. Den åbne ringkonstruktion skraber effektivt alt groft snavs af, giver maksimal skridsikkerhed og en god aflastning. Navene på bagsiden holder maten på plads og tillader væsken at passere igennem.

Materiale: NR

Farve: Sort

Måtten kan også skaffes i oliebestandig NBR i størrelserne:

400 x 500 mm / 600 x 800 mm

Ergo Ring is a classic ring rubber mat that effectively drains away liquid and spills, providing a non-slip surface to stand on. It can also be used as a rough splash mat in entrance areas. The open ring construction effectively scrapes off all coarse dirt, proves maximum slip resistance and good strain relief. Studs on the back hold the mat in place and allow liquid to pass through.

Material: NR

Colour: Black

The mat is also available in oil-resistant NBR in the sizes:

400 x 500 mm / 600 x 800 mm



Varenr. Item no.	Beskrivelse Description	Størrelse Size	Vægt Weight
38.9117630	Ergo ring	800 x 1.200 x 23 mm	11 kg
38.9117631	* Ergo ring	1.000 x 1.500 x 23 mm	21 kg
38.9110030	Samlestykke Connecting piece		

Ergo Ease

Ergo Ease er en modulmatte af nitrilgummi som gør den både varmebestandig og modstandsdygtig over for olie, fedt og kemikalier. Pladerne kan sammensættes til den ønskede størrelse uden anvendelse af samlingsstykker. Måtten kan modstå store belastninger og er egnet til de fleste miljøer, både tørre og våde. Den giver ergonomisk aflastning af fødder, ben og ryg samt en høj skridsikkerhed. Stabile knopper på undersiden løfter maten, hvilket sørger for dræning og ventilation mod gulvet. Affasede kanter minimerer risikoen for at snuble. Kanterne fås også i gul for markering af arbejdsområder m.v.

Materiale: Nitril

Farve: Sort (måtten kan også skaffes i terracottarød)

Ergo Ease is a modular mat made of nitrile rubber which makes it both heat resistant and resistant to oil, grease and chemicals. The sheets can be assembled to the desired size without the use of connectors. The mat can withstand heavy loads and is suitable for most environments, both dry and wet. It provides ergonomic relief for feet, legs and back as well as high slip resistance. Stable knobs on the underside lift the mat, providing drainage and ventilation to the floor. Chamfered edges minimise the risk of tripping. The edges are also available in yellow for marking work areas etc.

Material: Nitrile

Colour: Black (the mat is also available in terracotta red)

Varenr. Item no.	Størrelse Size	Vægt Weight
38.9716230	910 x 910 x 14 mm	8,2 kg

- **BEMÆRK:** Ved kant rundt om hele måtten bruges 2 han- og 2 hun-skråkanter.

Grundmåtten har udvendige tappe på 2 sider.

NOTE: For edging around the entire mat, 2 male and 2 female chamfers are used.

The basic mat has external tabs on 2 sides.



Ergo Classic

Ergo Classic er en arbejdsmåtte af vinyl med en ribmønstret overflade som giver god skridsikkerhed (den opfylder R10 DIN 51130-standarden for skridsikkerhed). Måttens konstruktion af mikroceller stimulerer blodcirkulationen i fødder og ben og giver samtidig en god ergonomisk støtte til ben, ryg og hofter. Den er velegnet til tørre miljøer som f.eks. butikker, lagerbygninger og foran arbejdsborde. Affasede kanter minimerer risikoen for at snuble. Ergo Classic har 3 års fuld slitagegaranti. Nem at tilpasse selv med en almindelig tæppekniv.

Materiale: Vinyl


Farve: Grå

Varenr. Item no.	Størrelse Size	Vægt Weight
38.5501110	610 x 18.300 x 9 mm	36 kg
38.5501210	910 x 18.300 x 9 mm	50 kg
38.5501310	* 1.220 x 18.300 x 9 mm	66 kg

Ergo Classic is a vinyl work mat with a ribbed surface that provides good slip resistance (it meets the R10 DIN 51130 standard for slip resistance). The mat's microcellular construction stimulates blood circulation in the feet and legs while providing good ergonomic support for the legs, back and hips. It is suitable for dry environments such as shops, warehouses and in front of work desks. Chamfered edges minimise the risk of tripping. Ergo Classic comes with a 3-year full wear warranty. Easy to fit even with a standard carpet cutter.

Material: Vinyl

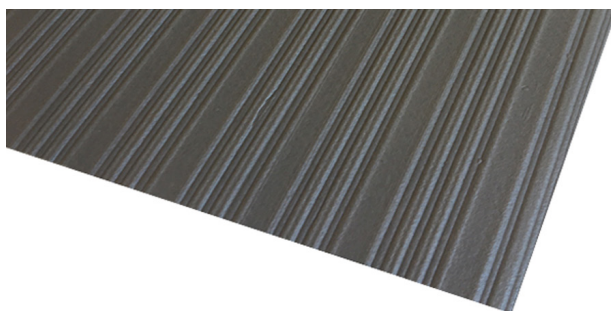Colour: Grey



Smudsmåtte, diamond Dirt trapper mat, diamond

Ekstrem slidstærk måtte med gummibagside og overside af groft mønstret polypropylengarn af højeste kvalitet. Skraber effektivt groft snavs væk og absorberer fugt. Den har en skrå gummikant, der tilbageholder snavs og reducerer risikoen for at snuble. Velegnet til både private og offentlige miljøer med stor trafik. Kan spules med højtryksrensere

Materiale: Polypropylen


Farve: Blå (måtten kan også skaffes i grå)

Varenr. Item no.	Størrelse Size	Vægt Weight
38.623752	600 x 900 x 9 mm	3 kg
38.623750	900 x 1.500 x 9 mm	6 kg
38.623764	* 1.200 x 1.800 x 9 mm	9 kg

Extremely durable mat with rubber backing and coarse patterned polypropylene yarn top of highest quality. Effectively scrapes away coarse dirt and absorbs moisture. It has chamfered edges that retains dirt and reduces the risk of tripping. Suitable for both domestic and high-traffic public environments. Can be washed with high-pressure cleaner.

Material: Polypropylen

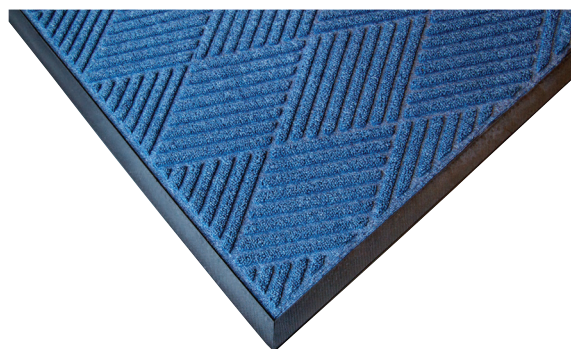Colour: Blue (the mat is also available in grey)



Vibrationsmatte

Sort, kommerciel gummiplade. Anvendes mellem maskiner og gulv for at minimere og optage vibrationer. Riller på begge sider. Bæreevne 5 kg/cm²

Materiale: NR/CR

Farve: Sort



Vibration mat

Black commercial rubber plate. To be used between machines and floor in order to minimize and absorb vibrations. Grooves on both sides. Carrying capacity of 5 kg/cm².

Material: NR/CR

Colour: Black

Varenr. Item no.	Tykkelse Thickness	Bredde Width	Længde Length	Indlæg Insertion	Hårdhed Hardness	Vægt Weight
37.400	8,5 mm	500 mm	500 mm	0	SH 45 - 50	5 kg / cm ²

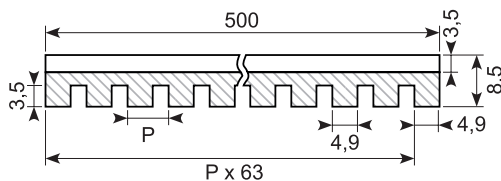



Komåtte Cow mat

Material: NR/SBR

★ Udgår når solgt

Discontinued when sold

Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thick- ness	Hårdhed Hard- ness	Densitet Density	Indlæg Insert- ion	Forlæn- gelse Elongation	Trækstyrke Tensile strength
38.440-6	2.000 mm	30.000 mm	6 mm	SH 65	1,35 g/cm ³	Nej No	250 %	5 MPa
38.440-6B	2.000 mm	30.000 mm	6 mm	SH 65	1,35 g/cm ³	Ja Yes	250 %	5 MPa
38.440-8	2.000 mm	30.000 mm	8 mm	SH 65	1,35 g/cm ³	Nej No	250 %	5 MPa
38.440-8X	1.250 mm	10.000 mm	8 mm	SH 65	1,45 g/cm ³	Ja Yes		4 MPa
38.440-8A	1.750 mm	21.000 mm	8 mm	SHA 65	1,45 g/cm ³	Ja Yes		4 MPa





Komåtte Cow mat

Material: NR/SBR

Overflade: cirkler uden indlæg, bund: ribbet i længderetning

Surface: circles without insert, bottom: ribbed in longitudinal direction.

Varenr. Item no.	Tykkelse Thickness	Bredde Width	Længde Length
37.260	10 mm	2.000 mm	20.000 mm
37.260B	10 mm	2.400 mm	7.410 mm
37.260C	10 mm	2.400 mm	10.000 mm





Komåtte Cow mat

Material: NR/SBR

Overflade: cirkler uden indlæg, bund: ribbet i længderetning


Surface: circles without insert, bottom: ribbed in longitudinal direction.

Varenr. Item no.	Tykkelse Thickness	Bredde Width	Længde Length
37.263	16 mm	2.150 mm	10.000 mm




Trailermatte Trailer mat

Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Hårdhed Hardness	Densitet Density	Arbejds- temperatur Working temperature	Trækstyrke Tensile strength
38.423-1750	★ 1.750 mm	21.000 mm	8 mm	SH 65	1,4 g/cm ³	-25 +70 °C	12 MPa
38.424-1800	★ 1.800 mm	21.000 mm	8 mm	SH 65	1,4 g/cm ³	-25 +70 °C	12 MPa



Blød transparent PVC Soft transparent PVC

Varenr. Item no.	Tykkelse Thickness	Bredde Width	Længde Length	Farve Colour
38.449-750 *	3 mm	750 mm	20.000 mm	
38.449-1200	3 mm	1.200 mm	20.000 mm	Klar Clear
38.449-1600	3 mm	1.600 mm	20.000 mm	Blåtonet Blue tinted
38.450-760 *	4 mm	760 mm	13.000 mm	
38.451-1600	5 mm	1.600 mm	10.000 mm	Blåtonet Blue tinted
38.452-1200 *	7 mm	1.200 mm	10.000 mm	

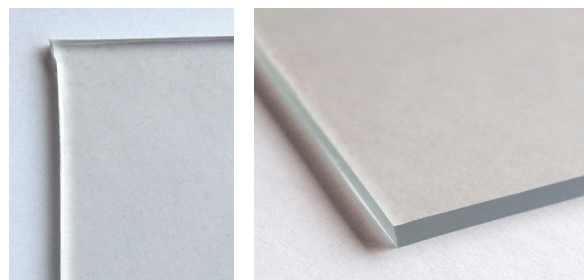


Polyurethanplader Polyurethane plates

Bredde Width: 2.000 mm

Længde Length: 1.000 mm

Varenr. Item no.	Tykkelse Thick- ness	Hårdhed Hard- ness	Densitet Density	Forlængelse Elongation	Trækstyrke Tensile strength	Rivstyrke Tear strength	Arbejds- temperatur Working temperature
38.430-3/70	3 mm	SH 70	1,25g/cm ³	400-450%	40 MPa	40 KN/m	-30 +80 °C
38.430-5/70	5 mm	SH 70	1,25 g/cm ³	500-600%	30 MPa	50 KN/m	-50 +100 °C
38.430-5/80 *	5 mm	SH 80	1,25 g/cm ³	450-500%	35 MPa	35 KN/m	-50 +100 °C
38.430-8/70	8 mm	SH 70	1,25 g/cm ³	500-600%	30 MPa	50 KN/m	-50 +100 °C
38.430-8/90	8 mm	SH 90	1,25 g/cm ³	400-450%	40 MPa	90 KN/m	-50 +100 °C
38.430-10/70	10 mm	SH 70	1,25 g/cm ³	500-600%	30 MPa	50 KN/m	-50 +100 °C
38.430-6/90 *	10 mm	SH 90	1,25 g/cm ³	400-450%	40 MPa	90 KN/m	-50 +100 °C
38.430-10/90	10 mm	SH 90	1,25 g/cm ³	400-450%	40 MPa	90 KN/m	-50 +100 °C



Anti-slip plade Anti-slip plate

Material: Gummigranulat Rubber granules.

Varenr. Item no.	Tykkelse Thickness	Bredde Width	Længde Length	Min. ordre
38.14572	8 mm	500 mm	5.000 mm	1 rulle
38.14574	5 mm	1.250 mm	10.000 mm	1 rulle
38.14574/3	3 mm	1.250 mm	10.000 mm	1 rulle



38.9971010

Græsmåtte, grå
Grass mat, grey
900 mm x 16 m



*

Græsmåtte, grøn
Grass mat, green
900 mm x 16 m




*

Semperit

Colour: Sort *Black*


Varenr. Item no.	Bredde Width	Længde Length	Tykkelse Thickness	Materiale Material	Hårdhed Hardness	Indlæg Insertion
38.1215N	1.400 mm	20.000 mm	1,5 mm	Nitril	SH 65	1
38.1215	1.400 mm	10.000 mm	1,5 mm	NR / SBR		



Gummikork *Rubber cork*

Material: NR / NBR / NR-SBR

Varenr. Item no.		Størrelse Size	Tykkelse Thickness	Kvalitet Quality	Min. ordre
38.201.5	*	1.000 x 1.000	1,5	1.235	100 m ²
38.202	*	1.000 x 1.000	2	1.235	75 m ²
38.203	*	1.000 x 1.000	3	1.235	50 m ²
38.205	*	1.000 x 1.000	5	1.235	30 m ²

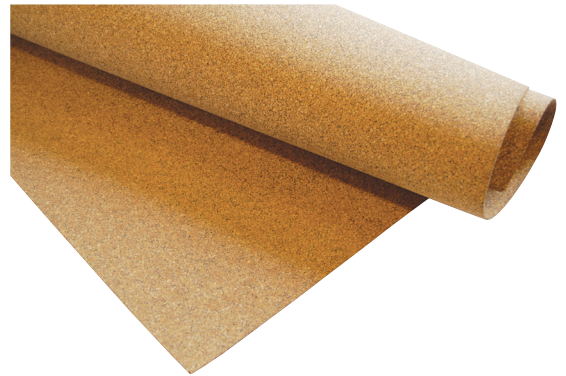

50.241NR

T-strop. Materiale: NR. Længde: 150 mm
T-strap. Material: NR. Length: 150 mm



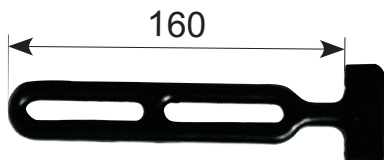
50.242NR

T-stige. Materiale: NR. Længde: 250 mm
T-strap. Material: NR. Length: 250 mm




50.245NR

T-stige med to huller. Materiale: NR. Længde: 160 mm
Strap with two holes. Material: NR. Length: 160 mm



50.245H

T-stige med 2 huller. Materiale: Hvid EPDM. Min. 400 stk. *
Længde: 160 mm
Strap with 2 holes. White EPDM. Length: 160 mm. Min. 400 pcs



50.265

Lille kombi-strop. Materiale: EPDM. Længde: 280 mm
Short strap. Material: EPDM. Length: 280 mm



50.246NR

T-stige med tre huller. Materiale: NR. Længde: 285 mm
Strap with three holes. Material: NR. Length: 285 mm



50.266

Gummistrop, kombi. Materiale: EPDM. Længde: 360 mm
Rubber strap, combi. Material: EPDM. Length: 360 mm.



50.247NR

Gummistrop, kombi. Materiale: NR.
Længde: 365 mm / 370 mm
Rubber strap, combi. Material: NR. Length: 365 mm / 370 mm



50.250

Stigestrop. Rulle på 10 m.
Materiale: SBR.
Bredde: 30 mm,
Hul: 55 mm, Trin: 11 mm
Tarpaulin strap. Rulle på 10 m.
Materiale: SBR. Width: 30 mm,
Hole: 55 mm, Step: 15 mm



50.250X


Stigestrop.
Rulle på 10 m.
Materiale: NR.
Bredde: 27.5 mm,
Hul: 55.5 mm, Trin: 11.5 mm
Tarpaulin strap. Rulle på 10 m.
Materiale: NR.
Width: 27.5 mm, Hole: 55.5
mm, Step: 11.5 mm



50.275 Stige POP. Materiale: EPDM. Længde: 200 mm Strap POP. Material: EPDM. Length: 200 mm 	50.276 Stige POP. Materiale: EPDM. Længde: 275 mm Strap POP. Material: EPDM. Length: 275 mm 
50.261 Strop, Ø8. Materiale: EPDM. Længde: 200 mm Strap, Ø8. Material: EPDM. Length: 200 mm 	50.244NRS 4-stige. Materiale: NR. Længde: 290 mm Strap, 4-holes. Material: NR. Length: 290 mm 
50.271 Presenningstrop. Materiale: EPDM. Længde: 270 mm Strap. Material: EPDM. Length: 270 mm 	50.244NR 4-stige. Materiale: NR. Længde: 260 mm Strap, 4-holes. Material: NR. Length: 260 mm 
50.269 Rund gummistrop. Materiale: EPDM. Ø106 / Ø86. Round strap. Material: EPDM. Ø106 / Ø86. 	50.263 Oval strop, Ø7. Materiale: EPDM. Længde: 200 mm Oval strap, Ø7. Material: EPDM. Length: 200 mm 
50.243NR Oval strop. Materiale: NR. Længde: 280 mm Oval-shaped strap. Material: NR. Length: 280 mm 	50.267-10 Strop. Materiale: NR. Længde: 400 mm. Udgår. Strap. Material: NR. Length: 400 mm. Discontinued. 
50.267NR Strop, oval. Materiale: NR. Længde: 400 mm Strap oval. Material: NR. Length: 400 mm 	50.267 Oval strop. Materiale: EPDM. Længde: 400 mm Oval strap. Material: EPDM. Length: 400 mm 
50.263K Oval strop med krog. Materiale: EPDM. Længde: 200 mm Løs krog: 50.263KL Oval strap with hook. Material: EPDM. Length: 200 mm Loose hook: 50.263KL 	50.263K-10 Oval strop med krog. Materiale: NR. Længde: 204 mm Udgår Oval strap with hook. Material: NR. Length: 204 mm Discontinued 


50.252J

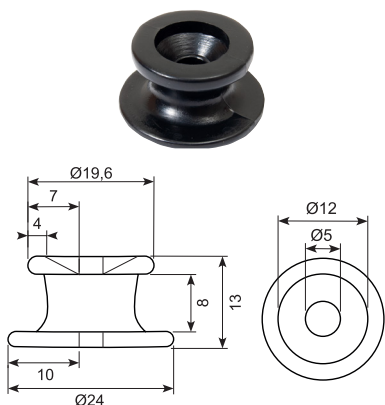HDPE plast fæsteknob, sort.
100 stk. (Grå: 50.252G).
HDPE plastic fastening knob, black.
100 pcs. (Grey: 50.252G).




50.254J

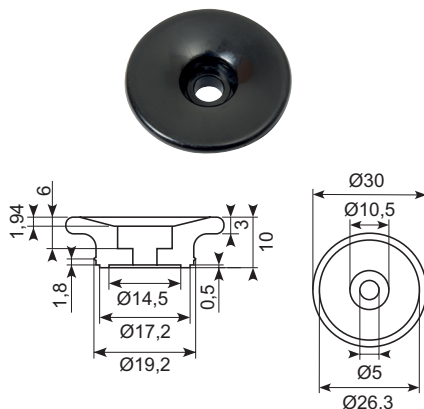Sort PE fæsteknob. 1.000 stk. *
i pose. LDPE. Min. 50.000 stk.
Black LDPE knob. 1.000 pcs. per bag.
LDPE. Min.: 50.000 pcs.



50.255J

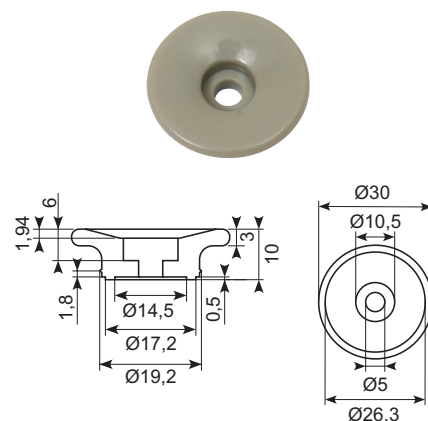Grå PE fæsteknob. 1.000 stk.
i pose. LDPE.
Grey PE knob. 1.000 pcs. per bag. LDPE.



Bagagerem Luggage strap



Varenr. Item no.	Mål Measure
79.051	600 mm
79.051A *	700 mm
79.052	900 mm
79.053	1.250 mm
79.054	1.750 mm
79.054A *	2.800 mm
79.055	3.000 mm
79.056 *	6.000 mm

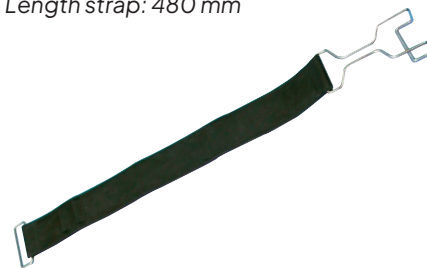
50.13621

Campingstrop med krog / øje.
20 x 490 mm.
Camping strap with hook / eye.
20 x 490 mm.



50.280

Gummistrop til f.eks. transportbure.
Total længde: 610 mm
Længde strop: 480 mm
Rubber strap for e.g. transport boxes.
Total length: 610 mm
Length strap: 480 mm




Gummistrop med kroge



Varenr. Item no.	Mål Measure	L = længde	Anbefalet max længde	Vejl. pris
79.001	10" gummistrop med kroge	254 mm	457,2	DKK 11,00
79.002	15" gummistrop med kroge	381 mm	685,8	DKK 14,00
79.003	21" gummistrop med kroge	533,4 mm	914,4	DKK 17,00
79.004	31" gummistrop med kroge	787,4 mm	1.371,6	DKK 23,00
79.005	41" gummistrop med kroge	1.041,4 mm	1.676,40	DKK 30,00



39.BUMPER

Type A. Sort og gul.
1.000 mm lang.
Selvklæbende.
Type A. Black and yellow.
1.000 mm long.
Adhesive.




39.BUMPERB

Type B. Sort og gul.
1.000 mm lang.
Selvklæbende.
Type B. Black and yellow.
1.000 mm long.
Adhesive.




39.BUMPERC

Type C. Sort og gul.
1.000 mm lang.
Selvklæbende.
Type C. Black and yellow.
1.000 mm long.
Adhesive.



39.BUMPERD

Type D. Sort og gul.
1.000 mm lang.
Selvklæbende.
Type D. Black and yellow.
1.000 mm long.
Adhesive.



52.PPCC720



Orange trafikkegle, 690 mm. Sammenklappelig.
Ekskl. topblink 52.PPTLRED.
Orange traffic cone, 690 mm. Foldable.
Excl. warning light 52.PPTLRED.

*

52.PPTLRED



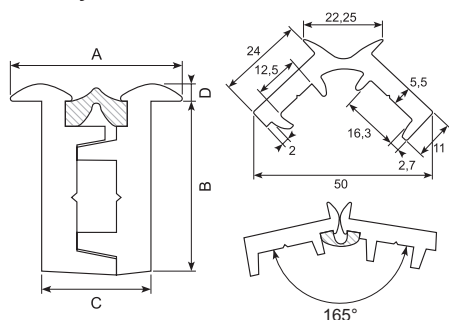
Rød advarselsblink for trafikkegle 52.PPCC720
Red warning light for traffic cone 52.PPCC720

*

Centraflex

Vandtæt stanghængsel med polyesterkerne og PVC-flanger. Tillader 165° / 180° åbning. Stor styrke og høj elasticitet. Sort finish.

Waterproof continuous hinge with polyestercore and synthetic flanges. 165°/180° opening. High strength and excellent flexibility. Black finish.




Varenr. Item no.	A	B	C	D	L
20.6020 *	28 mm	23 mm	16 mm	4 mm	2.000 mm
20.6025	28 mm	23 mm	16 mm	4 mm	2.500 mm
20.6030	28 mm	23 mm	16 mm	4 mm	3.000 mm

Poliall

Vandtæt poliall stanghængsel. Med P-kerne og aluminiumsflanger. Tillader 180° åbning.


Forboret med 5 mm huller i flange.

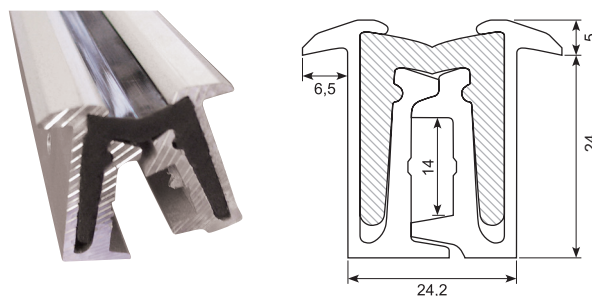Waterproof poliall continuous hinge. PU core and aluminium flanges. Pre-drilled with 5 mm holes in flange. Can open 180°.




Varenr. Item no.	B	Længde Length
54.261100 *	24 mm	2.400 mm
54.261120 *	24 mm	2.700 mm
54.261130 *	24 mm	4.000 mm

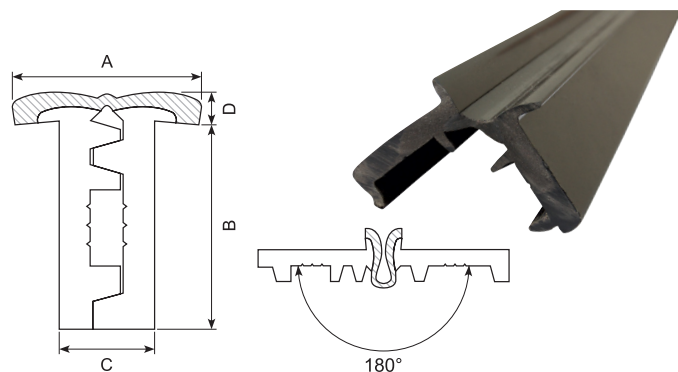Centraflex




Varenr. Item no.	A	B	C	D	L
20.6120 *	30 mm	34 mm	16 mm	4,5 mm	2.000 mm
20.6125	30 mm	34 mm	16 mm	4,5 mm	2.500 mm
20.6130 *	30 mm	34 mm	16 mm	4,5 mm	3.000 mm

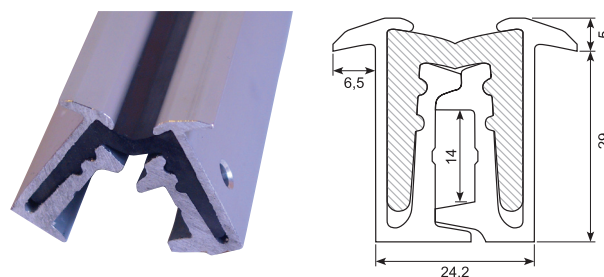Poliall



Varenr. Item no.	B	L
54.261700J-5	29 mm	2.400 mm
54.261720J-5	29 mm	2.700 mm
54.261740J-5	29 mm	3.000 mm
54.261760J-5	29 mm	3.200 mm
54.261780J-5	29 mm	4.000 mm

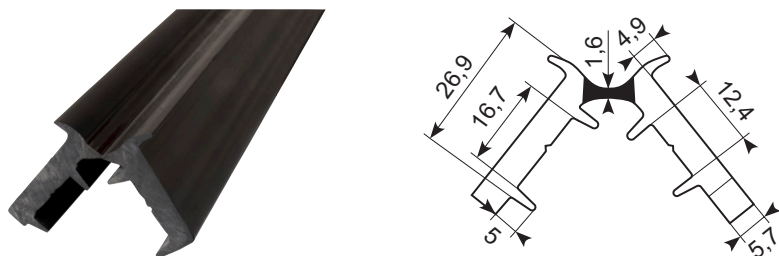Fleksibel hængsel Flexible hinge





Varenr. Item no.	A	B	C	D	L
20.6019J *	26,5 mm	25 mm	16,7 mm	2,5 mm	1.678 mm
20.6020J	26,5 mm	25 mm	16,7 mm	2,5 mm	2.000 mm
20.6025J	26,5 mm	25 mm	16,7 mm	2,5 mm	2.500 mm
20.6030J	26,5 mm	25 mm	16,7 mm	2,5 mm	3.000 mm

* Skaffevare: Min. 1.000 stk. Special order item: min. 1.000 pcs.


● Speciallængde med huller Special length with holes



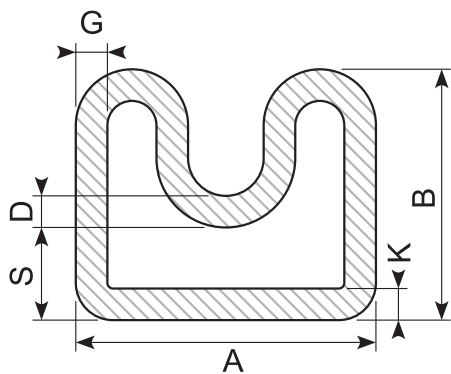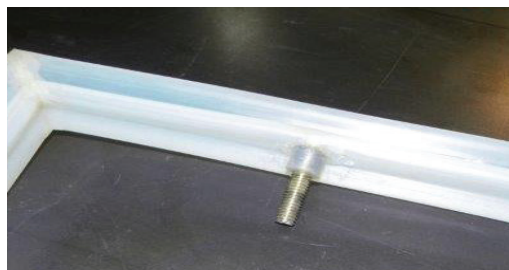
* Skaffevare Special order item



Varenr. Item no.		A mm	B mm	D mm	G mm	K mm	S mm	Materiale Material	Hårdhed Hardness
30.0192-11800	*	10	10	1,5	2	2	5	Silicone	SH 60
30.0192-2819	*	16	14	1,8	1,8	1,8	4,9	Silicone	SH 65
30.0192-4756	*	16	17	1,5	1,5	1,5	10	Silicone	SH 60
30.0192-10963	*	17	14	2	2	2	5	Silicone	SH 60
30.0192-3375	*	18	15,5	2	2	2	2	Silicone	SH 60
30.0192-3161	*	18	15,5	2	2	2	6	Silicone	SH 60
30.0192-4588	*	18,5	17	2	2	2	9	Silicone	SH 60
30.0192-4733	*	18,7	18/16,6	2	2	2	7,9	Silicone	SH 60
30.0192-12642	*	21	15	2	2	2	8	Silicone	SH 60
30.0192-4947	*	22	16	3	3	3	6	Silicone	SH 60
30.0192-3877	*	24	20	2,5	2,5	2,5	5	Silicone	SH 60
30.0192-10680	*	25,3	20	2,7	2,7	2,7	7,3	Silicone	SH 60
30.0192-4633	*	26	20	3	3	3	8,2	Silicone	SH 60
30.0192-11007	*	26	20	3	3	3	8,5	Silicone	SH 60
30.0192-10927	*	26,5	20	3	3	3	9	Silicone	SH 60
30.0192-4926	*	27	20	4	4	4	10	Silicone	SH 60
30.0192-10322	*	30	15	3	3	3	3,7	Silicone	SH 60
30.0192-4634	*	35	32	5	5	5	17,6	Silicone	SH 60
30.0192-11484	*	35	34	3	3	3	17	Silicone	SH 60
30.0192-12418	*	45	34	3	3	5	9	Silicone	SH 60
30.0192-11016	*	46	34	3	3	5	9	Silicone	SH 60


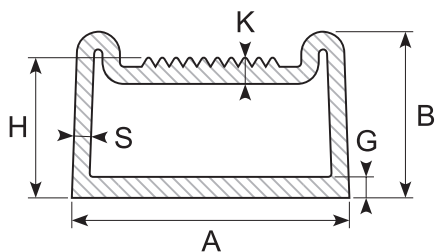



Varenr. Item no.		A mm	B mm	D mm	G mm	K mm	S mm	Materiale Material	Hårdhed Hardness
30.0192-3414	*	8,6	8,3	1,2	7,5	1,4	1,2	Silicone	SH 60
30.0192-4906	*	12	8	1,2	6,3	1,5	1,2	Silicone	SH 60
30.0192-3415	*	12	8,5	1,2	7,7	1,4	1,2	Silicone	SH 60
30.0192-4792	*	16	7,5	1,2	7	1,5	1	Silicone	SH 60
30.0192-3214	*	16	9,5	1,2	8	1,5	1	Silicone	SH 76
30.0192-2076	*	16	10	2	10	2,5	1	Silicone	SH 50
30.0192-11527	*	17	8,5	1,2	7	1,5	1	Silicone	SH 60
30.0192-3739	*	17	8,5	1,5	7	2	1	Silicone	SH 76
30.0192-2969	*	17	9,5	1,2	8	1,5	1	Silicone	SH 76
30.0192-10966	*	30	30,3	4	33,5	9,9	4	Silicone	SH 60

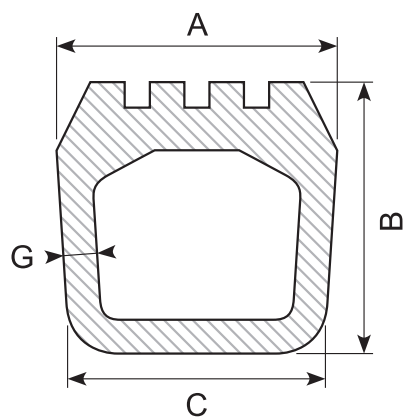

Varenr. Item no.		A mm	B mm	C mm	G mm	Hårdhed Hardness	Varenr. Item no.		A mm	B mm	C mm	G mm	Hårdhed Hardness
30.0192-11093	*	13,6	10	13,6	2	SH 55	30.0192-3365	*	14	10	14	2	SH 60
30.0192-12442	*	14	10	14	1,7	SH 50	30.0192-2845	*	14	11	13	2	SH 60
30.0192-11137	*	14	14	14	3	SH 60	30.0192-1494	*	14	11	14	2/2,25	SH 60
30.0192-4973	*	15,2	13,6	16,2	2	SH 55	30.0192-2029	*	14	14	15,5	2,5	SH 50
30.0192-10389	*	16	12	16	2	SH 60	30.0192-3616	*	15,5	18	15,5	2	SH 60
30.0192-10519	*	16	12	16	2	SH 60	30.0192-3588	*	16	14	16	2	SH 60
30.0192-10142	*	16	12	16	2,5	SH 60	30.0192-1345	*	16	18	16	2,5	SH 50
30.0192-11278	*	17	9	17	2	SH 55	30.0192-0374	*	16	20	15	2,5	SH 50
30.0192-10358	*	21	24	21	3	SH 60	30.0192-2408	*	16,5	13	16,5	2,5	SH 55
30.0192-11937	*	22	20	22	3	SH 60	30.0192-2067	*	16,5	16	15	2	SH 55
30.0192-11342	*	32,5	32	35	5	SH 60	30.0192-0459	*	17	18	15	2,5	SH 50
30.0192-11385	*	33,5	30	35	5	SH 60	30.0192-0460	*	17	18	17	3,5	SH 50
30.0192-11991	*	33,7	32	33,7	5	SH 60	30.0192-1949	*	17,5	20	17,5	3	SH 45
30.0192-4626	*	34	25	34	5	SH 60	30.0192-1768	*	27	19	27	3,5	SH 50
30.0192-11550	*	34	35	35	5	SH 70	30.0192-3497	*	27,5	25	27,5	3	SH 60
30.0192-10318	*	35	31	35	4,5	SH 65	30.0192-3551	*	33,5	32	35	5	SH 60
30.0192-12300	*	35	31,5	35	5	SH 60	30.0192-0431	*	34	35	35	5	SH 60
30.0192-3900	*	35	32	35	5	SH 60	30.0192-3845	*	35	32	35	4	SH 60
30.0192-4690	*	35	32	35	4,5	SH 60	30.0192-2364	*	35	32	35	5	SH 60
30.0192-10947	*	35	32	35	3,3	SH 55	30.0192-1744	*	35	33	35	5,5	SH 55
30.0192-12465	*	35	33	35	4	SH 60	30.0192-1881	*	36	26,9	36	5	SH 55
30.0192-12398	*	35	35	35	4,3	SH 60	30.0192-3693	*	53	41,5	53	5	SH 60

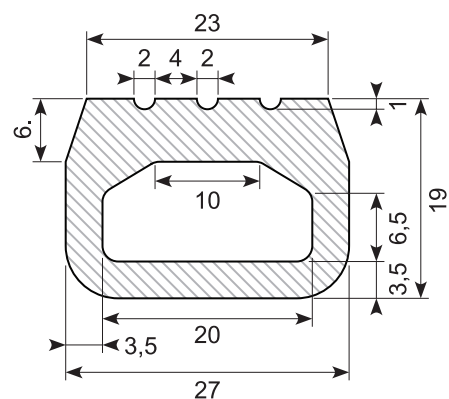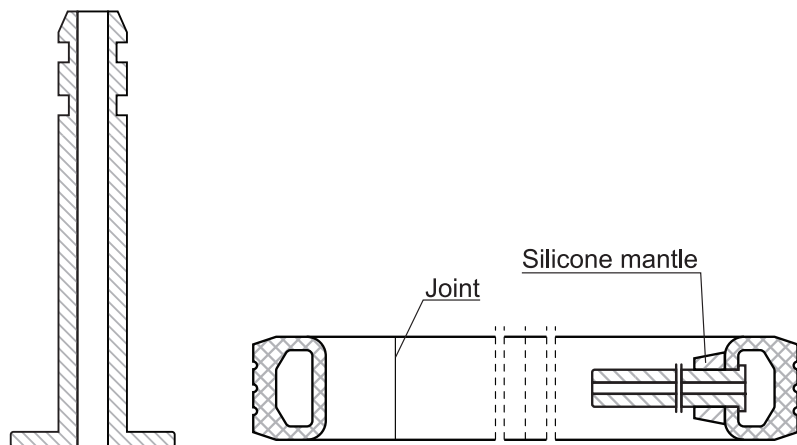Ventil eksempel Valve example



84.930	84.931	84.932T	
 Rudeværktøjssæt med værktøj til låseliste, Ø9,5 mm trådøje og monteringsjern. Window tool set with tool for locking strip, Ø9.5 mm wire eye and mounting iron.	 Værktøj til låseprofiler, aluminium. Inkl. Ø9,5 mm trådøje. Tool for locking profiles, aluminum. Incl. Ø9.5 mm wire eye.	 Monteringsjern til rudelister Mounting bracket for glazing sections	
84.935	84.934A	84.934	
 Løst trådøje til 84.931, Ø10,5 mm. Loose wire eye for 84.931, Ø10,5 mm.	 Løst trådøje til 84.931, Ø6 mm. Loose wire eye for 84.931, Ø6 mm.	 Løst trådøje til 84.931, Ø9,5 mm. Loose wire eye for 84.931, Ø9,5 mm.	
30.shoreA	30.shoreD	30.shore20-90	
 Shore A hårdhedsmåler Shore A hardness tester	 Shore D hårdhedsmåler Shore D hardness tester	 Shore tester, silikonegummi Shore samples, silicone rubber.	

87.770/10  Primer loctite SF 770 – forbedrer klæbeevnen på materialer, der er svære at lime. Primer loctite SF 770 – improves adhesion on difficult to bond materials.	87.1034  Sekundlim Permalock, 3 g. Velegnet til EPDM Super glue Permalock, 3 g. Suitable for EPDM	87.1035  Sicomet Sekundlim, 20 gr. Velegnet til svampegummi Sicomet super glue, 20 gr. Suitable for sponge rubber.	87.1035  Tec7 Super Lim, 10 ml. Velegnet til gummilister. Tec7 super glue, 10 ml. Suitable for rubber profiles
87.2010  SikaFast 2590 – en hurtighærdende og spalteudfyldende tokomponent universal lim”, 10 ml. A fast curing and gap-filling two-component Universal Glue	87.723  Spraylim, Loctite 9323 Spray glue. Loctite 3923.	87.705I  Terokal 2444, 340 g. CR-klæbestof til limning af bl.a. svampegummi, lyddæmpningsmaterialer m.m. Terokal 2444, 340 g. CR adhesive for bonding sponge rubber, soundproofing materials, etc.	
87.52759 / 87.52759X  Terostat 2759, 310 ml, grå. Enkomponent tætningsstof til tætning mellem gummi og metal. Terostat 2759, 310 ml, grey. One-component sealant for sealing between rubber and metal. 87.52759X: Foliepose Foil bag, 570 ml	87.51989 / 87.51999F  Terostat 930, 310 ml, sort. Elastisk og stærk tætningsmasse for metal, glas og gummi. Terostat 930, 310 ml, black. Elastic and strong sealant for metal, glass and rubber. 87.51999F: Foliepose Foil bag, 570 ml	87.51939S  Teroson MS 939, 290 ml, sort. Til elastisk limning med høj styrke, som absorberer vibrationer. Teroson MS 939, 290 ml, black. For high-strength elastic bonding that absorbs vibrations. Min order: 12 pcs.	

Butylbånd

Varenr. Item no.	Beskrivelse Description
87.81152	Terostat 81 - 15 x 2 mm, 30 m
87.812015	Terostat 81 - 20 x 1,5 mm, 40 m
87.81252	Teroson RB 81 - 25 x 2 mm, 35 m
87.81302	Terostat 81 - 30 x 2,0 mm, 30 m
87.814015	Terostat 81 - 40 x 1,5 mm, 40 m



Egenskaber gummityper NR, SBR, NBR, CR og EPDM Properties rubber types NR, SBR, NBR, CR and EPDM

Navnefortegnelse i.h.t. ASTM D 1418 Abbreviation as per ASTM D 1418	NR	SBR	NBR	CR	EPDM
Kemisk betegnelse Chemical nomenclature	Natur-kautsjuk Natural rubber	Styrolbutadien kautsjuk Styrol butadien rubber (Buna)	Nitril kautsjuk (Perbunan) Nitril rubber (Perbunan)	Chlororen kautsjuk (Neopren) Chloroprene rubber (Neoprene)	Ethylen propylen kautsjuk (APTK) Ethylene propylene dien rubber
Hårdhedsområde (Shore A)(±5) Hardness range (Shore A)(±5)	40 - 90	45 - 90	45 - 90	40 - 90	40 - 90
Trækstyrke N/mm² Tensile strength N/mm²	4 - 15	4 - 15	4 - 14	5 - 15	6 - 13
Tilbagestådselasticitet ved 20°C Recoil elasticity at 20°C	Udmærket Excellent	God Good	Tilfredsstillende Satisfactory	God Good	God Good
Slidstyrke Abrasion resistance	Meget god Very good	Meget god Very good	God Good	God Good	God Good
(1) Kemisk bestandighed Chemical resistance	God Good	God Good	Tilfredsstillende Satisfactory	God Good	Meget god Very good
(1) Oliebestandighed Oil resistance	Ringe Low	Ringe Low	Udmærket Excellent	God Good	Ringe Low
(1) Bestandighed overfor benzin Petrol resistance	Ingen None	Ringe Low	God Good	Ringe Low	Ringe Low
(1) Bestandighed overfor opløsningsmidler Solvent resistance	Ringe Low	Ringe Low	God Good	God Good	(3) Tilfredsstillende Satisfactory
(4) Temperaturbestandighed °C Temperature resistance °C	-40 / +80°C	-30 / +80°C	-30 / +100°C	-25 / +100°C	-40 / +100°C
Ozonbestandighed Ozone resistance	Tilfredsstillende Satisfactory	Tilfredsstillende Satisfactory	Tilfredsstillende Satisfactory	Meget god Very good	Udmærket Excellent
Vejrbestandighed Weather resistance	God Good	God Good	God Good	Meget god Very good	Udmærket Excellent
Gasugennemtrængelighed Gas impermeability	Tilfredsstillende Satisfactory	Tilfredsstillende Satisfactory	God Good	God Good	Tilfredsstillende Satisfactory
(2) Modstand mod blivende deformering Resistance to permanent deformation	Meget god Very good	God Good	God Good	God Good	God Good
Bindekraft til metal Adhesion to metal	Udmærket Excellent	Meget god Very good	Tilfredsstillende Satisfactory	God Good	Tilfredsstillende Satisfactory
Bindekraft til tekstiler Adhesion to textile	Udmærket Excellent	God Good	Tilfredsstillende Satisfactory	Udmærket Excellent	Tilfredsstillende Satisfactory

Egenskaber plasttyper POM og PVC Properties plastic types POM and PVC

Navnefortegnelse Abbreviation	POM	PVC
Kemisk betegnelse Chemical nomenclature	Polyoxymethylene	Polyvinylchlorid
(1) Kemisk bestandighed Chemical resistance	God Good	God Good
(1) Oliebestandighed Oil resistance	Meget god Very good	God Good
(1) Bestandighed overfor benzin Petrol resistance	Meget god Very good	Ingen None
Ozonbestandighed Ozone resistance	Ingen None	Meget god Very good
Svovlsyre bestandighed Sulfuric acid resistance	Ingen None	Ingen None
(4) Temperaturbestandighed °C Temperature resistance °C	Ca. -40 / +100°C	Ca. -10 / +60°C
Egenskaber Properties	Gode mekaniske egenskaber, slidbestandig, dimensionsstabil Good mechanical properties, abrasion resistant, dimensionally stable	God mekanisk vurdering, god svejse/vedhæft egenskaber, bliver hårdere i benzin og olie Good mechanical rating, good welding/adhesion properties, hardens in petrol and oil

Egenskaber plasttype TPE Properties plastic type TPE

Type og kvalitet Type and quality	TPE (gennemsigtig) TPE (transparent)	TPE (normal)
Kemisk betegnelse Chemical nomenclature	Termoplastiske elastomerer	
Hårdhed Hardness	55 Sh A - 50 Sh D	60 Sh A - 50 Sh D
Temperaturbestandighed °C Temperature resistance °C	-50 til +125°C	-50 til +125°C
Egenskaber Properties	Fremragende vejrbestandighed. God kemisk bestandighed (undtagen ved organisk opløsningsmiddel, aromatiske- og vegetabiliske olier). Excellent weather resistance. Good chemical resistance (except for organic solvent, aromatic and vegetable oils).	

(1) På grund af mange mulige kemikalier, opløsningsmidler, arbejdstemperaturer og arbejdstider kan de oplyste værdier i enkelte tilfælde udvise forandringer. Især kan en elastomeretype, som normalt udviser ringe bestandighed, udvise en meget god resistens overfor bestemte medier.
In view of the multitude of chemicals, solvents, application temperatures and times, the value quoted may vary in some cases. For example one type of elastomer, which normally has only low resistance properties, could show very good resistance to certain media.

(2) Ved relativt lave hhv. høje temperaturer reduceres modstanden normalt. At relatively high or low temperatures, resistance generally drops.

(3) God udvidelsesbestandighed overfor forskellige blødgørere. Good expansion resistance to various ester based plasticizers.

(4) Det drejer sig om grænseværdier, som kan svinge alt efter sammensætningen af blanding. Vedvarende indsætning i grænseområderne ændrer de fysiske værdier. Til ekstreme påvirkninger kræves særlige elastomerblandinger.
These are borderline values which, depending on composition of the mixture, can vary. If used permanently in such borderline areas, this can lead to a change in the physical values. For such extreme applications it is advisable to use special elastomer mixtures.

Egenskaber silikone *Properties silicone*

Egenskaber <i>Properties</i>	
Arbejdstemperatur (standarddele) Working temperature (standard compounds)	-50°C to +180°C / +250°C
Arbejdstemperatur (specialdele) Working temperature (specific compounds)	-90°C / +315°C
Forlængelse Elongation	300 - 800%
Hårdhed Hardness	25 - 80 SHA
Sammenbrudsspænding Breakdown voltage	23 kV (VDE 0303)
Materialer til specifikke applikationer Materials for specific applications	Høj kemikalie resistens. God dæmpning af høj- og lavfrekvent vibrationer. Silikonegummi-produkter er smagløse og lugtfrie. Modstandsdygtig over for aldring og vejrforhold <i>High chemical resistance. Good damping of high and low frequency vibrations. Silicone rubber products are tasteless and odourless. Resistance to ageing and weather conditions.</i>
Farver Colors	Farven på silikoneprodukter kan vælges til en given applikation: Fra gennemsigtig til sort i overensstemmelse med RAL, inklusiv metalfarver (aluminium, stål, messing). Farverne er kendetegnet ved livlighed og holdbarhed. <i>The colour of silicon products can be suitably chosen for the particular application: from transparent to black, in accordance to RAL, including metallic colours (aluminium, steel, brass). The colours feature of vividness and durability</i>

Tolerancer for ekstruderede profiler *Tolerances for extruded profiles*

Dimensionstolerancer for støbte, ekstruderede og kalandrerede massive gummi produkter. (GB/T 3672-92) ISO3302-1998. <i>Dimensional tolerances for moulded, extruded and calendered solid rubber products. (GB/T 3672-92) ISO3302-1998.</i>			
Gummitykkelse <i>Rubber thickness</i>	E1 ±	E2 ± Solid	E3 ± Svampegummi <i>Spongerubber</i>
0 - 1,5 mm	0,15 mm	0,25 mm	0,4 mm
1,5 - 2,5 mm	0,2 mm	0,35 mm	0,5 mm
2,5 - 4 mm	0,25 mm	0,4 mm	0,65 mm
4 - 6,3 mm	0,35 mm	0,5 mm	0,8 mm
6,3 - 10 mm	0,4 mm	0,65 mm	1 mm
10 - 16 mm	0,5 mm	0,8 mm	1,3 mm
16 - 25 mm	0,65 mm	1 mm	1,6 mm
25 - 40 mm	0,8 mm	1,3 mm	2 mm
40 - 63 mm	1 mm	1,6 mm	2,5 mm
63 - 100 mm	1,3 mm	2 mm	3,2 mm

Længdetolerancer for afkortede profiler *Length tolerances for shortened profiles*

Længdetolerancer for massive gummi profiler DIN 7715-L2 <i>Solid rubber profile length tolerances DIN 7715-L2</i>				
Nominelt område <i>Nominal range</i>				± mm
Fra <i>From</i>	0 mm	Til <i>To</i>	40 mm	1,0
Over	40 mm	Til <i>To</i>	63 mm	1,3
Over	63 mm	Til <i>To</i>	100 mm	1,6
Over	100 mm	Til <i>To</i>	160 mm	2,0
Over	160 mm	Til <i>To</i>	250 mm	2,5
Over	250 mm	Til <i>To</i>	400 mm	3,2
Over	400 mm	Til <i>To</i>	360 mm	4,0
Over	630 mm	Til <i>To</i>	1.000 mm	5,0
Over	1.000 mm	Til <i>To</i>	1.600 mm	6,3
Over	1.600 mm	Til <i>To</i>	2.500 mm	10,0
Over	2.500 mm	Til <i>To</i>	4.000 mm	12,5
Over	4.000 mm	Til <i>To</i>		0,32%

20.6019J	122	30.0192-4947	123	30.118E	33	30.216S	34	30.7933	35
20.6020	122	30.0192-4973	124	30.118NBR	33	30.218S	35	30.7935	35
20.6020J	122	30.10003K	34	30.11911	53	30.220L	35	30.798	39
20.6025	122	30.10005E	34	30.119E	33	30.22381	55	30.7987	52
20.6025J	122	30.10036	41	30.1201KE	34	30.2310E	34	30.8199	37
20.6030	122	30.101.25	33	30.120CR	33	30.2438	39	30.8199W	37
20.6030J	122	30.101.5	33	30.120E	33	30.2455	52	30.8331	39
20.6120	122	30.101	33	30.120NBR	33	30.2505E	34	30.8439	57
20.6125	122	30.102	33	30.121E	33	30.2566	36	30.8469	35
20.6130	122	30.102E	33	30.122CR	33	30.257S	37	30.8538	56
30.0192-0374	124	30.102NBR	33	30.122E	33	30.262S	34	30.8538B	56
30.0192-0431	124	30.103.5CR	33	30.122NBR	33	30.2653	37	30.9215	41
30.0192-0459	124	30.103.5NBR	33	30.124E	33	30.2984-1	53	30.9387-1	41
30.0192-0460	124	30.103CR	33	30.125CR	33	30.2984-2	53	30.9387-2	40
30.0192-10142	124	30.103E	33	30.125E	33	30.2984-3	53	30.9437-125	41
30.0192-10318	124	30.103EX	33	30.125NBR	33	30.2984-5	53	30.9437-160	42
30.0192-10322	123	30.103NBR	33	30.12759	34	30.2984-6	53	30.9437-200	42
30.0192-10358	124	30.103SIH	33	30.12896	52	30.3003E	34	30.9437-250	42
30.0192-10389	124	30.104.5CR	33	30.12932-1	52	30.3006E	34	30.9437-315	42
30.0192-10519	124	30.104.5E	33	30.12932-2	40	30.313	37	30.9437-400	42
30.0192-10680	123	30.104.5NBR	33	30.12957-2	35	30.314S	37	30.9519	52
30.0192-10927	123	30.10461-2	41	30.12957-3	36	30.315S	37	30.9548	50
30.0192-10947	124	30.10485	40	30.13049-1	40	30.315SB	38	30.9691-3	36
30.0192-10963	123	30.104CR	33	30.13049-2	40	30.324S	36	30.9691-5500	34
30.0192-10966	123	30.104E	33	30.13049-4	40	30.324SB	36	30.9826-1	41
30.0192-11007	123	30.104NBR	33	30.13049-5	40	30.325X	36	30.9826-2	41
30.0192-11016	123	30.104SIH	33	30.13066	98	30.3305E	34	30.9884S	68
30.0192-11093	124	30.105.3CR	33	30.13086	51	30.3310E	34	30.9884X	54
30.0192-11137	124	30.105.3NBR	33	30.130CR	33	30.331	35	30.9885	54
30.0192-11278	124	30.105.7CR	33	30.130NBR	33	30.333X	35	30.9996-10	35
30.0192-11342	124	30.105.7NBR	33	30.13144XX	68	30.340	39	30.9996-4	41
30.0192-11385	124	30.105CR	33	30.13242	41	30.4003E	34	30.9996-5	41
30.0192-11484	123	30.105E	33	30.132CR	33	30.4437	40	30.E368	68
30.0192-11527	123	30.105NBR	33	30.132NBR	33	30.4469	40	30.OT0136	52
30.0192-11550	124	30.105SIH	33	30.13421	38	30.5003E	34	30.OT101	55
30.0192-11800	123	30.106.5CR	33	30.13447-8	39	30.5003K	34	30.OT1024	34
30.0192-11937	124	30.106.5NBR	33	30.13503	41	30.5004E	34	30.OT1024B	34
30.0192-11991	124	30.106CR	33	30.13503	41	30.5005E	34	30.OT1057	55
30.0192-12300	124	30.106E	33	30.13535	52	30.5010E	34	30.OT10644	38
30.0192-12398	124	30.106NBR	33	30.135E	33	30.50967	38	30.OT1080	56
30.0192-12418	123	30.106SIH	33	30.135NBR	33	30.5179	39	30.OT1081	56
30.0192-12442	124	30.107.5CR	33	30.136/45	55	30.5550M	37	30.OT1387	38
30.0192-12465	124	30.107.5NBR	33	30.136	55	30.5808E	34	30.OT2036	55
30.0192-12642	123	30.10777-1	52	30.136NBR	55	30.5881	36	30.OT3271	56
30.0192-1345	124	30.107CR	33	30.13841	38	30.5981	37	30.OT3272	38
30.0192-1494	124	30.107E	33	30.1386	52	30.6487	56	30.°T3334F	56
30.0192-1744	124	30.107NBR	33	30.138NBR	55	30.6502.5E	34	30.OT3354	38
30.0192-1768	124	30.108.4CR	33	30.138S	55	30.6622	51	30.OT3394	50
30.0192-1881	124	30.108.4NBR	33	30.14053	38	30.6622N	51	30.OT3440	52
30.0192-1949	124	30.108CR	33	30.14 O	55	30.6648	36	30.shore20-90	125
30.0192-2029	124	30.108E	33	30.14098-2	36	30.6648G	36	30.shoreA	125
30.0192-2067	124	30.108NBR	33	30.140CR	33	30.6648S	36	30.shoreD	125
30.0192-2076	123	30.108SIH	33	30.140NBR	33	30.6705E	34	30.SM251	56
30.0192-2364	124	30.108SIHX	33	30.14130	38	30.6710E	34	30.W1660	34
30.0192-2408	124	30.109.5CR	33	30.141	39	30.6724	51	31.018S	50
30.0192-2819	123	30.109.5NBR	33	30.14163-1	39	30.6944	37	31.018X	50
30.0192-2845	124	30.109CR	33	30.14163	39	30.7106	37	31.021S	50
30.0192-2969	123	30.109E	33	30.14227	53	30.7266	40	31.022S	50
30.0192-3161	123	30.109NBR	33	30.1428	38	30.7300/4	37	31.025S	50
30.0192-3214	123	30.110CR	33	30.142S	39	30.7300/4Y	37	31.035S	54
30.0192-3365	124	30.110E	33	30.14356	53	30.7300	37	31.036SI-LTC	54
30.0192-3375	123	30.110NBR	33	30.144	39	30.7367	34	31.036SI	54
30.0192-3414	123	30.111CR	33	30.14507-1	51	30.7408X	55	31.037	54
30.0192-3415	123	30.111NBR	33	30.14507-2	51	30.7411	40	31.037SI	53
30.0192-3497	124	30.112CR	33	30.14507-3	53	30.7505E	34	31.038SI	54
30.0192-3551	124	30.112E	33	30.145	39	30.7508	52	31.041S	50
30.0192-3588	124	30.112NBR	33	30.148S	55	30.7509	52	31.042S	50
30.0192-3616	124	30.11393	50	30.15005E	34	30.7519	53	31.043S	51
30.0192-3693	124	30.113CR	33	30.15005KE	34	30.7519NBR	53	31.047	50
30.0192-3739	123	30.113E	33	30.150CR	33	30.7559	38	31.048	53
30.0192-3845	124	30.113NBR	33	30.15170	38	30.762	40	31.050	53
30.0192-3877	123	30.11459	51	30.16239	41	30.7645	38	31.060S	50
30.0192-3900	124	30.114CR	33	30.16688	40	30.7648	37	31.061S	51
30.0192-4588	123	30.114E	33	30.176	56	30.7649-12	36	31.063	50
30.0192-4626	124	30.114NBR	33	30.180	56	30.7649-8	36	31.064	51
30.0192-4633	123	30.115CR	33	30.182	55	30.7649	36	31.065S	51
30.0192-4634	123	30.115E	33	30.190	38	30.7650	36	31.066	51
30.0192-4690	124	30.116CR	33	30.2005E	34	30.7651	37	31.068S	51
30.0192-4733	123	30.116E	33	30.211.04.385	54	30.7652	35	31.070S	52
30.0192-4756	123	30.116NBR	33	30.21101205	53	30.7663	39	31.071S	52
30.0192-4792	123	30.11774	52	30.21202300	40	30.7696	34	31.074S	52
30.0192-4906	123	30.117E	33	30.2151	36	30.7780/4	37	31.112S	59
30.0192-4926	123	30.118CR	33	30.2151S	36	30.7932	35	31.116S	59

31.145S	59	33.1163	8	33.371FX	24	33.452R	23	33.544	28
31.148	59	33.12116	15	33.371X	9	33.452X	15	33.545	28
31.155	59	33.200POM	31	33.372X	13	33.453X	15	33.546	28
31.216GS	51	33.200POMX	31	33.374	10	33.454X	14	33.547	28
31.216ST	51	33.201POM	31	33.375	11	33.455	15	33.548	28
31.365	59	33.203POM	31	33.376	10	33.456F	25	33.550	27
31.369	39	33.210POM	31	33.376F	24	33.457	14	33.551	28
31.6701	59	33.211POM	31	33.377	10	33.457S-4	14	33.552	27
31.6702	59	33.212POM	31	33.378	11	33.457S-5	14	33.553	27
31.6703	59	33.213POMX2	31	33.379	11	33.457S-6	14	33.554	27
31.702	40	33.214POM	31	33.380	11	33.457ST	14	33.555	27
31.OT2179	56	33.215POM	31	33.381	13	33.458A	17	33.556	27
32.009S	60	33.216POM	32	33.382	18	33.458F	25	33.560	29
32.016S	57	33.217POM	32	33.383	18	33.459A	17	33.561	29
32.034S	57	33.218POM	32	33.383F	25	33.459B	17	33.562	29
32.036S	57	33.220POM	32	33.386	18	33.459P	17	33.563	29
32.036X	57	33.306	6	33.395F	24	33.459XB	17	33.564	29
32.044S	57	33.307	6	33.395X	13	33.460-2C	17	33.565	29
32.046S	57	33.307A	6	33.395XA	13	33.460-2F	25	33.566	29
32.047	57	33.308	6	33.396	13	33.460-4C	17	33.567	29
32.057	58	33.308A	6	33.398	13	33.460-6A	18	33.568	30
32.064S	58	33.308POM	31	33.398X	13	33.460-6C	18	33.569	30
32.066	58	33.308POMG	31	33.401G	6	33.460-6K	17	33.570	30
32.075	58	33.308POMXG	31	33.403F	24	33.460-6XL	18	33.571	30
32.076	59	33.308SS304	23	33.407A	13	33.462R	23	33.572	30
32.095S	58	33.308SS316	23	33.408A	13	33.463	11	33.573	30
32.1024S	57	33.310SS-316EPDM	25	33.408B	13	33.463A	11	33.574	30
32.1025S	57	33.310SS304	23	33.408X	13	33.464	15	33.575	30
32.1025SK	57	33.310SS316	23	33.409	6	33.465A	17	33.576	30
32.1037S	58	33.310X	6	33.409F	24	33.465B	17	33.577	30
32.1045S	58	33.311	26	33.409POM	31	33.465C	17	33.578	30
32.1045SK	57	33.312	26	33.409POMX	31	33.466	15	33.579	30
32.1301	60	33.319	14	33.410POMX	31	33.468B	9	33.615	97
32.1307S	59	33.321	14	33.410SS304	23	33.468F	24	33.624	98
32.1640	58	33.323	14	33.410SS316	23	33.469X	9	33.625	98
32.165	58	33.324CR	14	33.410X	6	33.470	15	33.671	97
32.2024CR	57	33.326	15	33.410XG	6	33.471	18	33.672	97
32.2024M	57	33.331	15	33.411	6	33.472	18	33.673	97
32.2045M	57	33.332B	15	33.414	7	33.473	17	33.674	98
32.255S	58	33.332X	15	33.414SS304	23	33.474	18	33.675	98
32.300X	60	33.335	14	33.415	7	33.475	17	33.676	98
32.301X	60	33.338F	24	33.416	98	33.478	16	33.677F	24
32.309X	60	33.339X	15	33.417TPE	32	33.479	17	33.678F	24
32.409X	60	33.340	15	33.417TPEX	32	33.480	13	33.679F	24
32.512	58	33.351	12	33.418SS304	23	33.481	10	33.680F	25
32.514S	58	33.351A	11	33.418SS316	23	33.481A	10	33.681F	24
32.516S	58	33.353	10	33.418X	6	33.481B	10	33.682F	25
32.523S	58	33.353NBR	10	33.419	6	33.482	17	33.683F	25
32.527	58	33.353X	10	33.419A	7	33.483	17	33.848	29
32.7125	59	33.354	9	33.420FX	24	33.506	13	33.9779	13
32.7195S	59	33.354A	9	33.420H	6	33.510	26	34.018X	50
32.754S	58	33.354B	9	33.420X	6	33.511	27	34.031X	50
32.795S	59	33.355B	12	33.422	6	33.512	27	34.035	51
32.8517	39	33.355F	24	33.424	32	33.513	27	34.117/6	53
32.8518	38	33.357X	10	33.424TPE	32	33.514	27	34.14334X	50
32.8520	39	33.358A	9	33.424TPEX	32	33.515	27	34.3011	73
32.866	59	33.358B	9	33.426	7	33.516	28	34.3020	73
32.924	57	33.358D	9	33.426A	6	33.517	28	34.3032	72
32.924K	57	33.358E	9	33.426GA	7	33.518	28	34.601	72
32.924K	60	33.358F	24	33.426X	7	33.519	28	34.601G	72
33.019	15	33.358X	9	33.426XA	7	33.520	28	34.602	72
33.020	14	33.359X	10	33.427X	6	33.521	28	34.602G	72
33.020NBR	15	33.360	10	33.428	7	33.523	28	34.603	72
33.021	9	33.360F	25	33.428G	8	33.524	28	34.603G	72
33.022	15	33.360NBR	10	33.429	26	33.525	29	34.604	72
33.024	14	33.360R	23	33.430	7	33.526	27	34.606	74
33.025	11	33.360X	10	33.430A	7	33.527	26	34.606X	74
33.026	18	33.362	11	33.431A	27	33.528	27	34.607	74
33.026X	18	33.362C	11	33.432	6	33.529	26	34.607X	74
33.026XA	18	33.362D	11	33.433	7	33.530	26	34.608X	74
33.094X	7	33.362E	11	33.434	6	33.531	26	34.609X	74
33.1153	7	33.362F	25	33.435X	7	33.532	26	34.613	72
33.1153A	7	33.362FX	24	33.436	18	33.533	27	34.614	72
33.1153GA	7	33.362I	11	33.438	6	33.534	26	34.620010X	72
33.1154	7	33.362K	11	33.439A	18	33.535	27	34.620040X	72
33.1155	8	33.362X	10	33.442	18	33.536	26	34.620140	73
33.1156	8	33.365X	10	33.443X	18	33.537	26	34.620210	72
33.1157	8	33.367	11	33.444A	13	33.538	26	34.62039	73
33.1158A	8	33.367X	11	33.444X	13	33.539	26	34.62041	73
33.1159	8	33.369	9	33.449	14	33.540	26	34.620420	73
33.1160	8	33.370NBR	9	33.450NBR	14	33.541	26	34.624	73
33.1161	8	33.371	9	33.451E	14	33.542	28	34.625	73
33.1162	8	33.371E EMV - EMC - EMI	9	33.452BA	16	33.543	28	34.62610S	73

34.626.....	73	35.2505K.....	63	36.105E.....	61	36.2020SIHF.....	65	36.60802.....	71
34.62713H.....	73	35.2506.....	62	36.106CR.....	61	36.208.....	62	36.60802CR.....	71
34.62713S.....	74	35.2508K.....	63	36.106E.....	61	36.2502CR.....	71	36.60803.....	71
34.636.....	73	35.2510.....	62	36.106EG.....	61	36.2503.....	64	36.60804.....	71
34.637.....	73	35.2510K.....	63	36.106ESP.....	61	36.2505.....	64	36.60804CR.....	71
34.641.....	72	35.2515.....	62	36.107CR.....	61	36.2505SIHF.....	65	36.60805.....	71
34.643.....	72	35.2515K.....	63	36.107E.....	61	36.2510.....	64	36.60808.....	71
34.644.....	72	35.2520.....	62	36.108CR.....	61	36.2510SIH.....	65	36.60808CR.....	71
34.677.....	74	35.2520K.....	63	36.108E.....	61	36.2515.....	64	36.61001.....	71
34.678.....	74	35.2525.....	62	36.108EG.....	61	36.2515SIH.....	65	36.61002.....	71
34.7102-50.....	72	35.2525K.....	63	36.109E.....	61	36.2520.....	64	36.61003.....	71
34.7196.....	72	35.2806K.....	63	36.110CR.....	61	36.2520E.....	63	36.61003CR.....	71
34.7199.....	72	35.3003K.....	63	36.110E.....	61	36.2520SIH.....	65	36.61004.....	71
34.7514.....	73	35.3005.....	62	36.111E.....	61	36.2525E.....	63	36.61005.....	71
34.7528-2.....	40	35.3005K.....	63	36.112CR.....	61	36.2525SIH.....	65	36.61008.....	71
35.0806.....	62	35.3006K.....	63	36.112E.....	61	36.3003.....	64	36.61010.....	71
35.0806K.....	63	35.3007K.....	63	36.112EG.....	61	36.3005.....	64	36.61010CR.....	71
35.0808K.....	63	35.3010.....	62	lysegrå light grey.....	61	36.3005SIHK.....	65	36.61203.....	71
35.10020K.....	63	35.3010K.....	63	36.115CR.....	61	36.3005SIHKF.....	65	36.61204.....	71
35.1003.....	62	35.3012.....	62	36.117E.....	61	36.3010.....	64	36.61205.....	71
35.1003K.....	63	35.3012K.....	63	36.118CR.....	61	36.3010E.....	63	36.61310.....	71
35.1004.....	62	35.3015.....	62	36.118E.....	61	36.3010SIH.....	65	36.61502.....	71
35.1004K.....	63	35.3015K.....	63	36.119CR.....	61	36.3015CR.....	64	36.61503.....	71
35.1005.....	62	35.3020.....	62	36.1204SIHKF.....	65	36.3020.....	64	36.61505.....	71
35.1005K.....	63	35.3020K.....	63	36.1205.....	64	36.3020SIH.....	65	36.61506.....	71
35.1007.....	62	35.3025.....	62	36.1206.....	64	36.3025E.....	63	36.61508.....	71
35.1007K.....	63	35.3025K.....	63	36.120CR.....	61	36.3030.....	64	36.61510.....	71
35.1008.....	62	35.3030.....	62	36.120E.....	61	36.3055SIHKF.....	65	36.61512.....	71
35.1008K.....	63	35.3030K.....	63	36.1210.....	64	36.3314.....	62	36.61518.....	71
35.1010.....	62	35.3505.....	62	36.1210E.....	63	36.3315.....	67	36.61530.....	71
35.1010K.....	63	35.3505K.....	63	36.1212SIH.....	65	36.3351.....	67	36.61603.....	71
35.1203.....	62	35.3510.....	62	36.122CR.....	61	36.3354.....	67	36.61609CR.....	71
35.1203K.....	63	35.3510K.....	63	36.122E.....	61	36.34155105.....	62	36.61710.....	71
35.1204K.....	63	35.3535.....	62	36.125E.....	61	36.3416068.....	62	36.61808.....	71
35.1204KL.....	63	35.3535K.....	63	36.130EX.....	61	36.341840.....	62	36.62002.....	71
35.1206K.....	63	35.4003K.....	63	36.13315.....	68	36.342026.....	62	36.62002CR.....	71
35.1208K.....	63	35.4005.....	62	36.135E.....	61	36.342030.....	62	36.62003.....	71
35.1209.....	62	35.4005K.....	63	36.14044.....	68	36.342226.....	62	36.62004.....	71
35.1209K.....	63	35.4010.....	62	36.1503.....	64	36.342232.....	62	36.62004CR.....	71
35.1212.....	62	35.4010K.....	63	36.1503E.....	63	36.342433.....	62	36.62005.....	71
35.1212K.....	63	35.4012K.....	63	36.1505E.....	63	36.342529.....	62	36.62008.....	71
35.1503.....	62	35.4020.....	62	36.1505SIH.....	65	36.342840.....	62	36.62010.....	71
35.1503K.....	63	35.4020K.....	63	36.1505SIHF.....	65	36.344511.....	62	36.62020.....	71
35.1504K.....	63	35.4030.....	62	36.1510.....	64	36.3504.....	67	36.62305.....	71
35.1505K.....	63	35.4030K.....	63	36.1510E.....	63	36.3515.....	64	36.62502.....	71
35.1506K.....	63	35.4035.....	62	36.1512.....	64	36.3516.....	64	36.62505CR.....	71
35.1507.....	62	35.4035K.....	63	36.1512E.....	63	36.3520E.....	63	36.62506.....	71
35.1507K.....	63	35.4040.....	62	36.1512SIH.....	65	36.3704.....	68	36.62510.....	71
35.1510.....	62	35.4040K.....	63	36.1515.....	64	36.3813.....	67	36.62525.....	71
35.1510K.....	63	35.4505.....	62	36.1515SIH.....	65	36.3881/36.3881S.....	67	36.63005.....	71
35.1512.....	62	35.4505K.....	63	36.1515SIHKF.....	65	36.3882.....	68	36.63005CR-5952.....	71
35.1512K.....	63	35.5005.....	62	36.15387.....	68	36.3897.....	68	36.63010.....	71
35.1515.....	62	35.5006.....	62	36.1604.....	64	36.4005SIHK.....	65	36.63012.....	71
35.1515K.....	63	35.5006K.....	63	36.1605.....	64	36.4008SIHKF.....	65	36.63030CR.....	71
35.1605.....	62	35.5010.....	62	36.1610SIH.....	65	36.4010.....	64	36.63204CR.....	71
35.1605K.....	63	35.5010K.....	63	36.1612E.....	63	36.4010E.....	63	36.64003.....	71
35.1608.....	62	35.5020K.....	63	36.1616SIHF.....	65	36.4012.....	64	36.64004CR.....	64
35.1608K.....	63	35.5025.....	62	36.1808G.....	64	36.4012SIH.....	65	36.64004CR.....	71
35.1708K.....	63	35.6002K.....	63	36.1815EG.....	63	36.4015.....	64	36.64005.....	71
35.1803K.....	63	35.6010.....	62	36.1816.....	64	36.4015E.....	63	36.64005CR.....	71
35.18053K.....	63	35.6040.....	62	36.197.....	62	36.4020CR.....	64	36.64008.....	71
35.1809K.....	63	35.8020K.....	63	36.198.....	62	36.4020E.....	63	36.64010.....	71
35.1904K.....	63	36.0505.....	64	36.198A.....	62	36.4025.....	64	36.64015.....	71
35.2003.....	62	36.0806.....	64	36.198CR.....	62	36.4025E.....	63	36.64020.....	71
35.2003K.....	63	36.1005.....	64	36.198S.....	62	36.4025SIHKF.....	65	36.65003.....	71
35.20055.....	62	36.1005G.....	64	36.2002.....	64	36.4030E.....	63	36.65005.....	71
35.20055K.....	63	36.1006SIH.....	65	36.2003.....	64	36.5005CR.....	64	36.65005.....	71
35.2005.....	62	36.1007.....	64	36.2003SIH.....	65	36.5005SIH.....	65	36.65005CR-5952.....	71
35.2005K.....	63	36.1008.....	64	36.2005.....	64	36.5010.....	64	36.65005CR.....	71
35.2006K.....	63	36.1010.....	64	36.2005CR.....	71	36.5010E.....	63	36.65007CR.....	71
35.2010.....	62	36.1010CR.....	64	36.2005SIH.....	65	36.5020.....	64	36.65010.....	71
35.2010K.....	63	36.1010E.....	63	36.2005SIHF.....	65	36.5020E.....	63	36.66002.....	71
35.2010KL.....	63	36.1010SIH.....	65	36.2005SIHK.....	65	36.5020SIHKF.....	65	36.66003.....	71
35.2012.....	62	36.1010SIHKF.....	65	36.200.....	62	36.5025.....	64	36.66004.....	71
35.2012K.....	63	36.1025E.....	61	36.200.....	62	36.5025E.....	63	36.66004X.....	71
35.2015.....	62	36.102CR.....	61	36.2010.....	64	36.5030.....	64	36.67502.....	71
35.2015K.....	63	36.102E.....	61	36.2010E.....	63	36.6030E.....	63	36.68005CR-5952.....	71
35.2018.....	62	36.1035E.....	61	36.2010SIH.....	65	36.60403.....	71	36.68005CR.....	71
35.2020.....	62	36.103CR.....	61	36.2010SIHK.....	65	36.60502.....	71	36.7003.....	61
35.2020K.....	63	36.103E.....	61	36.2015SIH.....	65	36.60503.....	71	36.7004.5X.....	61
35.2207K.....	63	36.1045E.....	61	36.2020.....	64	36.60503CR.....	64	36.7004.....	61
35.2502.....	62	36.104CR.....	61	36.2020CR.....	64	36.60505.....	71	36.7005.....	61
35.2505.....	62	36.105CR.....	61	36.2020SIH.....	65	36.60605.....	71	36.7005X.....	61

36.7006.....	61	37.400.....	115	38.406-3H.....	104	38.9971020.....	116	39.4269.....	94
36.7006X.....	61	38.1215.....	117	38.406-3T.....	104	39.103195.....	92	39.4310.....	94
36.7007X.....	61	38.1215N.....	117	38.406-5T.....	104	39.1208P.....	35	39.4311.....	94
36.7008.5X.....	61	38.14572.....	116	38.407-3.....	106	39.167G.....	78	39.4333.....	93
36.7008.....	61	38.14574/3.....	116	38.407-3C.....	106	39.168G.....	78	39.4380.....	94
36.7008X.....	61	38.14574.....	116	38.407-3G.....	106	39.169G.....	78	39.4380X.....	93
36.7009.....	61	38.152EPDM.....	66	38.407-3X.....	106	39.170G.....	78	39.4381.....	94
36.7009X.....	61	38.153EPDM.....	66	38.407-3XL.....	106	39.171G.....	78	39.4399.....	93
36.7010.5X.....	61	38.154EPDM.....	66	38.410200.....	112	39.171J.....	78	39.4403.....	94
36.7010.....	61	38.155EPDM.....	66	38.410201.....	112	39.172.....	79	39.55.....	94
36.7010X.....	61	38.156EPDM.....	66	38.418.....	106	39.173.....	79	39.56.....	94
36.7011.5X.....	61	38.158EPDM.....	66	38.418N.....	106	39.174.....	78	39.57.....	94
36.7011X.....	61	38.160E/K.....	71	38.419A.....	108	39.175H.....	78	39.620J.....	79
36.7012.....	61	38.160EPDM.....	66	38.419C.....	107	39.175J.....	78	39.623J.....	79
36.7012X.....	61	38.162EPDM.....	66	38.420X.....	108	39.177.....	78	39.624.....	79
36.7014X.....	61	38.165EPDM.....	66	38.423-1750.....	115	39.178.....	78	39.625.....	79
36.7015.....	61	38.170E/K.....	71	38.424-1800.....	115	39.179.....	78	39.626J.....	79
36.7018X.....	61	38.170EPDM.....	66	38.425-3.....	109	39.180.....	8 ²	39.627.....	79
36.7028X.....	61	38.175E/K.....	71	38.425-3C.....	109	39.181052.....	79	39.628.....	79
36.7050.....	61	38.175EPDM.....	66	38.425-5.....	109	39.181060.....	79	39.629.....	80
36.7064X.....	61	38.180NR.....	66	38.425-5C.....	109	39.181061.....	79	39.630.....	80
36.720802.....	70	38.188.....	71	38.425N-3.....	109	39.181.....	82	39.631A.....	80
36.720803.....	70	38.189.....	71	38.425N-5.....	109	39.182.....	82	39.631X.....	80
36.720903.....	70	38.190.....	71	38.426-3.....	109	39.183.....	82	39.632A.....	78
36.720904.....	70	38.191.....	71	38.426-3C.....	109	39.183A.....	82	39.632B.....	78
36.721004-6.....	70	38.201.5.....	117	38.426-3CX.....	109	39.183B.....	82	39.632C.....	78
36.721004.....	70	38.202.....	117	38.426-3XL.....	109	39.183C.....	82	39.632J.....	78
36.721005.....	70	38.203.....	117	38.426-5.....	109	39.184.....	82	39.634.....	80
36.721006.....	70	38.205.....	117	38.426-5C.....	109	39.185.....	82	39.634P.....	80
36.721202.....	70	38.27700002.....	71	38.426-5CX.....	109	39.186.....	82	39.635.....	81
36.721203.....	70	38.27700003.....	71	38.426-8C.....	109	39.187.....	82	39.635X.....	81
36.7213564.....	70	38.27700004.....	71	38.427-3CXL.....	105	39.188.....	82	39.636.....	81
36.721503.....	70	38.27700005.....	71	38.427-3GC.....	105	39.20/15-M5.....	87	39.636X.....	81
36.721504.....	70	38.27700006.....	71	38.429-2.....	104	39.20/8-M8.....	87	39.637.....	79
36.721508.....	70	38.27700008.....	71	38.430-10/70.....	116	39.2486.....	93	39.638.....	79
36.721508B.....	70	38.27700010.....	71	38.430-10/90.....	116	39.2776.....	94	39.642.....	80
36.722004.....	70	38.27700015.....	71	38.430-3/70.....	116	39.30/17.....	89	39.642: SBR & rayon.....	80
36.730805H.....	68	38.27700020.....	71	38.430-5/70.....	116	39.3010.....	93	39.642X.....	80
36.730808.....	68	38.27700025.....	71	38.430-5/80.....	116	39.3023.....	94	39.643X.....	80
36.730810.....	69	38.400-10.....	102	38.430-6/90.....	116	39.3029.....	94	39.644.....	80
36.730906.....	69	38.400-12.....	102	38.430-8/70.....	116	39.3051.....	94	39.644A.....	80
36.730906H.....	69	38.400-15.....	102	38.430-8/90.....	116	39.3240.....	93	39.644A NR/SBR.....	80
36.730907.....	69	38.400-20.....	102	38.431-3.....	109	39.3366.....	94	39.645.....	83
36.730907G.....	69	38.400-2.....	102	38.431-3C.....	109	39.3381.....	94	39.646.....	79
36.730907H.....	69	38.400-3.....	102	38.431-5.....	109	39.3428.....	94	39.647.....	80
36.730955.....	69	38.400-4.....	102	38.431-5C.....	109	39.3581.....	94	39.648.....	80
36.730955B.....	69	38.400-5.....	102	38.431.....	109	39.360.....	79	39.649.....	80
36.730955G.....	69	38.400-6/650.....	102	38.432.....	105	39.36412.....	94	39.650.....	80
36.730955H.....	69	38.400-6.....	102	38.434.....	107	39.3700.....	94	39.651.....	80
36.731210.....	69	38.400-8.....	102	38.434A.....	107	39.3722.....	93	39.651A.....	80
36.731210H.....	69	38.401-10.....	102	38.435C.....	107	39.3726.....	94	39.651.....	80
36.731412D.....	69	38.401-15.....	102	38.436C.....	108	39.3802.....	94	39.652.....	80
36.732115.....	69	38.401-2.....	102	38.440-6.....	115	39.3803.....	94	39.653.....	80
36.740907H.....	69	38.401-3.....	102	38.440-6B.....	115	39.3813.....	94	39.656.....	81
36.80955S.....	69	38.401-4.....	102	38.440-8.....	115	39.3815.....	94	39.657.....	81
36.90810.....	69	38.401-5.....	102	38.440-8A.....	115	39.3846.....	93	39.658.....	81
36.9086S.....	68	38.401-6.....	102	38.440-8X.....	115	39.3849.....	94	39.659.....	81
36.9088S.....	68	38.402-0.5.....	103	38.449-1200.....	116	39.3868.....	93	39.660.....	81
36.92117.....	69	38.402-1.....	103	38.449-1600.....	116	39.3872.....	93	39.661.....	81
36.B380.....	67	38.402-2.....	103	38.449-750.....	116	39.3873.....	93	39.662.....	81
36.K608.....	66	38.402-3.....	103	38.450-760.....	116	39.3874.....	93	39.663.....	81
36.K613.....	66	38.402-4.....	103	38.451-1600.....	116	39.3875.....	93	39.664.....	81
36.K616.....	66	38.402-5.....	103	38.452-1200.....	116	39.3876.....	93	39.665.....	81
36.K671.....	66	38.403-2.....	103	38.5017530.....	112	39.3878.....	94	39.674.....	93
36.K675.....	66	38.403-3.....	103	38.5017530A.....	112	39.3879.....	94	39.678.....	93
36.K676.....	66	38.403-4.....	103	38.5501110.....	114	39.3887.....	93	39.678X.....	93
36.K677.....	66	38.403-5.....	103	38.5501210.....	114	39.3923.....	94	39.680H-1180.....	93
36.K678.....	66	38.403-6.....	103	38.5501310.....	114	39.3925.....	94	39.680H.....	93
36.K679.....	67	38.403-8.....	103	38.623750.....	114	39.3952.....	94	39.680X.....	93
36.K680.....	67	38.404-10.....	103	38.623752.....	114	39.4012.....	94	39.684X.....	93
36.K681.....	67	38.404-20.....	103	38.623764.....	114	39.4054.....	94	39.684XS.....	93
36.K683.....	67	38.404-2.....	103	38.8100110.....	111	39.4087.....	93	39.685.....	93
36.K695.....	67	38.404-3.....	103	38.8100310.....	111	39.4110.....	94	39.69.....	94
36.K697.....	67	38.404-4.....	103	38.8103110.....	111	39.4129.....	94	39.79.....	94
36.K698.....	67	38.404-5.....	103	38.9110030.....	113	39.4156.....	93	39.93.....	94
36.K852.....	67	38.405-10.....	104	38.9117630.....	113	39.4178.....	93	39.AV2024.....	91
36.K853.....	67	38.405-10X.....	104	38.9117631.....	113	39.4224.....	94	39.AV30.....	91
37.250.....	110	38.405-15.....	104	38.9716230.....	113	39.4229.....	94	39.AV5068.....	91
37.251.....	110	38.405-20.....	104	38.9726230.....	111	39.4244.....	94	39.AV9580.....	91
37.260.....	115	38.405-40.....	104	38.9730030.....	111	39.4249.....	94	39.B08/08-43.....	85
37.260B.....	115	38.405-6.....	104	38.9730030S.....	111	39.4250.....	94	39.B08/08-4M4-43.....	85
37.260C.....	115	38.4 ⁹ S-8.....	104	38.9750030.....	111	39.4251.....	94	39.B10/10.....	85
37.263.....	115	38.406-2T.....	104	38.9971010.....	116	39.4257.....	94	39.B100/120-120.....	85

39.B100/30	85	39.C30/20	86	39.D30/30	87	39.E30/35	89	39.M20/15-A4	84
39.B100/40	85	39.C30/22	86	39.D30/52-A2-8	87	39.E40/15-SH.43	89	39.M20/20-A2	84
39.B100/50	85	39.C30/30-A4	86	39.D30/8-M6G	87	39.E40/20-M6	89	39.M20/8-M6	84
39.B100/75-55	85	39.C30/30	86	39.D30/8-M6GX	87	39.E40/20	89	39.M2015	84
39.B100/75	85	39.C30/40	86	39.D30/8-M6x18	87	39.E40/20NBR	89	39.M2020-M6-45	84
39.B15/10	85	39.C40/20	86	39.D30/8-M6x23	87	39.E40/30	89	39.M2020-M8	84
39.B15/15-M4x8	85	39.C40/25	86	39.D40/15-M6	87	39.E50/20-M10	89	39.M2020	84
39.B15/15-M5x10	85	39.C40/30	86	39.D40/15	87	39.E50/20-M12	89	39.M24	83
39.B15/15-R11	85	39.C40/40-M10	86	39.D40/20-A2	87	39.E50/20	89	39.M25/10-M6ESD	84
39.B15/15	85	39.C40/40	86	39.D40/20-M10	87	39.E50/25-M12	89	39.M25/10-M8	84
39.B15/20	85	39.C40/50-68	86	39.D40/20-M6-43	87	39.E50/25	89	39.M25/10-M8x10/20	84
39.B16/18	85	39.C40/50	86	39.D40/20-M6	87	39.E50/40-M12	89	39.M25/22	84
39.B20/10-M6	85	39.C50/20	86	39.D40/20	87	39.E50/40	89	39.M2515-55	84
39.B20/10	85	39.C50/25	86	39.D40/25-A2-S	87	39.E60/30-M12	89	39.M2515	84
39.B20/15-A4	85	39.C50/30-68	86	39.D40/25-A2	87	39.E60/30	89	39.M2520-M6	84
39.B20/15-M6-43	85	39.C50/30-A2	86	39.D40/30-A2	88	39.E60/40-M12	89	39.M2520	84
39.B20/15-M6	85	39.C50/30-M8	86	39.D40/30-M8	88	39.E60/40	89	39.M30/10	84
39.B20/15	85	39.C50/30	86	39.D40/30-M8x23	88	39.E70/35	89	39.M30/20XX	84
39.B20/20-M6-43	85	39.C50/35-43	86	39.D40/30	88	39.E70/50	89	39.M3015-M8x15	84
39.B20/20-M6	85	39.C50/35	86	39.D40/35-A2	88	39.E75/30-M12	89	39.M3015	84
39.B20/20-M6x15-43	85	39.C50/40-M12	86	39.D40/35-M8-A2	88	39.E75/30	89	39.M3020-55	84
39.B20/25-M6	85	39.C50/40	86	39.D40/35	88	39.E75/45-M12	89	39.M3020	84
39.B2020	85	39.C50/45	86	39.D40/38	88	39.E75/50-M12	89	39.M3030-SS	84
39.B25/25-M6	85	39.C50/50	86	39.D40/40-A2	88	39.E75/50	89	39.M3030	84
39.B25/25	85	39.C60/30-M8	86	39.D40/40-M8x23-68	88	39.E80/50-M16	89	39.M40/20	84
39.B25/30	85	39.C60/30	86	39.D40/40	88	39.E80/50	89	39.M40/38-M12	84
39.B2513	85	39.C60/40-M10	86	39.D40/45-A2	88	39.GMFI00/42	91	39.M40/40-A2	84
39.B30/20-M6x10-43	85	39.C60/40-M12	86	39.D50/20-M10x15	88	39.GMFI08/46	91	39.M40/40	84
39.B30/20-M6x10-57	85	39.C60/40	86	39.D50/20-M12	88	39.GMFI22/50	91	39.M40/50-A2	84
39.B30/20	85	39.C60/45	86	39.D50/20	88	39.GMFI50/54	91	39.M4025	84
39.B30/20NBR	85	39.C65/35-M10	86	39.D50/25	88	39.GMFI67/34-SH.40	91	39.M4030	84
39.B30/20X	85	39.C65/35	86	39.D50/30-M10-A2	88	39.GMFI67/34	91	39.M4038	84
39.B30/20XX	85	39.C70/45-M10	86	39.D50/30-M10	88	39.GMFI75/34	91	39.M50/20-M10X	84
39.B30/20XXX	85	39.C70/50-A2	86	39.D50/30-M10x38	88	39.KD25/17	91	39.M50/20NBR	84
39.B30/25-43	85	39.C75/30-M10-68	86	39.D50/30	88	39.KD50/18	91	39.M50/30-A2	84
39.B30/30-M6-M8x2385	85	39.C75/30-M10	86	39.D50/40-43	88	39.KP-D10/10	91	39.M50/30NBR	84
39.B30/30-M6	85	39.C75/30	86	39.D50/40	88	39.KP-D115/136	91	39.M5025	84
39.B30/40	85	39.C75/50	86	39.D50/40NBR	88	39.KP-D118/77	91	39.M5030	84
39.B3030	85	39.C75/55-43A	86	39.D50/50	88	39.KP-D15/22	91	39.M5040	84
39.B40/20	85	39.C75/55-M10	86	39.D50/60	88	39.KP-D20/15	91	39.M5045	84
39.B40/30-M8x10-43	85	39.C75/55	86	39.D50/80	88	39.KP-D25/16	91	39.M5050	84
39.B40/30	85	39.D10/10-A2	87	39.D60/30-M12	88	39.KP-D25/20	91	39.M60/50	85
39.B40/35	85	39.D10/10	87	39.D60/30	88	39.KP-D30/30	91	39.M6035	84
39.B50/20-M8	85	39.D100/30	88	39.D60/40	88	39.KP-D30/36-A2	91	39.M6050	84
39.B50/25	85	39.D100/50	88	39.D60/40M12	88	39.KP-D30/36-A4	91	39.M7540	84
39.B50/30	85	39.D100/75	88	39.D60/50	88	39.KP-D30/36	91	39.M7550	84
39.B50/40-43	85	39.D13/13-M8x35	87	39.D65/35	88	39.KP-D50/50	91	39.M7560	84
39.B50/40	85	39.D15/10-M6	87	39.D70/40-M12	88	39.KP-D50/58	91	39.M8050	84
39.B50/50-M10	85	39.D15/10	87	39.D70/40	88	39.KP-D50/61	91	39.M9/12-43	84
39.B50/50	85	39.D15/15-M6	87	39.D70/45-M10x12	88	39.KP-D50/67	91	39.VP22/10-20/24	92
39.B60/30	85	39.D15/15	87	39.D75/40-68	88	39.KP-D60/40	91	39.VP22/12-25/28	92
39.B60/40	85	39.D15/4G-M4x6	87	39.D75/50-M10/sh68	88	39.KP-D70/58	91	39.VP25/10-20/25	92
39.B60/45-A2	85	39.D150/50	88	39.D75/50-M10	88	39.KP-D70/60	91	39.VP26/8,5-25/25	92
39.B75/30	85	39.D20/10-A4	87	39.D75/50-M12	88	39.KP-D75/89-10	91	39.VP27/14-40/48	92
39.B75/40-M10x18	85	39.D20/10	87	39.D8/5	87	39.KP-D75/89	91	39.VP30/13-40/40	92
39.B75/40-M12x40	85	39.D20/15E	87	39.E10/10-M4	89	39.KP-E10/10	91	39.VP30/14-25/28	92
39.B75/40-M8x18X	85	39.D20/20-M6	87	39.E100/25	89	39.KP-E115/136	91	39.VP30/14-67/76	92
39.B75/40	85	39.D20/20-M6x43	87	39.E100/30	89	39.KP-E118/77	91	39.VP32/16-50/54	92
39.B75/50	85	39.D20/20	87	39.E100/40	89	39.KP-E15/22	91	39.VP40/25-20/20	92
39.BUMPER-CAR	95	39.D25/10-M6+6	88	39.E100/40NBR43	89	39.KP-E20/15	91	39.VP40/25-30/30	92
39.BUMPER	121	39.D25/15-A2	87	39.E100/40NBR68	89	39.KP-E20/24	91	39.VP45/20-60/63	92
39.BUMPERB	121	39.D25/15	87	39.E100/40NBR	89	39.KP-E25/16	91	39.VP50/25-30/34	92
39.BUMPERC	121	39.D25/18	87	39.E100/55NBR68	89	39.KP-E25/20	91	39.VP50/25-65/68	92
39.BUMPERD	121	39.D30/10-68	87	39.E100/75	89	39.KP-E30/30	91	39.VP50/25-80/85	92
39.C100/40	86	39.D30/10-68	87	39.E150/50-M20	89	39.KP-E30/36	91	39.VP55/15,5-30/16	92
39.C100/50	86	39.D30/10-A2	87	39.E150/50	89	39.KP-E35/40	91	39.VP60/30-60/68	92
39.C100/55NBR68	86	39.D30/10-M6	87	39.E150/75-M20	89	39.KP-E50/50	91	39.VP62/36-65/71	92
39.C100/60-M12	86	39.D30/10-M6x15	87	39.E20/10-M6	89	39.KP-E50/61	91	39.VP64/38-80/88	92
39.C100/75	86	39.D30/10-M6x28	87	39.E20/10	89	39.KP-E50/67	91	41.13459	41
39.C150/40	86	39.D30/10	87	39.E20/25-68	89	39.KP-E50/68	91	41.13459	41
39.C150/75-M20	86	39.D30/12-M6G	87	39.E25/10-M6	89	39.KP-E60/40	91	41.13459X	41
39.C20/10	86	39.D30/15-M10x25	87	39.E25/10	89	39.KP-E70/58	91	41.333S	35
39.C20/15	86	39.D30/15-M10x50	87	39.E25/25-68	89	39.KP-E70/60	91	41.406	42
39.C20/20-A4	86	39.D30/15-M6	87	39.E25/25	89	39.KP-E75/89-M10	91	41.670	41
39.C20/20	86	39.D30/15-M6G	87	39.E30/10-M6-43	89	39.KP-E75/89	91	41.674A	35
39.C20/25-VMQ	86	39.D30/15-M8x23	87	39.E30/10-M6G	89	39.KP-E95/80	91	41.675A	35
39.C200/100	86	39.D30/15	87	39.E30/15-M6	89	39.M10/10	84	41.678	36
39.C25/10	86	39.D30/18-M10	87	39.E30/15-M6G	89	39.M100/50NBR	84	45.102G	76
39.C25/15-A2	86	39.D30/20-M6-43	87	39.E30/15	89	39.M100/55-40	84	45.123	76
39.C25/15	86	39.D30/20-M6	87	39.E30/20-M6	89	39.M15/15	84	45.2031024	76
39.C25/25-M8	86	39.D30/20-M8x15	87	39.E30/20	89	39.M1810	84	45.20511046	76
39.C25/25	86	39.D30/20	87	39.E30/30-M6	89	39.M20/10-M6	84	45.20511091	76
39.C30/15	86	39.D30/30-M6	87	39.E30/30	89	39.M20/10	84	45.2051445	77

45.205SX.....	42	50.083040G.....	47	57.401/3EJ.....	97	Group 0010	43	Group 0173.....	45
45.206AL.....	75	50.083040GG.....	47	57.402/3E.....	96	Group 0011.....	43	Group 0174.....	46
45.208.....	42	50.083040GS.....	47	57.402/3EJ.....	96	Group 0012.....	43	Group 0175.....	43
45.209BX.....	42	50.083045G.....	47	57.402/3EJ.....	97	Group 0020.....	43	Group 0176.....	45
45.210BX.....	42	50.083045X.....	47	57.403/2.5J.....	97	Group 0021.....	43	Group 0177.....	45
45.210C.....	42	50.083046.....	47	57.403/3E.....	96	Group 0022.....	43	Group 0178.....	43
45.210CX.....	42	50.083050.....	47	57.404/3E.....	96	Group 0023.....	43	Group 0179.....	44
45.216C-50.....	76	50.083050GG.....	47	57.405/2J.....	97	Group 0024.....	43	Group 0180.....	45
45.217C.....	75	50.083050H.....	47	57.405/3E.....	96	Group 0025.....	43	Group 0181.....	44
45.221C.....	75	50.083052G.....	48	57.406/3E.....	96	Group 0030.....	43	Group 0182.....	45
45.224.....	75	50.083055G.....	48	57.407/3E.....	96	Group 0100.....	43	Group 0183.....	45
45.235NI057.....	77	50.083060.....	48	57.408/3E.....	96	Group 0101.....	43	Group 0184.....	46
45.235N429.....	77	50.083060GG.....	48	57.410/3E.....	96	Group 0102.....	44	Group 0184.....	46
45.235NGI057.....	77	50.083061.....	48	57.411/3E.....	96	Group 0102A.....	44	Group 0185.....	46
45.235NG429.....	77	50.083065.....	48	57.412/3E.....	96	Group 0103.....	44	Group 0186.....	43
45.308C-50.....	76	50.083070B.....	48	57.413/3E.....	96	Group 0103A.....	44	Group 0187.....	45
45.308C.....	76	50.083070G.....	48	57.423/3E.....	96	Group 0104.....	44	Group 0188.....	44
45.309C-50.....	76	50.083070GG.....	48	57.424/3E.....	96	Group 0105.....	44	Group 0189.....	45
45.309C.....	76	50.083080G.....	48	57.425/3E.....	96	Group 0106.....	43	Group 0190.....	45
45.347C.....	75	50.083081.....	48	57.426/3E.....	96	Group 0107.....	43	Group 0191.....	44
45.383C.....	75	50.083088.....	48	57.427/3E.....	96	Group 0108.....	43	Group 0192.....	43
45.388C.....	75	50.083089.....	48	57.428/3E.....	96	Group 0109.....	43	Group 0193.....	45
45.393.....	76	50.083090.....	49	57.429/3E.....	96	Group 0110.....	43	Group 0193.....	45
45.394.....	76	50.083095B.....	49	57.430/3E.....	96	Group 0111.....	43	Group 0194.....	44
45.705C.....	75	50.083095BB.....	48	57.431/3E.....	96	Group 0112.....	43	Group 0195.....	46
45.832.....	75	50.083095G.....	49	57.440/3E.....	96	Group 0113.....	43	Group 0196.....	45
45.836.....	75	50.13621.....	120	57.441/3E.....	96	Group 0115.....	45	Group 0197.....	45
45.837.....	75	50.241NR.....	118	57.442/3E.....	96	Group 0116.....	45	Group 0198.....	45
45.839.....	75	50.242NR.....	118	57.443/2JP.....	97	Group 0117.....	45	Group 0199.....	44
45.872.....	75	50.243NR.....	119	57.443/3E.....	96	Group 0118.....	46	Group 0200.....	45
45.874.....	75	50.244NR.....	119	57.444/3E.....	96	Group 0119.....	43	Group 0201.....	43
45.882.....	75	50.244NRS.....	119	57.445/3E.....	96	Group 0120.....	43	Group 0202.....	45
45.884C.....	75	50.245H.....	118	57.446/3E.....	96	Group 0121.....	43	Group 0203.....	46
45.886.....	76	50.245NR.....	118	57.447/3E.....	96	Group 0122.....	45	Group 0204.....	46
45.886G.....	76	50.246NR.....	118	57.448/3E.....	96	Group 0123.....	45	Group 0205.....	45
45.894.....	76	50.247NR.....	118	57.449/3E.....	96	Group 0124.....	43	Group 0206.....	44
45.901.....	76	50.250.....	118	57.450/3E.....	96	Group 0125.....	43	Group 0207.....	44
45.980A.....	76	50.250X.....	118	57.451/3E.....	96	Group 0126.....	43	Group 0208.....	43
45.980K.....	76	50.252G.....	120	57.452/3E.....	96	Group 0127.....	44	Group 0209.....	43
45.980S.....	76	50.252J.....	120	57.453/3E.....	96	Group 0128.....	44	Group 0210.....	45
48.442.....	101	50.254J.....	120	57.454/3E.....	96	Group 0129.....	44	Group 0211.....	44
48.451.....	100	50.255J.....	120	57.455/3E.....	96	Group 0130.....	44	Group 0212.....	46
48.452.....	100	50.260-10.....	33	57.456/3E.....	96	Group 0131.....	44	Group 0213.....	45
48.542.....	101	50.260-10T.....	33	63.550301.....	101	Group 0132.....	44	Group 0214.....	43
48.544A.....	101	50.260-4.....	33	68.4250.....	101	Group 0133.....	44	Group 0215.....	45
48.603.....	99	50.260-5.....	33	79.001.....	120	Group 0134.....	44	Group 0501.....	46
48.605.....	100	50.260-6.....	33	79.002.....	120	Group 0135.....	46	Group 0502.....	46
48.605B.....	100	50.260-8.....	33	79.003.....	120	Group 0136.....	46	Group 0503.....	46
48.605X.....	100	50.261.....	119	79.004.....	120	Group 0137.....	44	Group 0504.....	46
48.605Y.....	100	50.263.....	119	79.005.....	120	Group 0138.....	45	Group 0505.....	46
48.608.....	100	50.263K-10.....	119	79.051.....	120	Group 0139.....	43	Group 0506.....	46
48.609.....	100	50.263K.....	119	79.051A.....	120	Group 0140.....	44	Group 0507.....	46
48.612.....	101	50.263KL.....	119	79.052.....	120	Group 0141.....	44	Group 0508.....	44
48.613K.....	99	50.265.....	118	79.053.....	120	Group 0142.....	45	Group 0509.....	46
48.621.....	100	50.266.....	118	79.054.....	120	Group 0143.....	45	Group 0510.....	45
48.622.....	100	50.267-10.....	119	79.054A.....	120	Group 0144.....	44	Group 0511.....	46
48.622X.....	100	50.267.....	119	79.055.....	120	Group 0145.....	44	Group 0512.....	45
48.623.....	100	50.267NR.....	119	79.056.....	120	Group 0146.....	44	Group 0513.....	46
48.623X.....	100	50.269.....	119	84.930.....	125	Group 0147.....	44	Group 0514.....	46
48.624.....	100	50.271.....	119	84.931.....	125	Group 0148.....	44	Group 0515.....	46
48.626.....	99	50.275.....	119	84.932T.....	125	Group 0150.....	43	Group 0516.....	44
48.634.....	99	50.276.....	119	84.934.....	125	Group 0151.....	45	Group 0517.....	44
48.634F.....	99	50.280.....	120	84.934A.....	125	Group 0152.....	45	Keyhole fender.....	95
48.634K.....	99	52.269X.....	56	84.935.....	125	Group 0153.....	43	KF-A-fender.....	95
48.634KF.....	99	52.CWC8.....	83	87.1034.....	126	Group 0154.....	45	KF-B-fender.....	95
48.635.....	99	52.PPI06.....	41	87.1035.....	126	Group 0155.....	44	KF-C-fender.....	95
48.635F.....	99	52.PPCC720.....	121	87.1035.....	126	Group 0156.....	45	KF-D-fender.....	95
48.635K.....	99	52.PPTLRED.....	121	87.2010.....	126	Group 0157.....	45	lysegrå light grey.....	64
48.635KF.....	99	54.261100.....	122	87.51939S.....	126	Group 0158.....	44	MC-fender.....	95
48.636.....	99	54.261120.....	122	87.51989.....	126	Group 0159.....	43	Soft - SH 45.....	93
48.636F.....	99	54.261130.....	122	87.51999F.....	126	Group 0160.....	43	sort black.....	64
48.636FX.....	99	54.261700J-5.....	122	87.52759.....	126	Group 0161.....	46	Wing-type-fender.....	95
48.636K.....	99	54.261720J-5.....	122	87.52759X.....	126	Group 0163.....	45		
48.636KF.....	99	54.261740J-5.....	122	87.7051.....	126	Group 0164.....	45		
50.083000GG.....	49	54.261760J-5.....	122	87.723.....	126	Group 0165.....	45		
50.083000SS.....	49	54.261780J-5.....	122	87.770/10.....	126	Group 0166.....	45		
50.083013.....	47	54.710720.....	47	87.81152.....	126	Group 0167.....	44		
50.083015GGX.....	47	54.710770.....	48	87.812015.....	126	Group 0168.....	45		
50.083030.....	47	56.7001-007.....	78	87.81252.....	126	Group 0169.....	43		
50.083032GG.....	47	57.400/3E.....	96	87.81302.....	126	Group 0170.....	44		
50.083033.....	47	57.401/3E.....	96	87.814015.....	126	Group 0171.....	44		
50.083040.....	47	57.401/3EJ.....	96	Egenskab gummityper.....	127	Group 0172.....	44		



BIBUS SINDBY A/S

Edisonvej 11
DK-7100 Vejle

Tel. +45 75 88 21 22

Fax +45 75 88 21 21

bibus@bibus.dk

www.bibus-sindby.dk